

# JVC


## SERVICE MANUAL

WIDE LCD PANEL TELEVISION

**LT-26A61BJ, LT-26A61BU, LT-26A61BU<sub>IC</sub>,  
LT-26A61SJ, LT-26A61SU, LT-26A61SU<sub>IC</sub>,  
LT-32A61BJ, LT-32A61BU, LT-32A61BU<sub>IC</sub>,  
LT-32A61SJ, LT-32A61SU, LT-32A61SU<sub>IC</sub>**

BASIC CHASSIS

FT

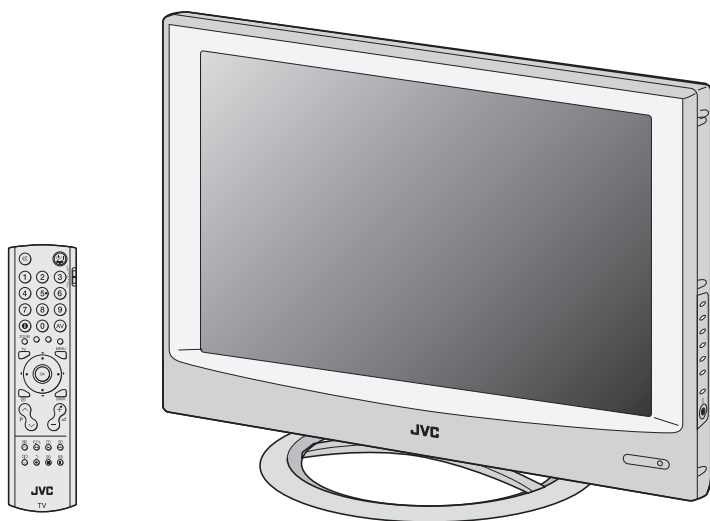

InteríArt  
**T-V LINK**  
**HD**  
ready

### TABLE OF CONTENTS

1	PRECAUTION.....	1-3
2	SPECIFIC SERVICE INSTRUCTIONS.....	1-7
3	DISASSEMBLY .....	1-10
4	ADJUSTMENT .....	1-15
5	TROUBLESHOOTING .....	1-19

## SPECIFICATION

Items	Contents	
	LT-26A61BJ LT-26A61BU LT-26A61SJ LT-26A61SU	LT-32A61BJ LT-32A61BU LT-32A61SJ LT-32A61SU
Dimensions ( W × H × D )	68.6 cm × 52.5 cm × 26.9 cm [Included stand] 68.6 cm × 47.4 cm × 12.1 cm [TV only]	82.0 cm × 60.2 cm × 26.9 cm [Included stand] 82.0 cm × 55.1 cm × 12.7 cm [TV only]
Mass	14.9 kg [Included stand] 12.3 kg [TV only]	18.8 kg [Included stand] 15.4 kg [TV only]
Power Input	AC110V - AC240 V, 50 Hz / 60 Hz	
Power Consumption	158 W (Standby: 2.1 W)	
TV RF System	CCIR (B/G, I, D/K, L)	
Colour System	PAL, SECAM, NTSC 3.58/4.43 [EXT only]	
Stereo System	NICAM (B/G, I, D/K, L), A2 (B/G, D/K)	
Teletext System	FLOF (Fastext level 2.5), TOP, WST(World Standard system)	
Receiving Frequency	VHF: 47MHz - 470MHz UHF: 470MHz - 862MHz	
Intermediate Frequency	VIF	38.9MHz (B/G, I, D/K, L)
	SIF	33.4MHz (5.5MHz :B/G) 32.9MHz (6.0MHz :I) 32.4MHz (6.5MHz :D/K)
Colour Sub Carrier Frequency	PAL	4.43MHz
	SECAM	4.40625MHz / 4.25MHz
	NTSC	3.58MHz / 4.43MHz
LCD panel	26V-inch wide aspect (16 : 9)	32V-inch wide aspect (16 : 9)
Screen Size	Diagonal : 66 cm (H: 57.6 cm × V: 32.4 cm)	Diagonal : 80 cm (H: 69.7 cm × V: 39.2 cm)
Display Pixels	Horizontal : 1366 dots × Vertical : 768 dots (W-XGA)	
Audio Power Output	5 W + 5 W	
Speaker	6.6 cm, round type × 2 (Oblique corn)	
Aerial terminal (VHF/UHF)	75 Ω unbalanced, coaxial	
EXT-1 / EXT-2 (Input / Output)	21-pin Euro connector (SCART socket ) × 2	
EXT-3 (Input)	S-Video	Mini-DIN 4 pin × 1 Y: 1 V (p-p), Positive (Negative sync provided), 75 Ω C: 0.286 V (p-p) (Burst signal), 75 Ω
	Video	1 V (p-p), Positive (Negative sync provided), 75 Ω, RCA pin jack × 1
	Audio	500 mV (rms), High impedance, RCA pin jack × 2
EXT-4 (Input)	Component Video	RCA pin jack × 3 Y : 1 V (p-p) (Sync signal: ±0.35V(p-p), 3-value sync.), 75Ω Pb/Pr : ±0.35V(p-p), 75 Ω
	1125i/750p	Y : 1 V (p-p), Positive (Negative sync provided), 75 Ω Cb/Cr : 0.7V(p-p), 75 Ω
	625p / 525p / 625i / 525i	
DIGITAL Input	DVI-D signal link 19pin connector × 1(Digital-input terminal is not compatible with computer signal)	
Headphone	3.5 mm stereo mini jack × 1	
Remote Control Unit	RM-C1816S (AA/R6 dry cell battery × 2)	

Design & specifications are subject to change without notice.

# SECTION 1

## PRECAUTION

### 1.1 SAFETY PRECAUTIONS [EXCEPT FOR UK]

- (1) The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
- (2) Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
- (3) Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (  $\Delta$  ) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
- (4) **Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**  
Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (  $\perp$  ) side GND, the ISOLATED (NEUTRAL) : (  $\equiv$  ) side GND and EARTH : (  $\oplus$  ) side GND.  
Don't short between the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND and never measure the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND at the same time with a measuring apparatus (oscilloscope etc.). If above note will not be kept, a fuse or any parts will be broken.
- (5) When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

#### (6) Isolation Check (Safety for Electrical Shock Hazard)

After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, video/audio input and output terminals, Control knobs, metal cabinet, screw heads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

##### a) Dielectric Strength Test


The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 3000V AC (r.m.s.) for a period of one second. (. . . Withstand a voltage of 1100V AC (r.m.s.) to an appliance rated up to 120V, and 3000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.) This method of test requires a test equipment not generally found in the service trade.

##### b) Leakage Current Check


Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.). However, in tropical area, this must not exceed 0.2mA AC (r.m.s.).

#### Alternate Check Method

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1000 $\Omega$  per volt or more sensitivity in the following manner. Connect a 1500 $\Omega$  10W resistor paralleled by a 0.15 $\mu$ F AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.). Measure the AC voltage across the resistor with the AC voltmeter. Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.). However, in tropical area, this must not exceed 0.3V AC (r.m.s.). This corresponds to 0.2mA AC (r.m.s.).

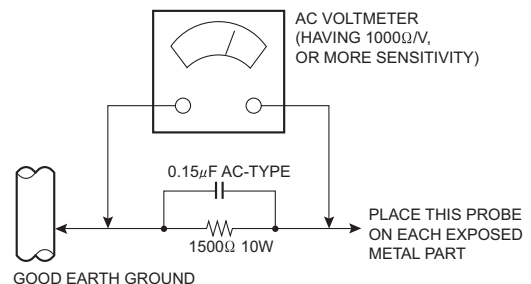

## 1.2 SAFETY PRECAUTIONS [FOR UK]

- (1) The design of this product contains special hardware and many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
- (2) Alterations of the design or circuitry of the product should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
- (3) Many electrical and mechanical parts in the product have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessary be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the Parts List of Service Manual. Electrical components having such features are identified by shading on the schematics and by (  ) on the Parts List in the Service Manual. The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the Parts List of Service Manual may cause shock, fire, or other hazards.
- (4) The leads in the products are routed and dressed with ties, clamps, tubing's, barriers and the like to be separated from live parts, high temperature parts, moving parts and / or sharp edges for the prevention of electric shock and fire hazard. When service is required, the original lead routing and dress should be observed, and it should be confirmed that they have been returned to normal, after re-assembling.


### WARNING

- (1) The equipment has been designed and manufactured to meet international safety standards.
- (2) It is the legal responsibility of the repairer to ensure that these safety standards are maintained.
- (3) Repairs must be made in accordance with the relevant safety standards.
- (4) It is essential that safety critical components are replaced by approved parts.
- (5) If mains voltage selector is provided, check setting for local voltage.

## 1.3 INSTALLATION


### 1.3.1 HEAT DISSIPATION

If the heat dissipation vent behind this unit is blocked, cooling efficiency may deteriorate and temperature inside the unit will rise. The temperature sensor that protects the unit will be activated when internal temperature exceeds the pre-determined level and power will be turned off automatically. Therefore, please make sure pay attention not to block the heat dissipation vent as well as the ventilation outlet behind the unit and ensure that there is room for ventilation around it.

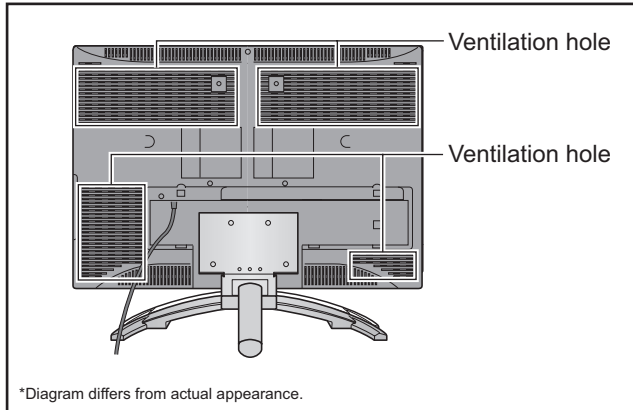


### 1.3.2 INSTALLATION REQUIREMENTS

Ensure that the minimal distance is maintained, as specified below, between the unit with and the surrounding walls, as well as the floor etc. Install the unit on stable flooring or stands. Take precautionary measures to prevent the unit from tipping in order to protect against accidents and earthquakes.

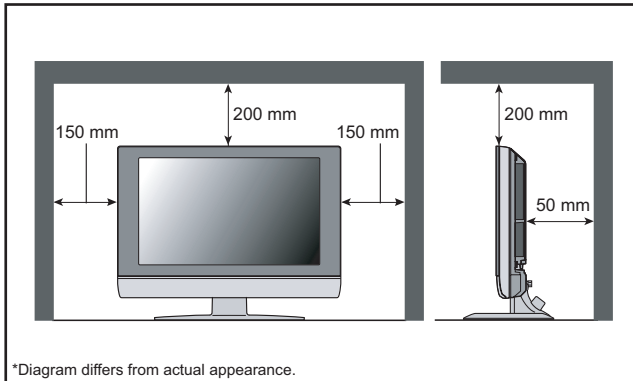

### 1.3.3 INSTALLATION REQUIREMENTS

To ensure safety in an emergency such as an earthquake, and to prevent accidents, ensure that measures are taken to prevent the TV dropping or falling over.

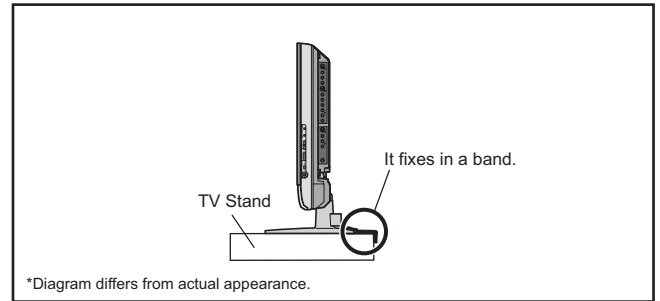

### 1.3.4 NOTES ON HANDLING

#### (1) WHEN TAKING UNIT OUT OF A PACKING CASE

When taking the unit out of a packing case, do not grasp the upper part of the unit. If you take the unit out while grasping the upper part, the LCD PANEL may be damaged because of a pressure. Instead of grasping the upper part, put your hands on the lower backside or sides of the unit.

#### (2) AS FOR PRESSING OR TOUCHING A SPEAKER

Be careful not to press the opening of the speaker in the lower part of the unit and around them since the decorative sheet on the surface of the openings may be deformed.

## **1.4 HANDLING LCD PANEL**

### **1.4.1 PRECAUTIONS FOR TRANSPORTATION**

When transporting the unit, pressure exerted on the internal LCD panel due to improper handling (such as tossing and dropping) may cause damages even when the unit is carefully packed. To prevent accidents from occurring during transportation, pay careful attention before delivery, such as through explaining the handling instructions to transporters.

Ensure that the following requirements are met during transportation, as the LCD panel of this unit is made of glass and therefore fragile:

- (1) **USE A SPECIAL PACKING CASE FOR THE LCD PANEL**  
When transporting the LCD panel of the unit, use a special packing case (packing materials). A special packing case is used when a LCD panel is supplied as a service spare part.
- (2) **ATTACH PROTECTION SHEET TO THE FRONT**  
Since the front (display part) of the panel is vulnerable, attach the protection sheet to the front of the LCD panel before transportation. Protection sheet is used when a LCD panel is supplied as a service spare part.
- (3) **AVOID VIBRATIONS AND IMPACTS**  
The unit may be broken if it is toppled sideways even when properly packed. Continuous vibration may shift the gap of the panel, and the unit may not be able to display images properly. Ensure that the unit is carried by at least 2 persons and pay careful attention not to exert any vibration or impact on it.
- (4) **DO NOT PLACE EQUIPMENT HORIZONTALLY**  
Ensure that it is placed upright and not horizontally during transportation and storage as the LCD panel is very vulnerable to lateral impacts and may break. During transportation, ensure that the unit is loaded along the traveling direction of the vehicle, and avoid stacking them on one another. For storage, ensure that they are stacked in 2 layers or less even when placed upright.

### **1.4.2 OPTICAL FILTER (ON THE FRONT OF THE LCD PANEL)**

- (1) Avoid placing the unit under direct sunlight over a prolonged period of time. This may cause the optical filter to deteriorate in quality and COLOUR.
- (2) Clean the filter surface by wiping it softly and lightly with a soft and lightly fuzz cloth (such as outing flannel).
- (3) Do not use solvents such as benzene or thinner to wipe the filter surface. This may cause the filter to deteriorate in quality or the coating on the surface to come off. When cleaning the filter, usually use the neutral detergent diluted with water. When cleaning the dirty filter, use water-diluted ethanol.
- (4) Since the filter surface is fragile, do not scratch or hit it with hard materials. Be careful enough not to touch the front surface, especially when taking the unit out of the packing case or during transportation.

### **1.4.3 PRECAUTIONS FOR REPLACEMENT OF EXTERIOR PARTS**

Take note of the following when replacing exterior parts (REAR COVER, FRONT PANEL, etc.):

- (1) Do not exert pressure on the front of the LCD panel (filter surface). It may cause irregular COLOUR.
- (2) Pay careful attention not to scratch or stain the front of the LCD panel (filter surface) with hands.
- (3) When replacing exterior parts, the front (LCD panel) should be placed facing downward. Place a mat, etc. underneath to avoid causing scratches to the front (filter surface).

## SECTION 2

### SPECIFIC SERVICE INSTRUCTIONS

#### 2.1 FEATURES

##### T-V LINK

When you have a T-V LINK compatible VCR connected to the EXT-2 Terminal on the TV, it is easier to set up the VCR and to view videos.

##### PICTURE MODE

This function can adjust the picture settings automatically.

##### ZOOM

This function can change the screen size according to the picture aspect ratio.

##### DIGITAL VNR

This function cuts down the amount of noise in the original picture.

#### 2.2 MAIN DIFFERENCE LIST


Item	LT-26A61BJ	LT-26A61BU	LT-26A61BU/C	LT-26A61SJ	LT-26A61SU	LT-26A61SU/C
PAINT COLOUR	BLACK	BLACK	BLACK	SILVER	SILVER	SILVER
LCD PANEL UNIT	QLD0408-001-JUK	←	QLD0370-002-JUK	←	←	QLD0408-001-JUK
MAIN PWB	QAL0823-001	←	QAL0822-001	←	←	QAL0823-001

Item	LT-32A61BJ	LT-32A61BU	LT-32A61BU/C	LT-32A61SJ	LT-32A61SU	LT-32A61SU/C
PAINT COLOUR	BLACK	BLACK	BLACK	SILVER	SILVER	SILVER
LCD PANEL UNIT	QLD0409-001-JUK	←	QLD0371-001-JUK	←	←	QLD0409-001-JUK
MAIN PWB	QAL0825-001	←	QAL0824-001	←	←	QAL0825-001

#### 2.3 21-PIN EURO CONNECTOR (SCART) : EXT-1 / EXT-2

Pin No.	Signal designation	Matching value	EXT-1	EXT-2
1	AUDIO R output	500mV(rms) (Nominal), Low impedance	Used (TV OUT)	Used (LINE OUT)
2	AUDIO R input	500mV(rms) (Nominal), High impedance	Used (R1)	Used (R2)
3	AUDIO L output	500mV(rms) (Nominal), Low impedance	Used (TV OUT)	Used (LINE OUT)
4	AUDIO GND		Used	Used
5	GND (B)		Used	Used
6	AUDIO L input	500mV(rms) (Nominal), High impedance	Used (L1)	Used (L2)
7	B input	700mV <sub>(B-W)</sub> , 75Ω	Used	Used
8	FUNCTION SW (SLOW SW)	Low : 0V-3V High : 8V-12V, High impedance	Used	Used
9	GND (G)		Used	Used
10	SCL / T-V LINK		Not used	Used (SCL2 / TV-LINK)
11	G input	700mV <sub>(B-W)</sub> , 75Ω	Used	Used
12	SDA		Not used	Used (SDA2)
13	GND (R)		Used	Used
14	GND (YS)		Used	Not used
15	R / C input	R : 700mV <sub>(B-W)</sub> , 75Ω C : 300mV <sub>(P-P)</sub> , 75Ω	Used (R)	Used (C2/R)
16	Ys input (FAST SW)	Low : 0V-0.4V, High : 1V-3V, 75Ω	Used	Used
17	GND (VIDEO output)		Used	Used
18	GND (VIDEO input)		Used	Used
19	VIDEO output	1V <sub>(P-P)</sub> (Negative sync), 75Ω	Used (TV OUT)	Used (LINE OUT)
20	VIDEO / Y input	1V <sub>(P-P)</sub> (Negative sync), 75Ω	Used	Used
21	COMMON GND		Used	Used


(P-P= Peak to Peak, B-W= Blanking to white peak)

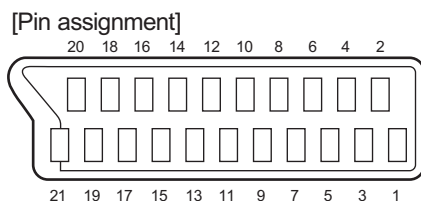

## 2.4 HOW TO IDENTIFY MODELS

BJ, BU, SJ and SU models : "AE" is added to the serial No. after at the Rating label.

BU/C and SU/C models : "CE" is added to the serial No. after at the Rating label.

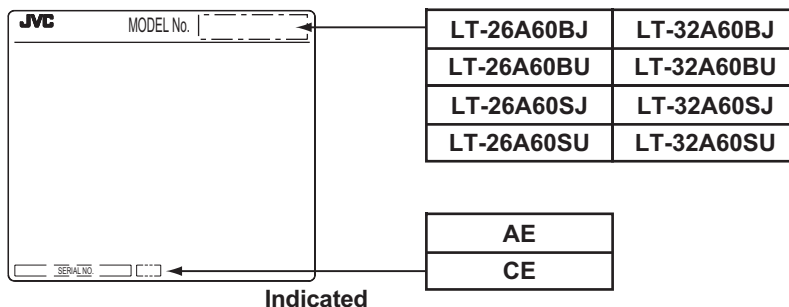

## 2.5 TECHNICAL INFORMATION

### 2.5.1 LCD PANEL

This unit uses the flat type panel LCD (Liquid Crystal Display) panel that occupies as little space as possible, instead of the conventional CRT (Cathode Ray Tube), as a display unit.

Since the unit has the two polarizing filter that are at right angles to each other, the unit adopts "normally black" mode, where light does not pass through the polarizing filter and the screen is black when no voltage is applied to the liquid crystals.

#### 2.5.1.1 SPECIFICATIONS

The following table shows the specifications of this unit.

Item	Specifications			
	26V-TYPE LCD PANEL UNIT		32V-TYPE LCD PANEL UNIT	
	QLD0370-002-JUK	QLD0408-001-JUK	QLD0371-001-JUK	QLD0409-001-JUK
Maximum dimensions ( W×H×D )	626 mm × 373 mm × 52 mm	626 mm × 373 mm × 47.5 mm	760 mm × 450 mm × 50 mm	760 mm × 450 mm × 45 mm
Weight	4.7 kg	4.2 kg	7.0 kg	7.2 kg
Effective screen size	Diagonal: 660 mm (H: 576 mm × V: 324 mm)		Diagonal: 800 mm (H: 697 mm × V: 392 mm)	
Aspect ratio	16 : 9			
Drive device / system	a-Si-TFT active matrix system			
Resolution	Horizontally 1366 × Vertically 768 × RGB < W-XGA > 3147264 dots in total			
Pixel pitch (pixel size)	Horizontally: 0.4215 mm, Vertically: 0.4215mm		Horizontally: 0.51075 mm, Vertically: 0.51075mm	
Displayed colour	16777216 colours 256 colours for R G and B			
Brightness	500cd/m2			
Contrast ratio	1000 : 1	800 : 1	1000 : 1	800 : 1
Response time	less than 22 ms	less than 35 ms	less than 22 ms	less than 20 ms
View angle (Horizontally)	178°	170°		
View angle (Vertically)	178°	170°		
Surface polarizer	Anti-Glare type Low reflective coat			
Colour filter	Vertical stripe			
Backlight	U-type Cold cathode fluorescent lamp × 8		Direct-type Cold cathode fluorescent lamp ×16	
Power supply voltage in LCD	6.5 V	5 V	6.5 V	5 V
Power supply voltage in inverter	24 V			
Panel interface system	LVDS (Low Voltage Differential Signaling)			

#### 2.5.1.2 PIXEL FAULT

There are three pixel faults - bright fault , dark fault and flicker fault - that are respectively defined as follows.

##### ■ BRIGHT FAULT

In this pixel fault, a cell that should not light originally is lighting on and off.

For checking this pixel fault, input ALL BLACK SCREEN and find out the cell that is lighting on and off.

##### ■ DARK FAULT

In this pixel fault, a cell that should light originally is not lighting or lighting with the brightness twice as brighter as originally lighting.

For checking this pixel fault, input 100% of each R/G/B colour and find out the cell that is not lighting.

##### ■ FLICKER FAULT

In the pixel fault, a cell that should light originally or not light originally is flashing on and off.

For checking this pixel fault, input ALL BLACK SCREEN signal or 100% of each RGB colour and find out the cell that is flashing on and off.



## 2.5.2 MAIN CPU PIN FUNCTION [U302 : MAIN PWB]

Pin	Pin name	I/O	Function	Pin	Pin name	I/O	Function
1	D1	I/O	Program ROM data for CPU	51	NC2	-	Not used
2	D4	I/O	Program ROM data for CPU	52	XTAL2	O	6MHz for system clock
3	D2	I/O	Program ROM data for CPU	53	XTAL1	I	6MHz for system clock
4	D3	I/O	Program ROM data for CPU	54	NC3	-	Not used
5	XROM	O	This pin must be pulled low to access external ROM.	55	VSSA	-	GND
6	VDD 2.5	I	2.5V	56	VDDA 2.5	I	2.5V
7	VSS	-	GND	57	R	O	R for teletext
8	VDD 3.5	I	3.5V	58	G	O	G for teletext
9	P0.0	I/O	Address/Data for scaler IC	59	B	O	B for teletext
10	P0.1	I/O	Address/Data for scaler IC	60	BLANK/COR	O	Ys for Teletext
11	P0.2	I/O	Address/Data for scaler IC	61	NC4	-	Not used
12	P0.3	I/O	Address/Data for scaler IC	62	P1.7	O	Reset for Scaler IC [H=Reset]
13	P0.4	-	Not used	63	NC5	-	Not used
14	P0.5	O	Address latch Enable	64	WR	O	Write for memory
15	P0.6	-	Not used	65	RD	O	Read for memory
16	P0.7	-	Not used	66	NC6		Not used
17	ENE	-	Not used	67	A19	O	Program ROM address for CPU
18	STOP	-	Not used	68	A18	O	Program ROM address for CPU
19	OCF	-	Not used	69	A16	O	Program ROM address for CPU
20	EXTIF	-	Not used	70	A17	O	Program ROM address for CPU
21	CVBS	I	Video for teletext	71	A15	O	Program ROM address for CPU
22	VDDA 2.5	I	2.5V	72	FL_PGM	-	Test purpose
23	VSSA	-	GND	73	VDD 2.5	I	2.5V
24	P2.0	I	Scart2 ID [H=Detect]	74	VSS	-	GND
25	P2.1	I	key scan data 1	75	VDD 3.3	I	3.3V
26	P2.2	I	key scan data 2	76	A14	O	Program ROM address for CPU
27	P2.3	I	Scaet1 ID [H=Detect]	77	A12	O	Program ROM address for CPU
28	NC1	-	Not used	78	A13	O	Program ROM address for CPU
29	HS/SSC	I	Horizontal sync	79	A7	O	Program ROM address for CPU
30	VS	I	Vertical sync	80	FL_RST	-	Test purpose
31	P3.0	O	Data Read for Scaler IC	81	A8	O	Program ROM address for CPU
32	P3.1	O	Comunication for adjustment [H=TXD]	82	A6	O	Program ROM address for CPU
33	P3.2	I	TV-Link in	83	A9	O	Program ROM address for CPU
34	P3.3	I	Remote control	84	A5	O	Program ROM address for CPU
35	P3.4	I/O	I2C bus Data(for EEPROM)	85	A11	O	Program ROM address for CPU
36	P3.5	O	I2C bus Clock(for EEPROM)	86	A4	O	Program ROM address for CPU
37	P3.6	O	Data Write for Scaler IC	87	ALE	O	Address Latch Enable
38	P3.7	I	Comunication for adjustment [H=RXD]	88	PSEN	O	Program Store Enable
39	VSS	-	GND	89	A3	O	Program ROM address for CPU
40	VDD 3.3	I	3.3V	90	A10	O	Program ROM address for CPU
41	P1.0	O	RGB Select [L=SCART1, H=SCART2]	91	VSS	-	GND
42	P1.1	I	Headphone Ident [L=Detect]	92	VDD 3.3	I	3.3V
43	P1.2	I/O	I2C bus Data(for inter IC)	93	A2	O	Program ROM address for CPU
44	P1.3	O	I2C bus Clock(for inter IC)	94	A1	O	Program ROM address for CPU
45	P1.4	O	Reset for inter IC [L=Reset]	95	FL_CE	-	Test purpose
46	P1.5	I	PC Detect [L=Detect]	96	D7	I/O	Program ROM data for CPU
47	P1.6	O	Memory Pack I2C S/W [L=Detect]	97	A0	O	Program ROM address for CPU
48	P4.2	O	Main power control [L=ON, H=OFF]	98	D6	I/O	Program ROM data for CPU
49	P4.3	O	TV-Link out	99	D0	I/O	Program ROM data for CPU
50	RST	O	Reset [L=Reset]	100	D5	I/O	Program ROM data for CPU

## SECTION 3

### DISASSEMBLY

#### 3.1 DISASSEMBLY PROCEDURE

##### CAUTION AT DISASSEMBLY:

- Make sure that the power cord is disconnected from the outlet.
- Pay special attention not to break or damage the parts.
- When removing each board, remove the connectors as required. Taking notes of the connecting points (connector numbers) makes service procedure manageable.
- Make sure that there is no bent or stain on the connectors before inserting, and firmly insert the connectors.

##### 3.1.1 REMOVING THE STAND

- (1) Remove the JACK COVER.
- (2) Remove the STAND COVER by sliding it in the direction of an arrow.
- (3) Remove the 2 screws [A], then remove the STAND COVER.
- (4) Remove the 2 screws [B] and 2 screws [C], then remove the STAND.

##### 3.1.2 REMOVING THE REAR COVER

- Remove the STAND.
  - (1) Remove the 8 screws [D], 1 screw [E] and 2 screws [F], then remove the REAR COVER.

##### 3.1.3 REMOVING THE POWER PWB

- Remove the STAND.
- Remove the REAR COVER.
  - (1) Remove the 4 screws [G] and 1 screw [H], then remove the TERMINAL BASE.
  - (2) Remove the 8 screws [J], then remove the BACK BRACKET.
  - (3) Remove the 6 screws [K], then remove the POWER PWB SHIELD.
  - (4) Remove the 5 screws [L], then remove the POWER PWB.

##### 3.1.4 REMOVING THE MAIN PWB

- Remove the STAND.
- Remove the REAR COVER.
- Remove the TERMINAL BASE.
- Remove the BACK BRACKET.
- Remove the POWER PWB SHIELD.
  - (1) Remove the 7 screws [M] and 2 screws [N], then remove the MAIN PWB SHIELD.
  - (2) Remove the 6 screws [P], then remove the MAIN PWB.

##### 3.1.5 REMOVING THE KEY PWB

- Remove the STAND.
- Remove the REAR COVER.
  - (1) Remove the 2 screws [Q], then remove the KEY PWB.

##### 3.1.6 REMOVING THE LED PWB

- Remove the STAND.
- Remove the REAR COVER.
  - (1) Remove the 2 screws [R], then remove the LED PWB.

##### 3.1.7 REMOVING THE SPEAKER

- Remove the STAND.
- Remove the REAR COVER.
  - (1) Remove the 6 screws [S], then remove the SPEAKER (L/R).

##### CAUTION:

Please do not disassembly the SPEAKER.  
When the speaker is decomposed, the performance cannot be kept.

##### 3.1.8 REMOVING THE LCD PANEL UNIT

- Remove the STAND.
- Remove the REAR COVER.
- Remove the TERMINAL BASE.
- Remove the BACK BRACKET.
  - (1) Remove the 6 screws [T], then remove the MAIN BASE.
  - (2) Remove the 6 screws [U], then remove the FRONT PANEL.
  - (3) Remove the 2 screws [V], then remove the TOP FRAME.
  - (4) Remove the 2 screws [W], then remove the BOTTOM FRAME.

##### NOTE:

- Pay special attention not to break or damage on the FRONT PANEL.
- The LCD PANEL UNIT is fixed to the FRONT PAMEL (at the back side)by using double-side adhesive tapes. To remove the LCD PANEL UNIT, remove the adhesive tape on the FRONT PANEL slowly.

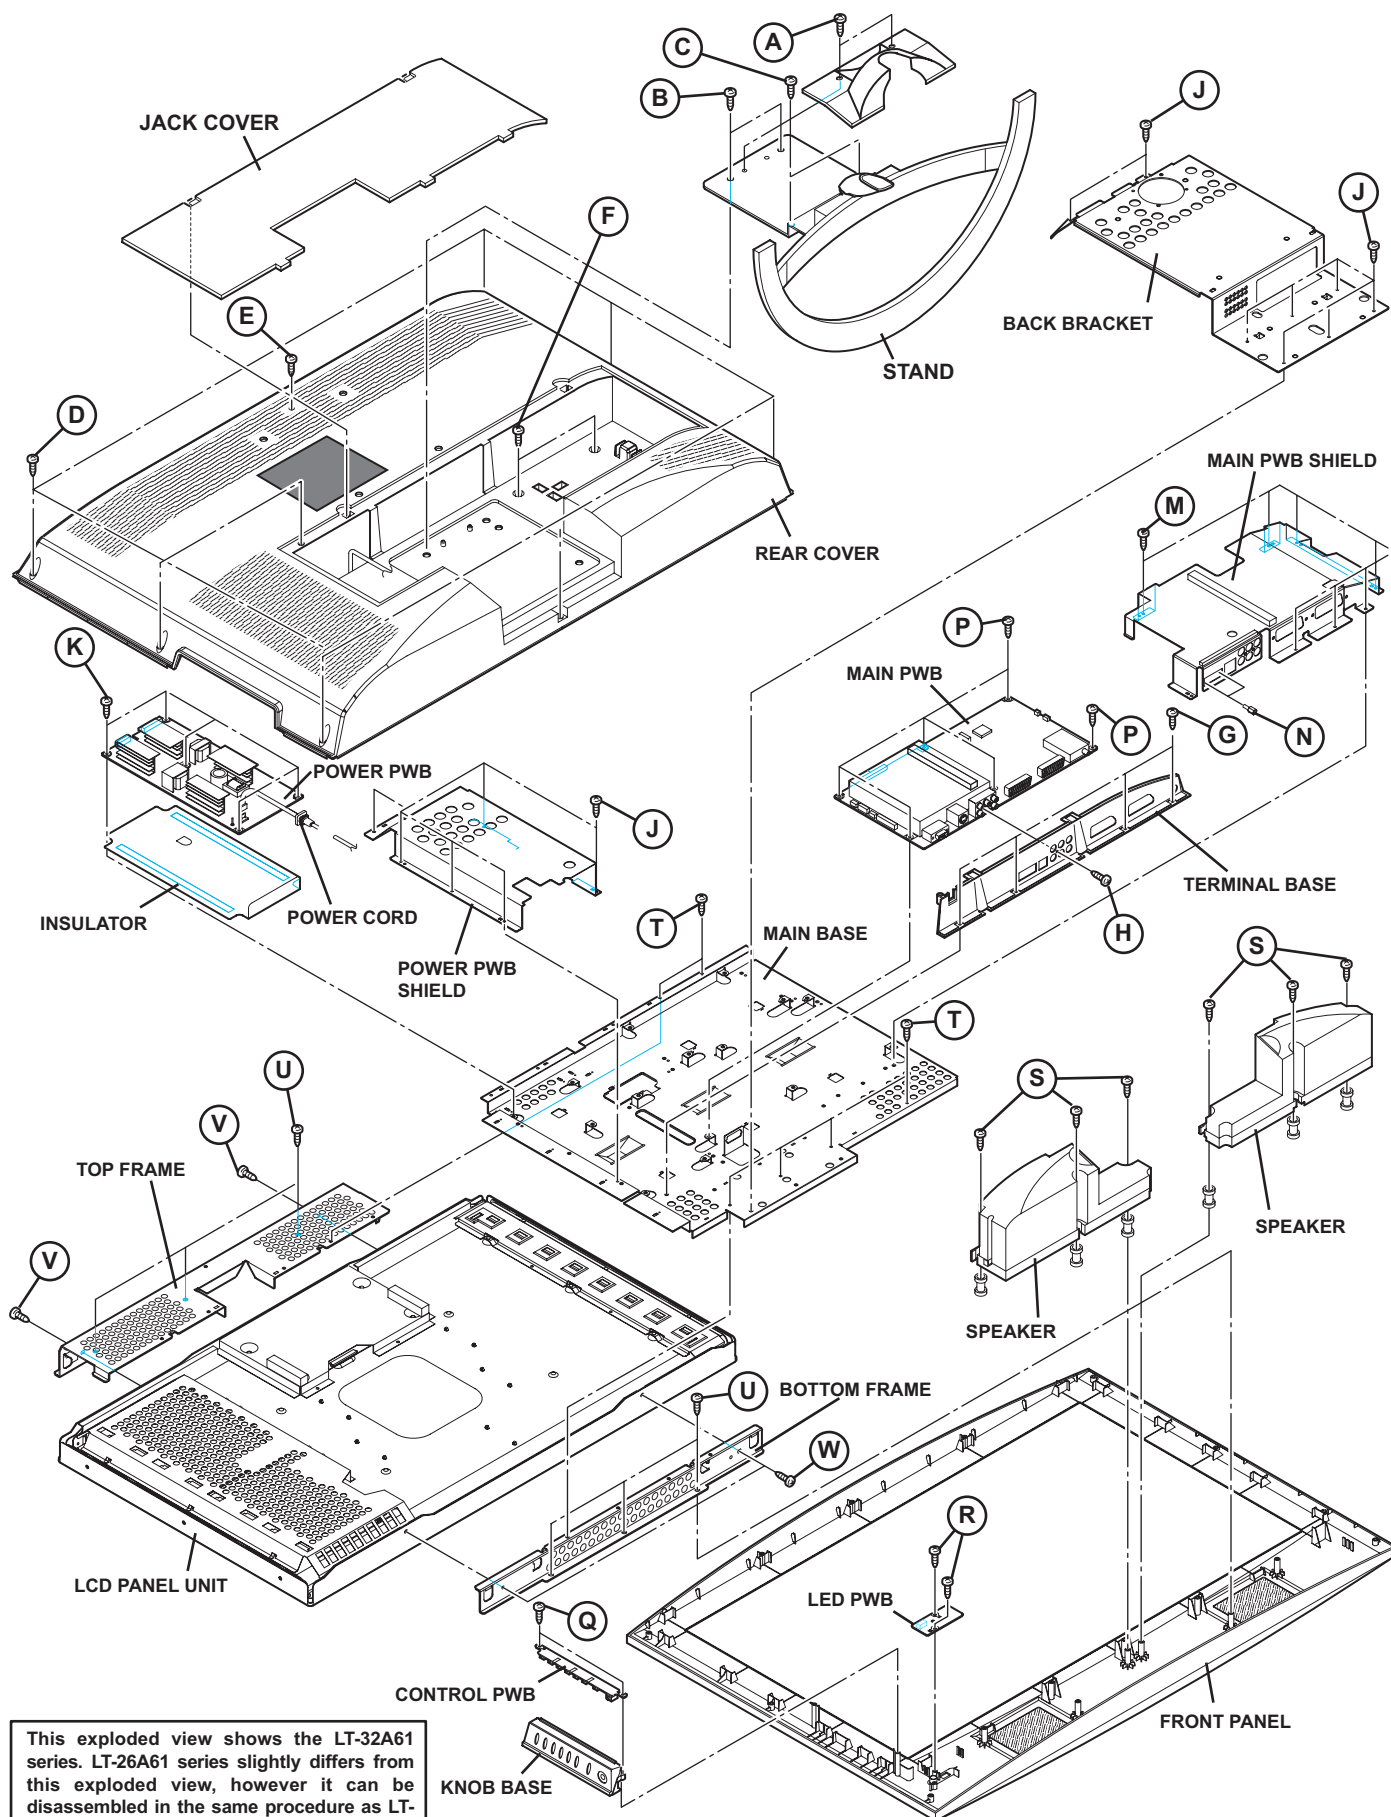


Fig.1

3.2 MEMORY IC REPLACEMENT

- This model uses the memory IC.
- This memory IC stores data for proper operation of the video and drive circuits.
- When replacing, be sure to use an IC containing this (initial value) data.

3.2.1 MEMORY IC REPLACEMENT PROCEDURE

1. Power off

Switch off the power and disconnect the power plug from the AC outlet.

2. Replace the memory IC

Be sure to use the memory IC written with the initial setting values.

3. Power on

Connect the power plug to the AC outlet and switch on the power.

4. Receiving channel setting

Refer to the OPERATING INSTRUCTIONS and set the receive channels (Channels Preset) as described.

5. User setting

Check the user setting items according to the given in page later. Where these do not agree, refer to the OPERATING INSTRUCTIONS and set the items as described.

6. SERVICE MODE setting

Verify what to set in the SERVICE MODE, and set whatever is necessary (Fig.1). Refer to the SERVICE ADJUSTMENT for setting.

3.2.2 SERVICE MODE SETTING

■SERVICE MODE SCREEN

NOTE:

As self check feature is not used in this TV, "2.SELF\_CHECK" cannot be selected (screen display only).

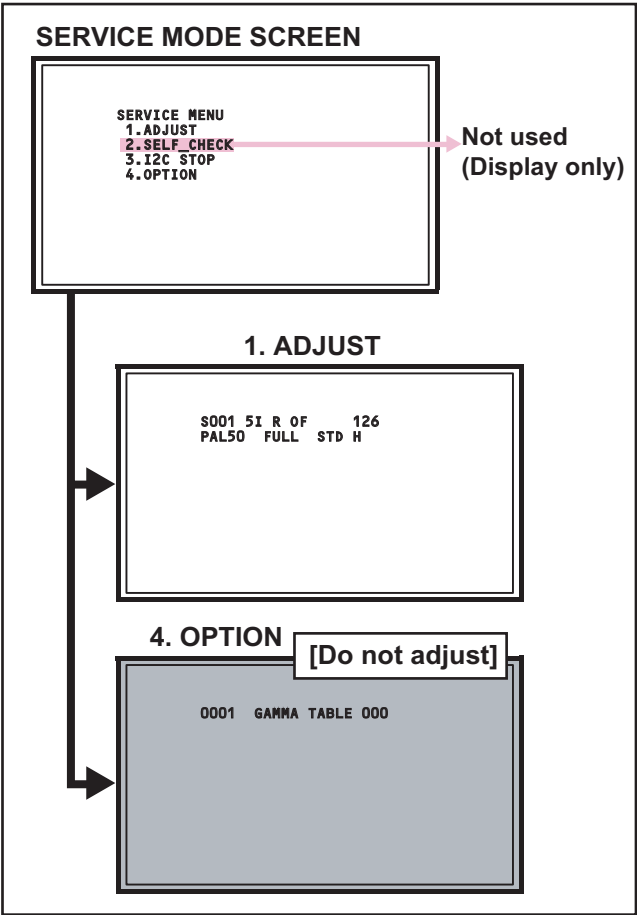


Fig.1

■SETTING ITEM

Setting items	Setting items	Settings	Item No.
1.ADJUST	Video system setting -1	Adjust	S001 - S043
	Video system setting -2	Fixed	M001 - M009
	Audio System Setting	Fixed	A001 - A003
	Video system setting -3	Fixed	D001 - D051
	Video system setting -4	Fixed	SD01 - SD15
	Video system setting -5	Fixed	DD07 - DD31
1.OPTION	Option Setting	Fixed	0001 - 0004

### 3.2.3 SETTINGS OF FACTORY SHIPMENT

#### 3.2.3.1 BUTTON OPERATION

Setting item	Setting position
POWER	Off
CHANNEL	PR1
VOLUME	10
TV/AV	TV

#### 3.2.3.3 REMOTE CONTROL MENU OPERATION

##### (1) PICTURE

Setting item	Setting position
PICTURE MODE	BRIGHT
COLOUR TEMP.	COOL
<b>FEATURES</b>	
DIGITAL VNR	AUTO (LOW)
COLOUR SYSTEM	TV Depends on PR/CH
	EXT AUTO
4:3 AUTO ASPECT	PANORAMIC

##### (2) SOUND

Setting item	Setting position
STEREO / I·II	Stereo sound
BASS	Centre
TREBLE	Centre
BALANCE	Centre
3D SOUND	OFF

#### 3.2.3.2 REMOTE CONTROL DIRECT OPERATION

Setting item	Setting position
CHANNEL	PR1
VOLUME	10
ZOOM	PANORAMIC
3D SOUND	OFF

##### (4) FEATURES

Setting item	Setting position
SLEEP TIMER	OFF
CHILD LOCK	ID NO.0000, All CH off
APPEARANCE	TYPE D
BLUE BACK	ON
FAVOURITE SETTING	Reset

##### (5) SET UP

Setting item	Setting position
AUTO PROGRAM	TV channel automatically set
EDIT/MANUAL	PRESET CH only
LANGUAGE	ENGLISH
DECODER (EXT-2)	OFF
<b>EXT SETTING</b>	
S-IN	BLANK
ID	BLANK
DUBBING	EXT-1 → EXT-2

### 3.3 REPLACEMENT OF CHIP COMPONENT

#### 3.3.1 CAUTIONS

- (1) Avoid heating for more than 3 seconds.
- (2) Do not rub the electrodes and the resist parts of the pattern.
- (3) When removing a chip part, melt the solder adequately.
- (4) Do not reuse a chip part after removing it.

#### 3.3.2 SOLDERING IRON


- (1) Use a high insulation soldering iron with a thin pointed end of it.
- (2) A 30w soldering iron is recommended for easily removing parts.

#### 3.3.3 REPLACEMENT STEPS


##### 1. How to remove Chip parts

[Resistors, capacitors, etc.]

- (1) As shown in the figure, push the part with tweezers and alternately melt the solder at each end.



- (2) Shift with the tweezers and remove the chip part.




[Transistors, diodes, variable resistors, etc.]

- (1) Apply extra solder to each lead.



- (2) As shown in the figure, push the part with tweezers and alternately melt the solder at each lead. Shift and remove the chip part.




#### NOTE :

After removing the part, remove remaining solder from the pattern.


##### 2. How to install Chip parts

[Resistors, capacitors, etc.]

- (1) Apply solder to the pattern as indicated in the figure.




- (2) Grasp the chip part with tweezers and place it on the solder. Then heat and melt the solder at both ends of the chip part.




[Transistors, diodes, variable resistors, etc.]

- (1) Apply solder to the pattern as indicated in the figure.
- (2) Grasp the chip part with tweezers and place it on the solder.
- (3) First solder lead **A** as indicated in the figure.



- (4) Then solder leads **B** and **C**.



## SECTION 4 ADJUSTMENT

### 4.1 ADJUSTMENT PREPARATION

- (1) The adjustment using the **REMOTE CONTROL UNIT** is made on the basis of the **initial setting values**. The setting values which adjust the screen to the optimum condition can be different from the initial setting values.
- (2) Make sure that connection is correctly made AC to AC power source.
- (3) Turn on the power of the TV and measuring instruments for warming up for at least 30 minutes before starting adjustments.
- (4) If the receive or input signal is not specified, use the most appropriate signal for adjustment.
- (5) Never touch the parts (such as variable resistors, transformers and condensers) not shown in the adjustment items of this service adjustment.

### 4.5 BASIC OPERATION OF SERVICE MODE

#### 4.5.1 HOW TO ENTER THE SERVICE MODE

- (1) Press **[INFORMATION]** key and **[MUTING]** key on the remote control unit simultaneously to enter the SERVICE MODE SCREEN. (Fig.1)

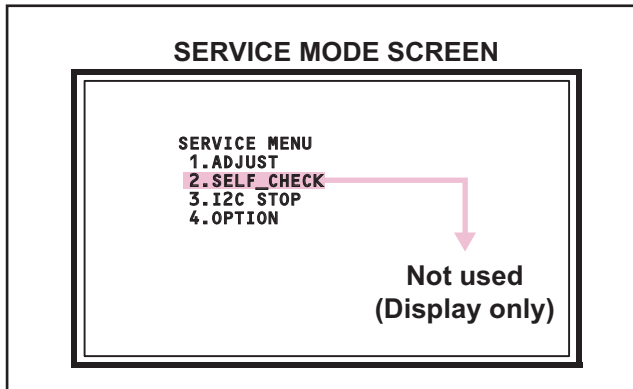


Fig.1

#### NOTE:

- As self check feature is not used in this TV, "2.SELF\_CHECK" cannot be selected (screen display only).
- Before entering the SERVICE MODE, confirm that the setting of VCR/TV/DVD switch is at the "TV" side. If the switches have not been properly set, you cannot enter the SERVICE MODE.

#### 4.5.2 HOW TO EXIT THE SERVICE MODE

Press the **[MENU]** key to exit the Service mode.

### 4.2 PRESET SETTING BEFORE ADJUSTMENTS

Unless otherwise specified in the adjustment items, preset the following functions with the REMOTE CONTROL UNIT.

Setting item	Settings position
PICTURE MODE	STANDARD
PICTURE adjustments	Centre
COLOUR TEMP.	NORMAL

### 4.3 MEASURING INSTRUMENT AND FIXTURES

- Signal generator (Pattern generator)[PAL]
- Remote control unit

### 4.4 ADJUSTMENT ITEMS

#### 4.5.3 CHANGE AND MEMORY OF SETTING VALUE

##### SELECTION OF SETTING ITEM

- **[FUNCTION ▲/▼]** key.  
For scrolling up / down the setting items.


##### CHANGE OF SETTING VALUE (DATA)

- **[FUNCTION ◀/▶]** key.  
For scrolling up / down the setting values.

##### MEMORY OF SETTING VALUE (DATA)

Changed setting value is memorized by pressing **[MUTING]** key.

#### 4.5.4 SERVICE MODE SELECT KEY LOCATION

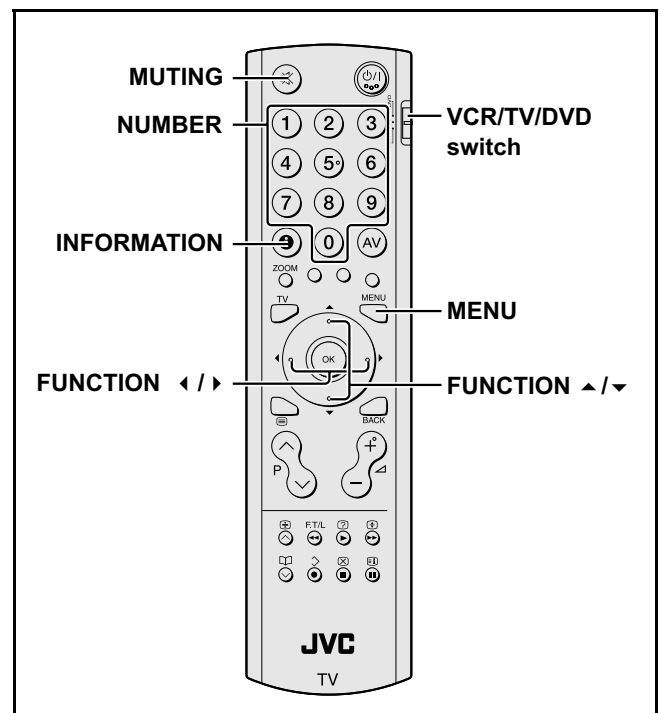

#### 4.5.5 ADJUSTMENT MODE

This mode is used to adjust the VIDEO CIRCUIT.


##### 4.5.5.1 HOW TO ENTER THE ADJUSTMENT MODE

When the SERVICE MENU SCREEN of SERVICE MODE is displayed, press **[1]** key to enter the ADJUSTMENT MODE (Fig.2).

##### NOTE:

- When a number key other than the **[1]** key is pressed in the SERVICE MODE SCREEN, the other relevant screen may be displayed.  
This is not used in the adjustment procedure. Press the **[MENU]** key to return to the SERVICE MODE SCREEN.

##### 4.5.5.2 DESCRIPTION OF STATUS DISPLAY

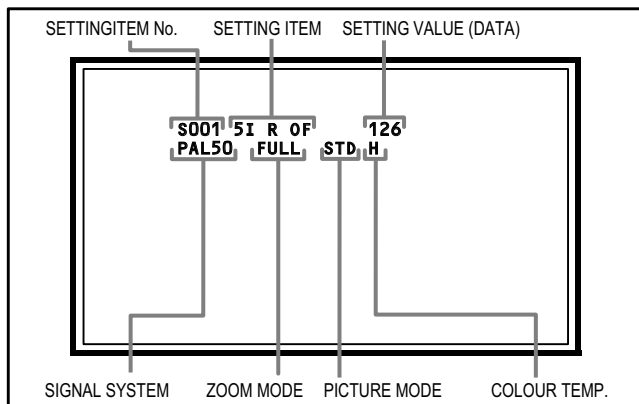

##### (1) SIGNAL SYSTEM

The signal displayed on the screen is displayed.

PAL50 : PAL50Hz (Composite / S-video)  
PAL60 : PAL60Hz (Composite / S-video)  
SECAM : SECAM  
NTSC3 : NTSC3.58  
NTSC4 : NTSC4.43  
525I : 525i (Component)  
525P : 525p  
625I : 625i (Component)  
625P : 625p  
750P6 : 750p 60Hz  
PCVGA : PC (VGA)  
PCXGA : PC (XGA)

##### (2) ZOOM MODE

State of the screen mode is displayed.

##### NOTE:

In ADJUSTMENT MODE, the screen mode can be set only to **"FULL"**. When it is entered to ADJUSTMENT MODE, it is automatically changed to **"FULL"**, even if the setting is in other screen mode.

##### (3) PICTURE MODE

State of the picture mode is displayed.

##### NOTE:

In ADJUSTMENT MODE, the picture mode can be set only to **"STANDARD"**. When it is entered to ADJUSTMENT MODE, it is automatically changed to **"STANDARD"**, even if the setting is in other picture mode.

#### (4) WHITE BALANCE

State of the colour temperature is displayed.

##### NOTE:

In ADJUSTMENT MODE, the colour temperature can be set only to **"NORMAL"**. When it is entered to ADJUSTMENT MODE, it is automatically changed to **"NORMAL"**, even if the setting is in other colour temperature.

#### (5) SETTING ITEM NAME

Setting item name are displayed. The setting item numbers to be displayed are listed below.

Item No.	Setting item
S001 - S043	Video system setting -1
M001 - M009	Video system setting -2
A001 - A003	Audio System Setting
D001 - D051	Video system setting -3
SD01 - SD15	Video system setting -4
DD07 - DD31	Video system setting -5

#### (6) SETTING ITEM NO.

Setting item numbers are displayed. For the setting item names to be displayed, refer to "INITIAL SETTING VALUES IN THE SERVICE MODE".


#### (7) SETTING VALUE (DATA)

The SETTING VALUE is displayed.

#### 4.5.6 OPTION MODE [Do not adjust]

Display of option data setting.

##### 4.5.6.1 DESCRIPTION OF STATUS DISPLAY

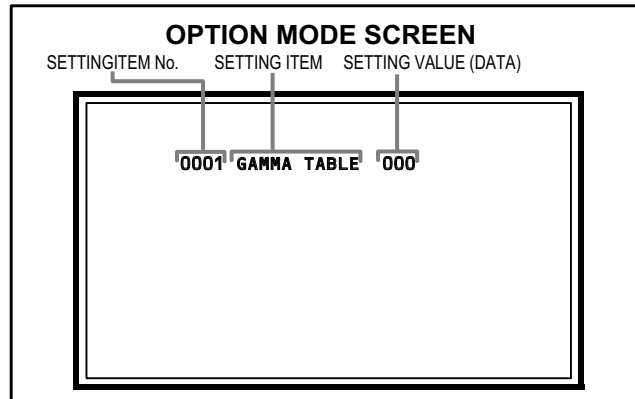

##### (1) SETTING ITEM NAME

Setting item name are displayed. The setting item numbers to be displayed are listed below.

Item No.	Setting item
0001 - 0004	option data setting <b>[Do not adjust]</b>

##### (2) SETTING ITEM NO.

Setting item numbers are displayed. For the setting item names to be displayed, refer to "INITIAL SETTING VALUES IN THE SERVICE MODE".

##### (3) SETTING VALUE (DATA)

The SETTING VALUE is displayed.



## 4.6 INITIAL SETTING VALUES IN THE SERVICE MODE

- Perform fine-tuning based on the "initial values" using the remote control when in the Service mode.
- The "initial values" serve only as an indication rough standard and therefore the values with which optimal display can be achieved may be different from the default values. But, don't change the values that are not written in "ADJUSTMENT PROCEDURE". They are fixed values.

### 4.6.1 ADJUSTMENT MODE

#### 4.6.1.1 VIDEO SYSTEM SETTING -1

Item No.	Item name	Variable range	Setting value
S001	5I R OF	000 - 255	127
S002	5I G OF	000 - 255	127
S003	5I B OF	000 - 255	126
S004	5P R OF	000 - 255	127
S005	5P G OF	000 - 255	127
S006	5P B OF	000 - 255	126
S007	HD75 R OF	000 - 255	127
S008	HD75 G OF	000 - 255	127
S009	HD75 B OF	000 - 255	126
S010	HD25 R OF	000 - 255	127
S011	HD25 G OF	000 - 255	127
S012	HD25 B OF	000 - 255	126
S013	R DRIVE	000 - 255	150
S014	G DRIVE	000 - 255	126
S015	B DRIVE	000 - 255	117
S016	HD R DR	-32 - 31	00
S017	HD G DR	-32 - 31	00
S018	HD B DR	-32 - 31	00
S019	CL R DR	-32 - 31	01
S020	CL G DR	-32 - 31	01
S021	CL B DR	-32 - 31	08
S022	WM R DR	-32 - 31	00
S023	WM G DR	-32 - 31	-7
S024	WM B DR	-32 - 31	-16
S025	HD CL R DR	-32 - 31	01
S026	HD CL G DR	-32 - 31	00
S027	HD CL B DR	-32 - 31	00
S028	HD WM R DR	-32 - 31	00
S029	HD WM G DR	-32 - 31	-2
S030	HD WM B DR	-32 - 31	-1
S031	PC R OF	000 - 255	115
S032	PC G OF	000 - 255	127
S033	PC B OF	000 - 255	127
S034	PC R DR	-32 - 31	-23
S035	PC G DR	-32 - 31	00
S036	PC B DR	-32 - 31	00
S037	PC CL R DR	-32 - 31	00
S038	PC CL G DR	-32 - 31	03
S039	PC CL B DR	-32 - 31	09
S040	PC WM R DR	-32 - 31	00
S041	PC WM G DR	-32 - 31	-6
S042	PC WM B DR	-32 - 31	-15
S043	PC AUTO WB	0 - 1	0

#### 4.6.1.2 VIDEO SYSTEM SETTING -2 (Fixed values)

Item No.	Item name	Variable range	Setting value
M001	MV CON	000 - 255	105
M002	MV SHA	00 - 63	09
M003	MV COL	000 - 255	147
M004	MV TIN	000 - 255	051
M005	AGC GAIN	000 - 255	120
M006	ERR Limit	000 - 127	022
M007	PC R GAIN	000 - 255	099
M008	PC G GAIN	000 - 255	099
M009	PC B GAIN	000 - 255	101

#### 4.6.1.3 AUDIO SYSTEM SETTING (Fixed values)

Item No.	Item name	Variable range	Setting value
A001	S BASS	00 - 16	8
A002	S TRE	00 - 16	8
A003	3D LEVEL	00 - 63	31

#### 4.6.1.4 VIDEO SYSTEM SETTING -3 (Fixed values)

Item No.	Item name	Variable range	Setting value
D001	S CON	00 - 63	20
D002	S BRI	00 - 63	47
D003	S SHA	00 - 15	0
D004	S COL	00 - 63	35
D005	S TIN	00 - 63	32
D006	RGB S COL	000 - 127	085
D007	5I S CON	00 - 63	25
D008	5I S BRI	00 - 63	35
D009	5I S SHA	00 - 63	46
D010	5I S COL	00 - 63	53
D011	5I S TIN	00 - 63	35
D012	5P S CON	00 - 63	24
D013	5P S BRI	00 - 63	35
D014	5P S SHA	00 - 63	18
D015	5P S COL	00 - 63	51
D016	5P S TIN	00 - 63	35
D017	HD75 S CON	00 - 63	29
D018	HD75 S BRI	00 - 63	32
D019	HD75 S SHA	00 - 63	30
D020	HD75 S COL	00 - 63	52
D021	HD75 S TIN	00 - 63	34
D022	HD25 S CON	00 - 63	29
D023	HD25 S BRI	00 - 63	32
D024	HD25 S SHA	00 - 63	30
D025	HD25 S COL	00 - 63	52
D026	HD25 S TIN	00 - 63	34

Item No.	Item name	Variable range	Setting value
D027	PC S CON	00 - 63	25
D028	PC S BRI	00 - 63	35
D029	TXT S CON	000 - 127	024
D030	TXT S BRI	000 - 127	016
D031	RGB S CON	000 - 127	040
D032	RGB S BRI	000 - 127	062
D033	STD BRI1	00 - 31	025
D034	STD CON	00 - 31	016
D035	STD BRI2	00 - 31	16
D036	STD SHA	00 - 31	16
D037	STD COL	00 - 31	16
D038	STD TIN	00 - 31	16
D039	SFT BRI1	00 - 31	16
D040	SFT CON	00 - 31	16
D041	SFT BRI2	00 - 31	16
D042	SFT SHA	00 - 31	16
D043	SFT COL	00 - 31	16
D044	SFT TIN	00 - 31	16
D045	BRI BRI1	00 - 31	31
D046	BRI CON	00 - 31	21
D047	BRI BRI2	00 - 31	14
D048	BRI SHA	00 - 31	21
D049	BRI COL	00 - 31	16
D050	BRI TIN	00 - 31	16
D051	PWM	00 - 31	5

#### 4.6.1.5 VIDEO SYSTEM SETTING -4 (Fixed values)

Item No.	Item name	Variable range	Setting value
SD01	5I R DR	00 - 63	30
SD02	5I G DR	00 - 63	26
SD03	5I B DR	00 - 63	30
SD04	5P R DR	00 - 63	30
SD05	5P G DR	00 - 63	26
SD06	5P B DR	00 - 63	30
SD07	HD75 R DR	00 - 63	30
SD08	HD75 G DR	00 - 63	26
SD09	HD75 B DR	00 - 63	30
SD10	HD25 R DR	00 - 63	30
SD11	HD25 G DR	00 - 63	26
SD12	HD25 B DR	00 - 63	30
SD13	PC R DR	00 - 63	5
SD14	PC G DR	00 - 63	5
SD15	PC B DR	00 - 63	5

#### 4.6.1.6 VIDEO SYSTEM SETTING -5 (Fixed values)

Item No.	Item name	Variable range	Setting value
DD07	5I S CON	00 - 63	31
DD08	5I S BRI	00 - 63	10
DD09	5I S SHA	00 - 63	35
DD10	5I S COL	00 - 63	52
DD11	5I S TIN	00 - 63	32
DD12	5P S CON	00 - 63	31
DD13	5P S BRI	00 - 63	10
DD14	5P S SHA	00 - 63	30
DD15	5P S COL	00 - 63	52
DD16	5P S TIN	00 - 63	32
DD17	HD75 S CON	00 - 63	31
DD18	HD75 S BRI	00 - 63	10
DD19	HD75 S SHA	00 - 63	45
DD20	HD75 S COL	00 - 63	52
DD21	HD75 S TIN	00 - 63	32
DD22	HD25 S CON	00 - 63	31
DD23	HD25 S BRI	00 - 63	10
DD24	HD25 S SHA	00 - 63	45
DD25	HD25 S COL	00 - 63	52
DD26	HD25 S TIN	00 - 63	32
DD27	PC S CON	00 - 63	35
DD28	PC S BRI	00 - 63	0
DD29	PC S SHA	00 - 63	40
DD30	PC S COL	00 - 63	52
DD31	PC S TIN	00 - 63	32

#### 4.6.2 OPTION MODE

#### 4.6.3 OPTION SETTING (Fixed values)

Item No.	Item name	Variable range	Setting value
0001	GAMMA TABLE	000 - 005	001
0002	DIMMING	000 - 002	000
0003	HPD SW	000 - 001	000
0004	HPD DELAY	000 - 255	010
0005	DVI MCLK	000 - 255	090

## 4.7 ADJUSTMENT PROCEDURE

### 4.7.1 VIDEO CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
WHITE BALANCE (HIGHLIGHT)	Remote control unit		[1.ADJUST] S013: R DRIVE (Red drive) S015: G DRIVE (Green drive) S017: B DRIVE (Blue drive)	(1) Receive a PAL 75% all white signal. (2) Set PICTURE MODE to " <b>STANDARD</b> ". (3) Set ZOOM to " <b>FULL</b> ". (4) Set COLOUR TEMP. to " <b>NORMAL</b> ". (5) Select " <b>1.ADJUST</b> " from the SERVICE MODE. (6) Set < <b>S013</b> > (R DRIVE), < <b>S015</b> > (G DRIVE) and < <b>S017</b> > (B DRIVE) to setting values of left table. (7) Adjust to Keep one of < <b>S030</b> > (Red drive), < <b>S031</b> > (Green drive) or < <b>S032</b> > (Blue drive) unchanged, then lower the other two so that the all-white screen is equally white throughout.  <b>NOTE:</b> Set one or more of < <b>S013</b> >, < <b>S015</b> >, and < <b>S017</b> > to setting values of left table. (8) Check that white balance is properly tracked from low light to high light. If the white balance tracking is deviated, adjust to correct it. (9) Press the <b>[MUTING]</b> key to memoirize the set value.
	Signal generator			
26V-inch				
		<b>Models</b>	<b>Setting Value</b>	
		LT-26A61BJ	146	
		LT-26A61BU	146	
		LT-26A61BU/C	140	
		LT-26A61SJ	140	
		LT-26A61SU	140	
		LT-26A61SU/C	146	
32V-inch				
		<b>Models</b>	<b>Setting Value</b>	
		LT-32A61BJ	146	
		LT-32A61BU	146	
		LT-32A61BU/C	140	
		LT-32A61SJ	150	
		LT-32A61SU	150	
		LT-32A61SU/C	146	

## SECTION 5 TROUBLESHOOTING

This service manual does not describe TROUBLESHOOTING.



Victor Company of Japan, Limited  
Flat Panel Display Category 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama-city, Kanagawa-prefecture, 221-8528, Japan

(No.YA369)



Printed in Japan  
VPT

# JVC


## SCHEMATIC DIAGRAMS

WIDE LCD PANEL TELEVISION

**LT-26A61BJ, LT-26A61BU, LT-26A61BU<sub>/C</sub>,  
LT-26A61SJ, LT-26A61SU, LT-26A61SU<sub>/C</sub>,  
LT-32A61BJ, LT-32A61BU, LT-32A61BU<sub>/C</sub>,  
LT-32A61SJ, LT-32A61SU, LT-32A61SU<sub>/C</sub>**

CD-ROM No.SML200512

BASIC CHASSIS
FT

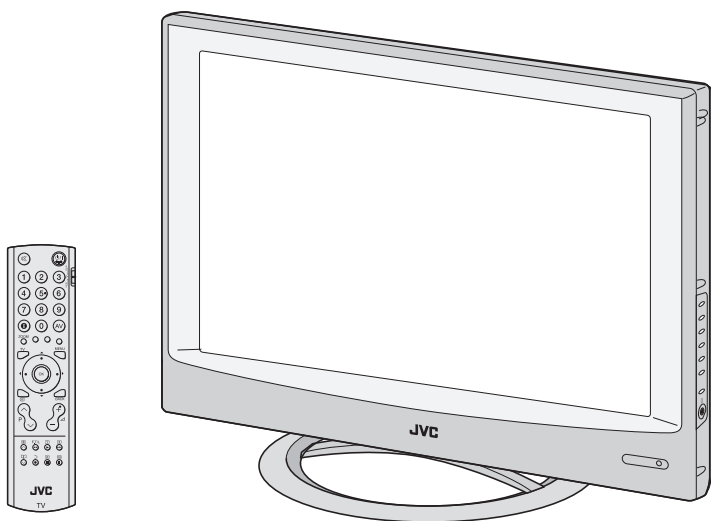


InteríArt  
**T-V LINK**  
**HD**  
ready

LT-26A61BJ, LT-26A61BU, LT-26A61BU/c,  
 LT-26A61SJ, LT-26A61SU, LT-26A61SU/c,  
 LT-32A61BJ, LT-32A61BU, LT-32A61BU/c,  
 LT-32A61SJ, LT-32A61SU, LT-32A61SU/c

# STANDARD CIRCUIT DIAGRAM

## ■ NOTE ON USING CIRCUIT DIAGRAMS

### 1.SAFETY

The components identified by the  symbol and shading are critical for safety. For continued safety replace safety critical components only with manufactures recommended parts.

### 2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

- (1)Input signal : Colour bar signal
- (2)Setting positions of each knob/button and variable resistor : Original setting position when shipped
- (3)Internal resistance of tester : DC 20kΩ/V
- (4)Oscilloscope sweeping time : H ⇒ 20μs / div  
: V ⇒ 5ms / div  
: Others ⇒ Sweeping time is specified
- (5)Voltage values : All DC voltage values

\* Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

### 3.INDICATION OF PARTS SYMBOL [EXAMPLE]

● In the PW board : R209 → R209

### 4.INDICATIONS ON THE CIRCUIT DIAGRAM

#### (1)Resistors

##### ● Resistance value

No unit	: [Ω]
K	: [kΩ]
M	: [MΩ]

##### ● Rated allowable power

No indication	: 1/16 [W]
Others	: As specified

##### ● Type

No indication	: Carbon resistor
OMR	: Oxide metal film resistor
MFR	: Metal film resistor
MPR	: Metal plate resistor
UNFR	: Uninflamable resistor
FR	: Fusible resistor

\* Composition resistor 1/2 [W] is specified as 1/2S or Comp.

#### (2)Capacitors

##### ● Capacitance value

1 or higher	: [pF]
less than 1	: [μF]

##### ● Withstand voltage

No indication	: DC50[V]
Others	: DC withstand voltage [V]
AC indicated	: AC withstand voltage [V]

\* Electrolytic Capacitors

47/50[Example]: Capacitance value [μF]/withstand voltage[V]

##### ●Type

No indication	: Ceramic capacitor
MM	: Metalized mylar capacitor
PP	: Polypropylene capacitor
MPP	: Metalized polypropylene capacitor
MF	: Metalized film capacitor
TF	: Thin film capacitor
BP	: Bipolar electrolytic capacitor
TAN	: Tantalum capacitor

##### (3)Coils

No unit	: [μH]
Others	: As specified

##### (4)Power Supply




	: B1		: B2 (12V)
	: 9V		: 5V

\* Respective voltage values are indicated





##### (5)Test point

	: Test point		: Only test point display
--	--------------	--	---------------------------



##### (6)Connecting method

	: Connector		: Wrapping or soldering
	: Receptacle		

##### (7)Ground symbol

	: LIVE side ground
	: ISOLATED(NEUTRAL) side ground
	: EARTH ground
	: DIGITAL ground

## 5.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (  ) side GND and the ISOLATED(NEUTRAL) : (  ) side GND. Therefore, care must be taken for the following points.

- (1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. If the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.
- (2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus measure with a measuring apparatus ( oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected, a fuse or any parts will be broken.

◆ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

#### NOTE

◆ Due improvement in performance, some part numbers show in the circuit diagram may not agree with those indicated in the part list.

When ordering parts, please use the numbers that appear in the Parts List.

CONTENTS

SEMICONDUCTOR SHAPES .....2-2

WIRING DIAGRAM .....2-3

BLOCK DIAGRAM .....2-5

CIRCUIT DIAGRAMS

    MAIN PWB CIRCUIT DIAGRAM ..... 2-7

    KEY PWB CIRCUIT DIAGRAM ..... 2-17

    LED PWB CIRCUIT DIAGRAM ..... 2-18

    POWER PWB CIRCUIT DIAGRAM ..... 2-19

PATTERN DIAGRAMS

    MAIN PWB PATTERN ..... 2-25

    POWER PWB PATTERN ..... 2-29

    KEY PWB PATTERN ..... 2-31

    LED PWB PATTERN ..... 2-31

VOLTAGE CHATRS..... 2-32

WAVEFORMS ..... 2-33

USING P.W. BOARD

P.W.B ASS'Y name	LT-26A61BJ	LT-26A61BU	LT-26A61BU/C	LT-26A61SJ	LT-26A61SU	LT-26A61SU/C
MAIN P.W. BOARD	QAL0823-001			QAL0822-001		QAL0823-001
POWER P.W. BOARD	QAL0826-001					
LED P.W. BOARD	QAL0827-001					
KEY P.W. BOARD	QAL0828-001					

P.W.B ASS'Y name	LT-32A61BJ	LT-32A61BU	LT-32A61BU/C	LT-32A61SJ	LT-32A61SU	LT-32A61SU/C
MAIN P.W. BOARD	QAL0825-001		QAL0824-001			QAL0825-001
POWER P.W. BOARD	QAL0826-001					
LED P.W. BOARD	QAL0827-001					
KEY P.W. BOARD	QAL0828-001					

SEMICONDUCTOR SHAPES

TRANSISTOR

BOTTOM VIEW	FRONT VIEW				TOP VIEW
					CHIP TR 


IC

BOTTOM VIEW	FRONT VIEW			TOP VIEW

CHIP IC


TOP VIEW		

WIRING DIAGRAM

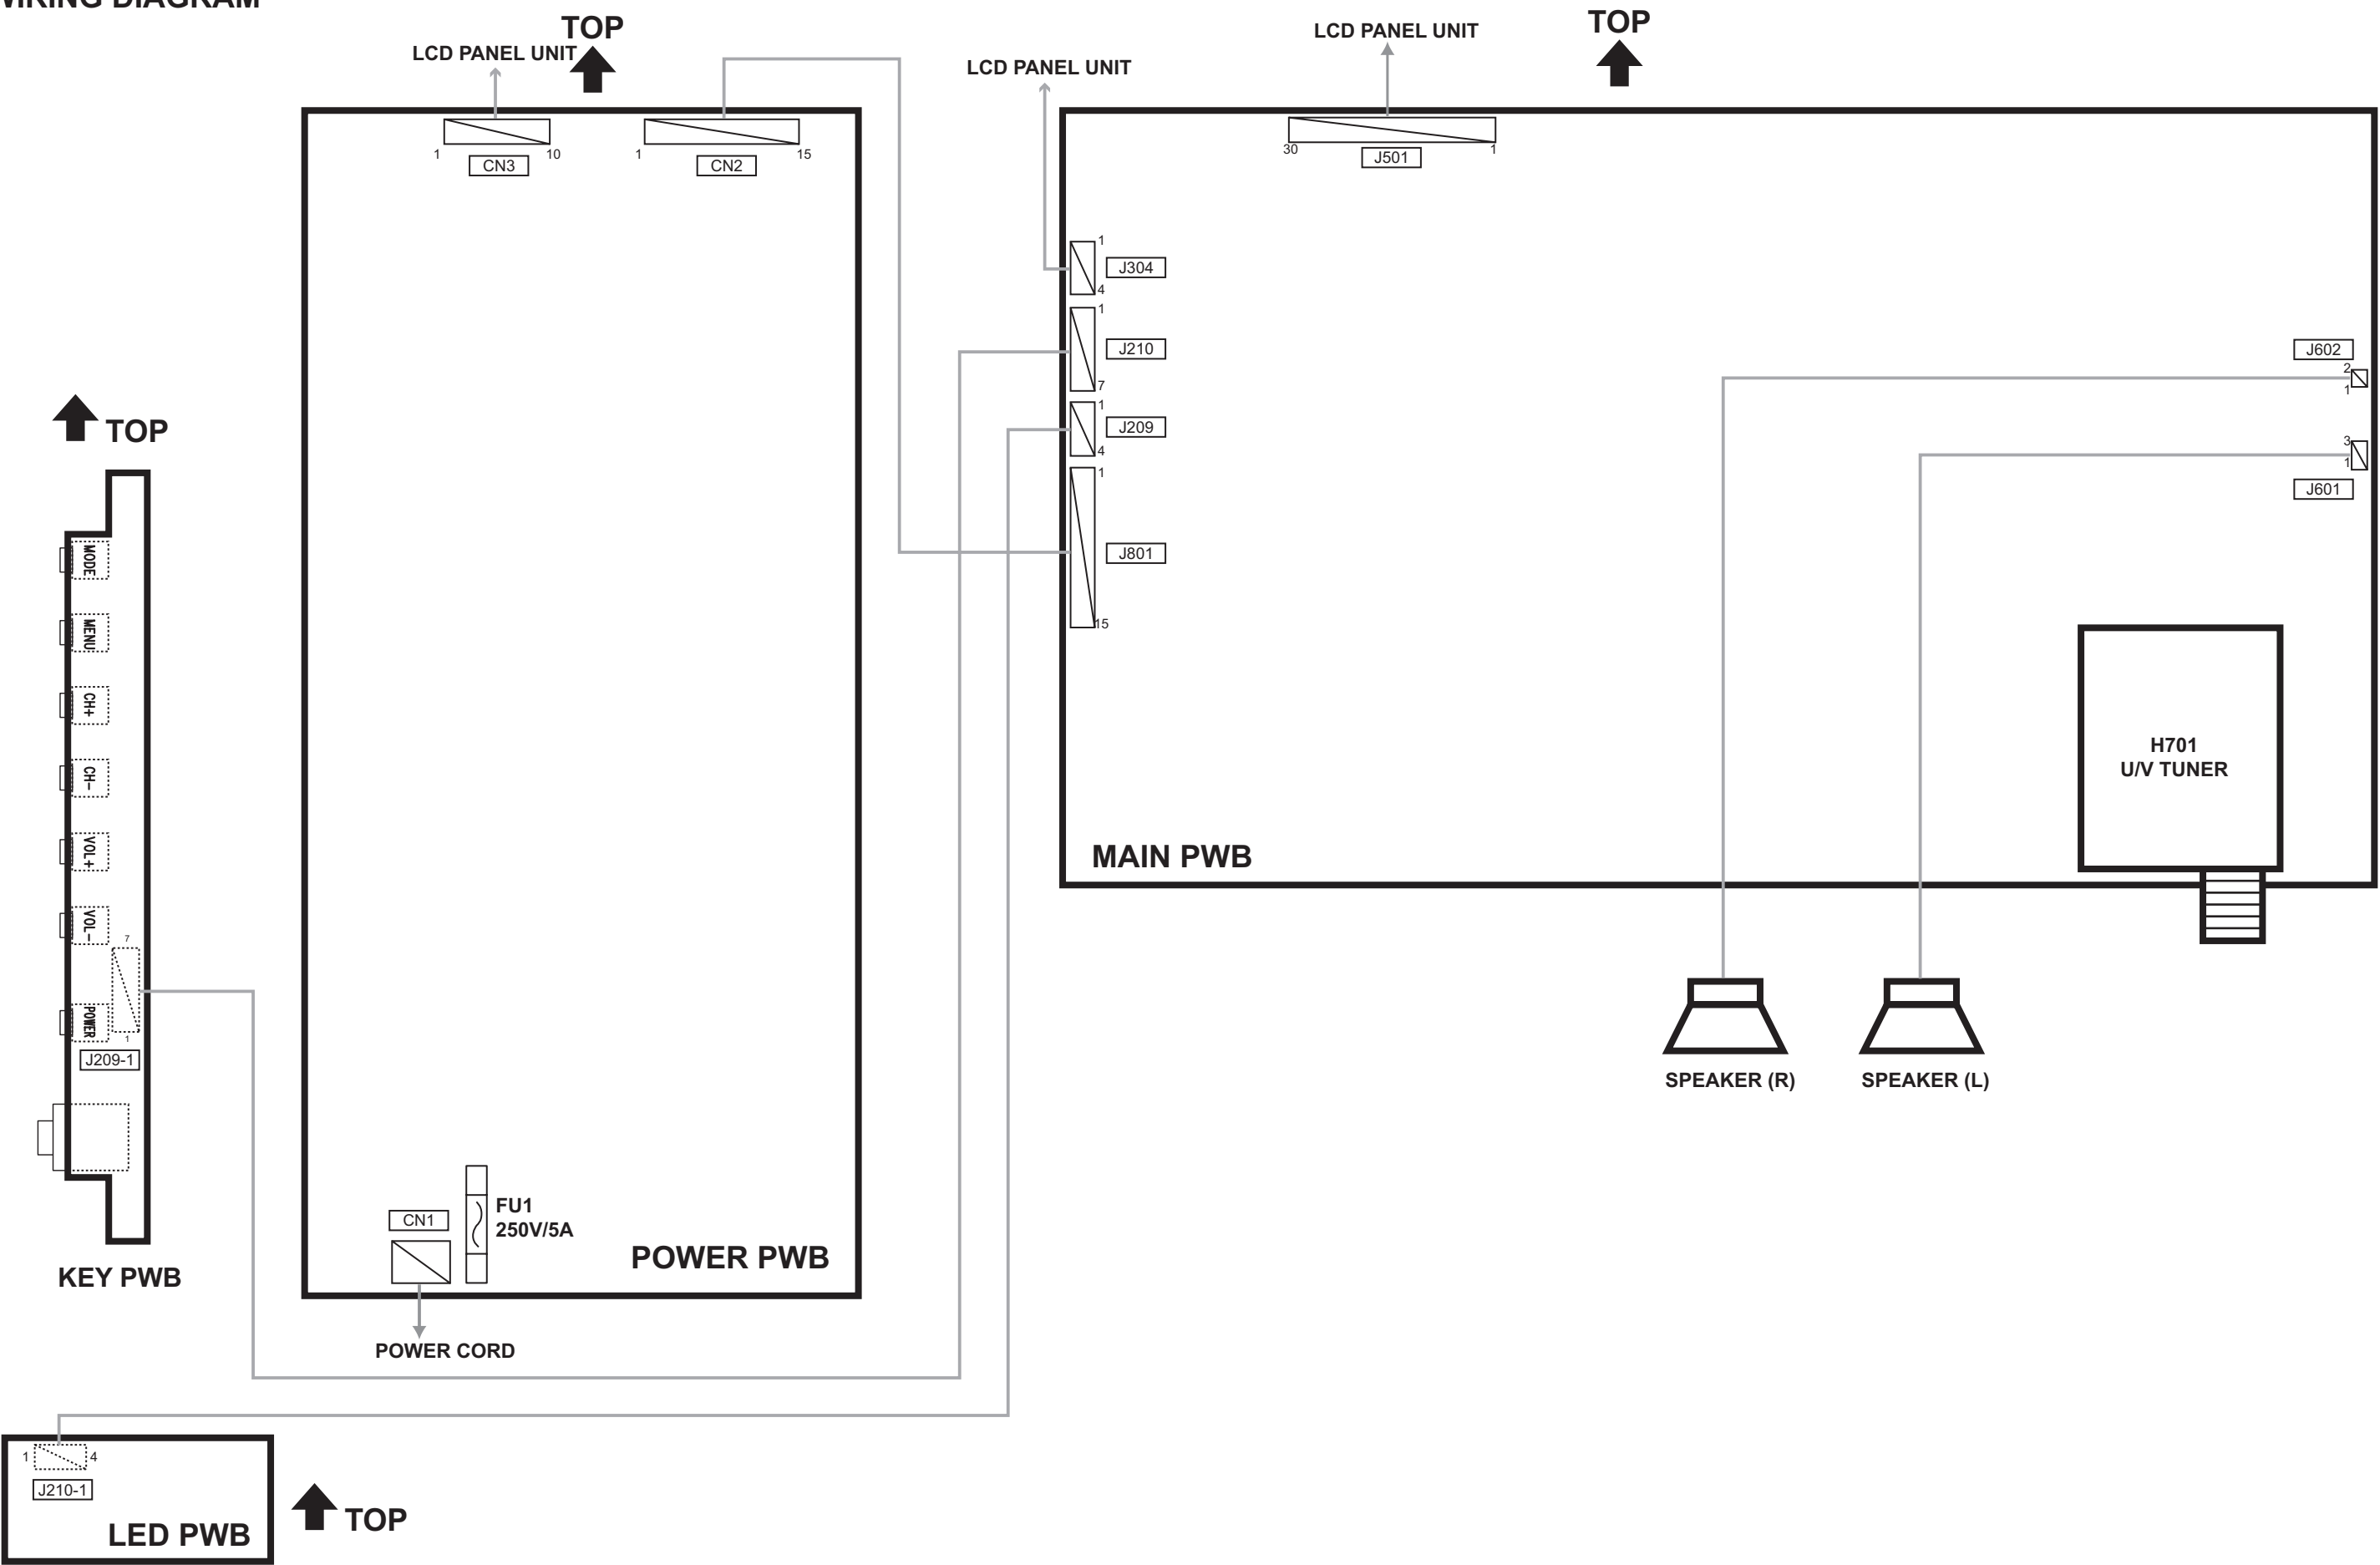




**BLOCK DIAGRAM**

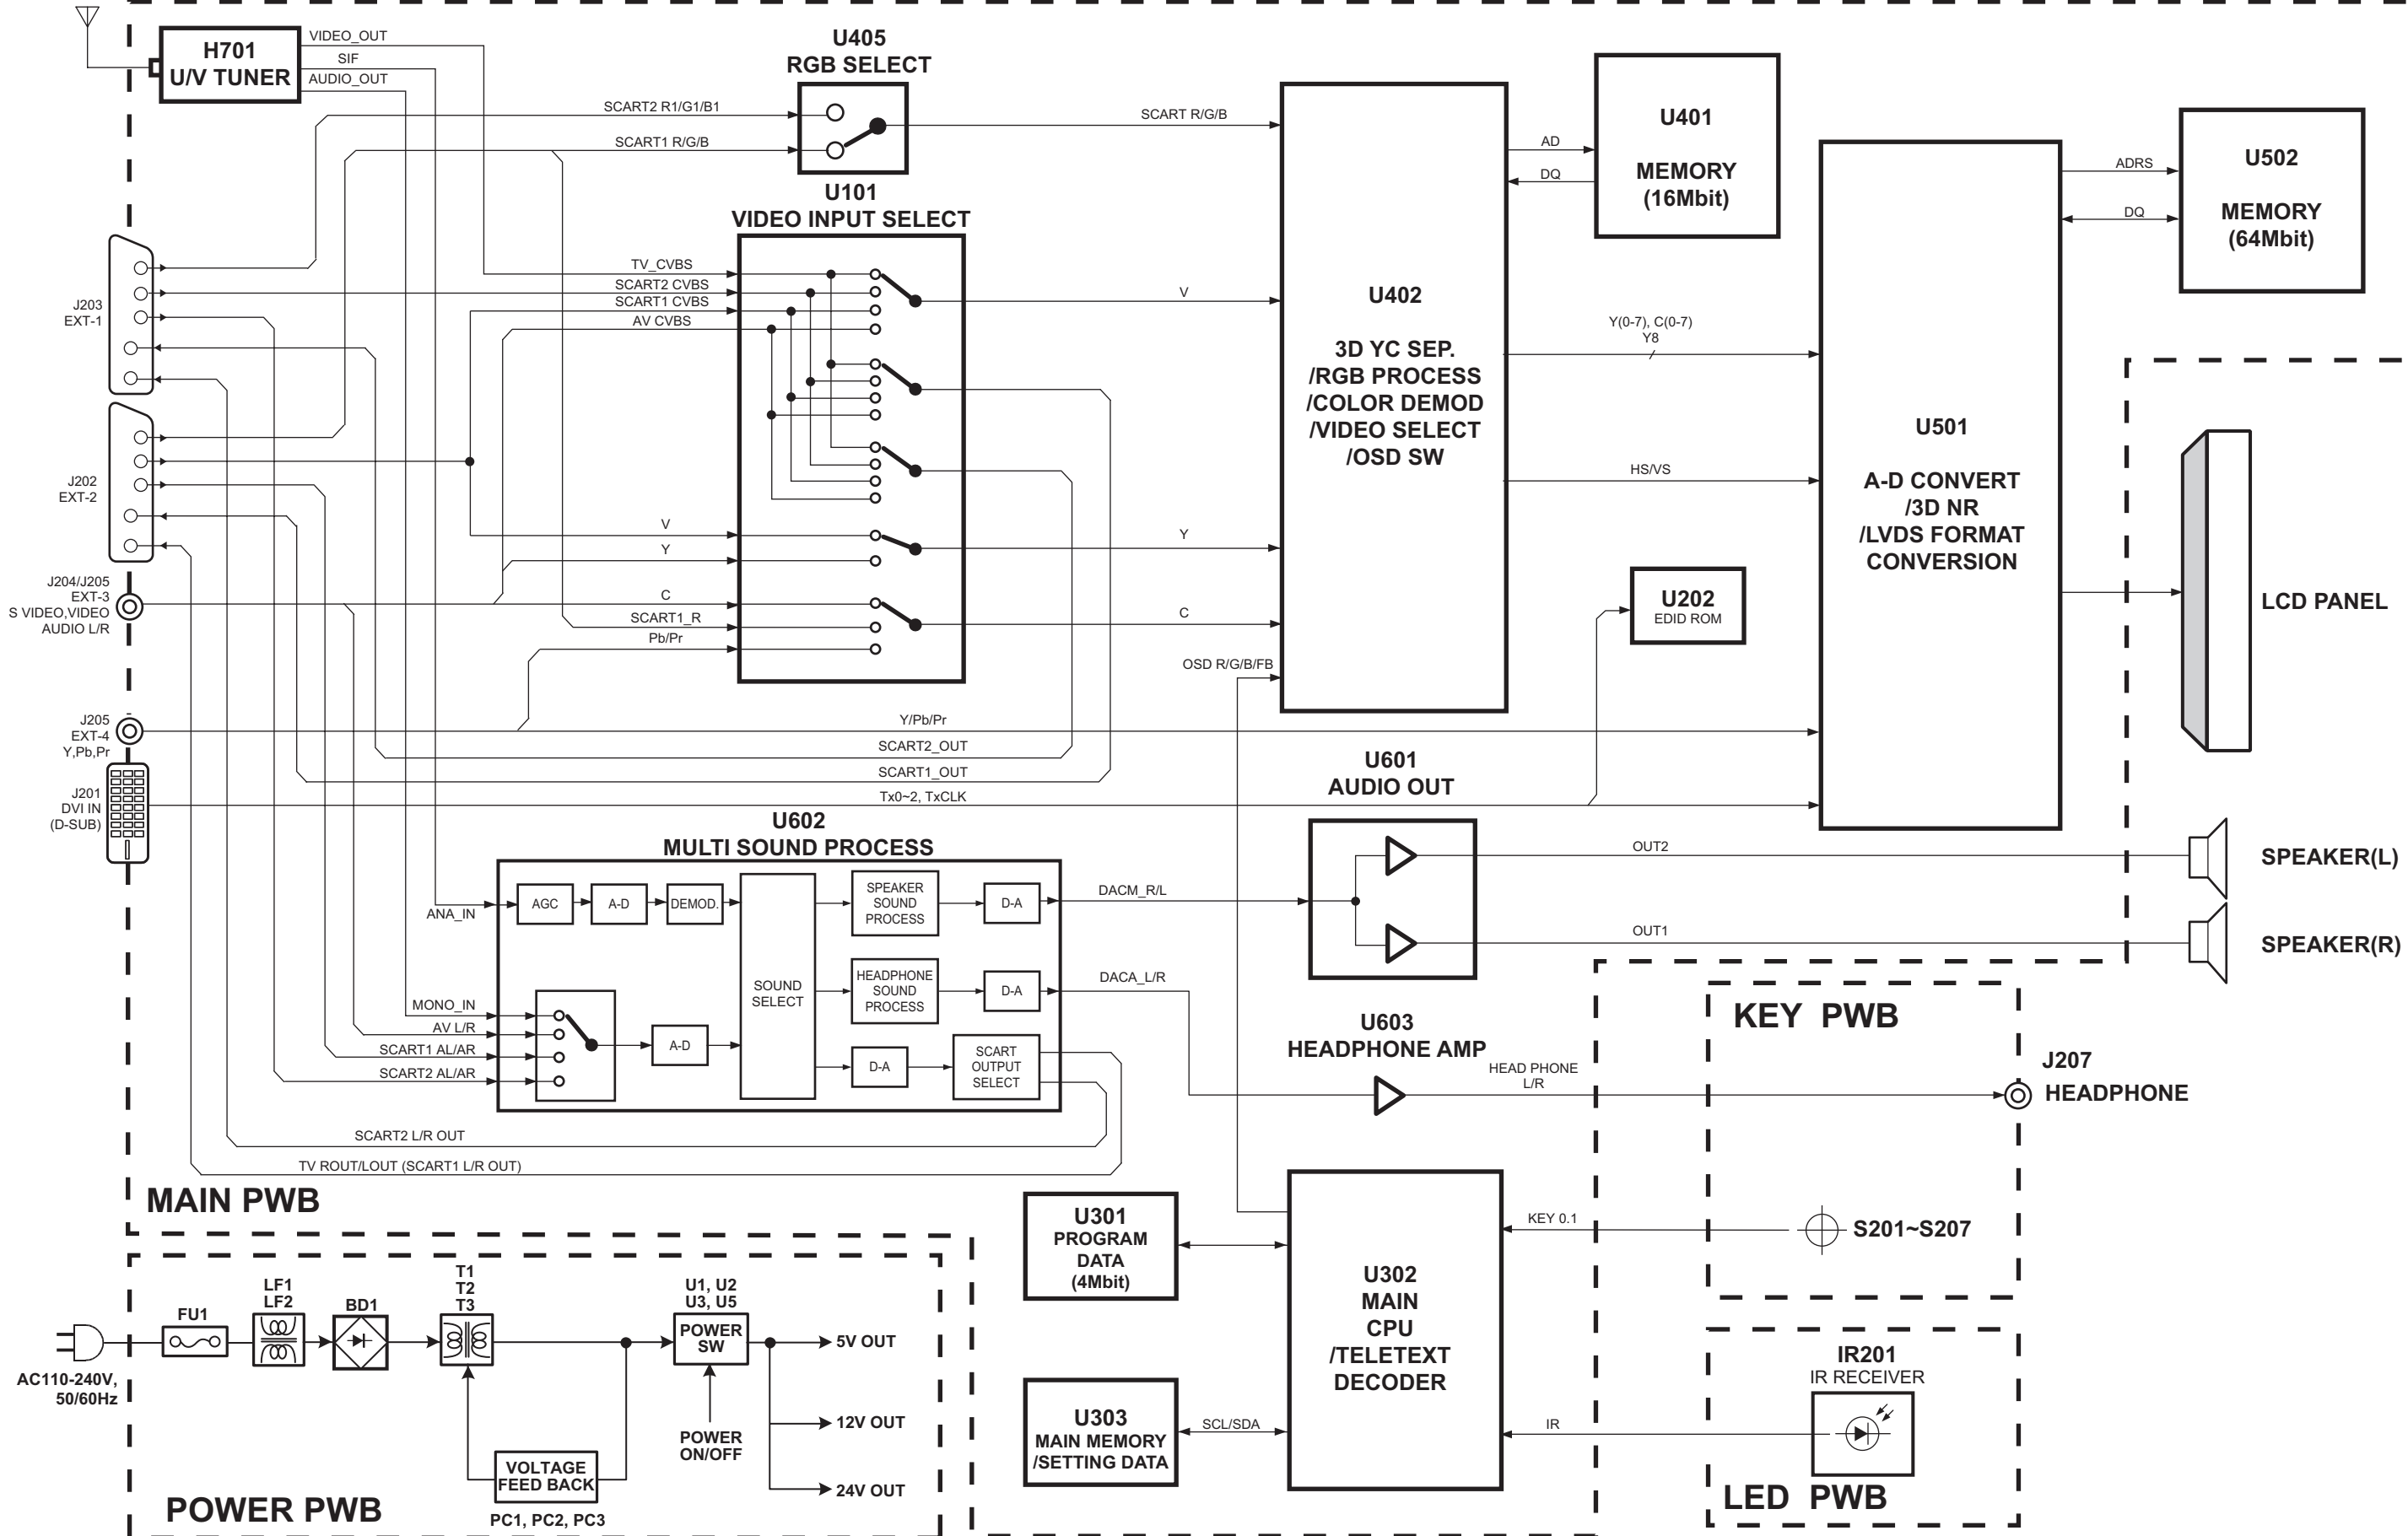

MAIN PWB CIRCUIT DIAGRAM [WHOLE CHART]

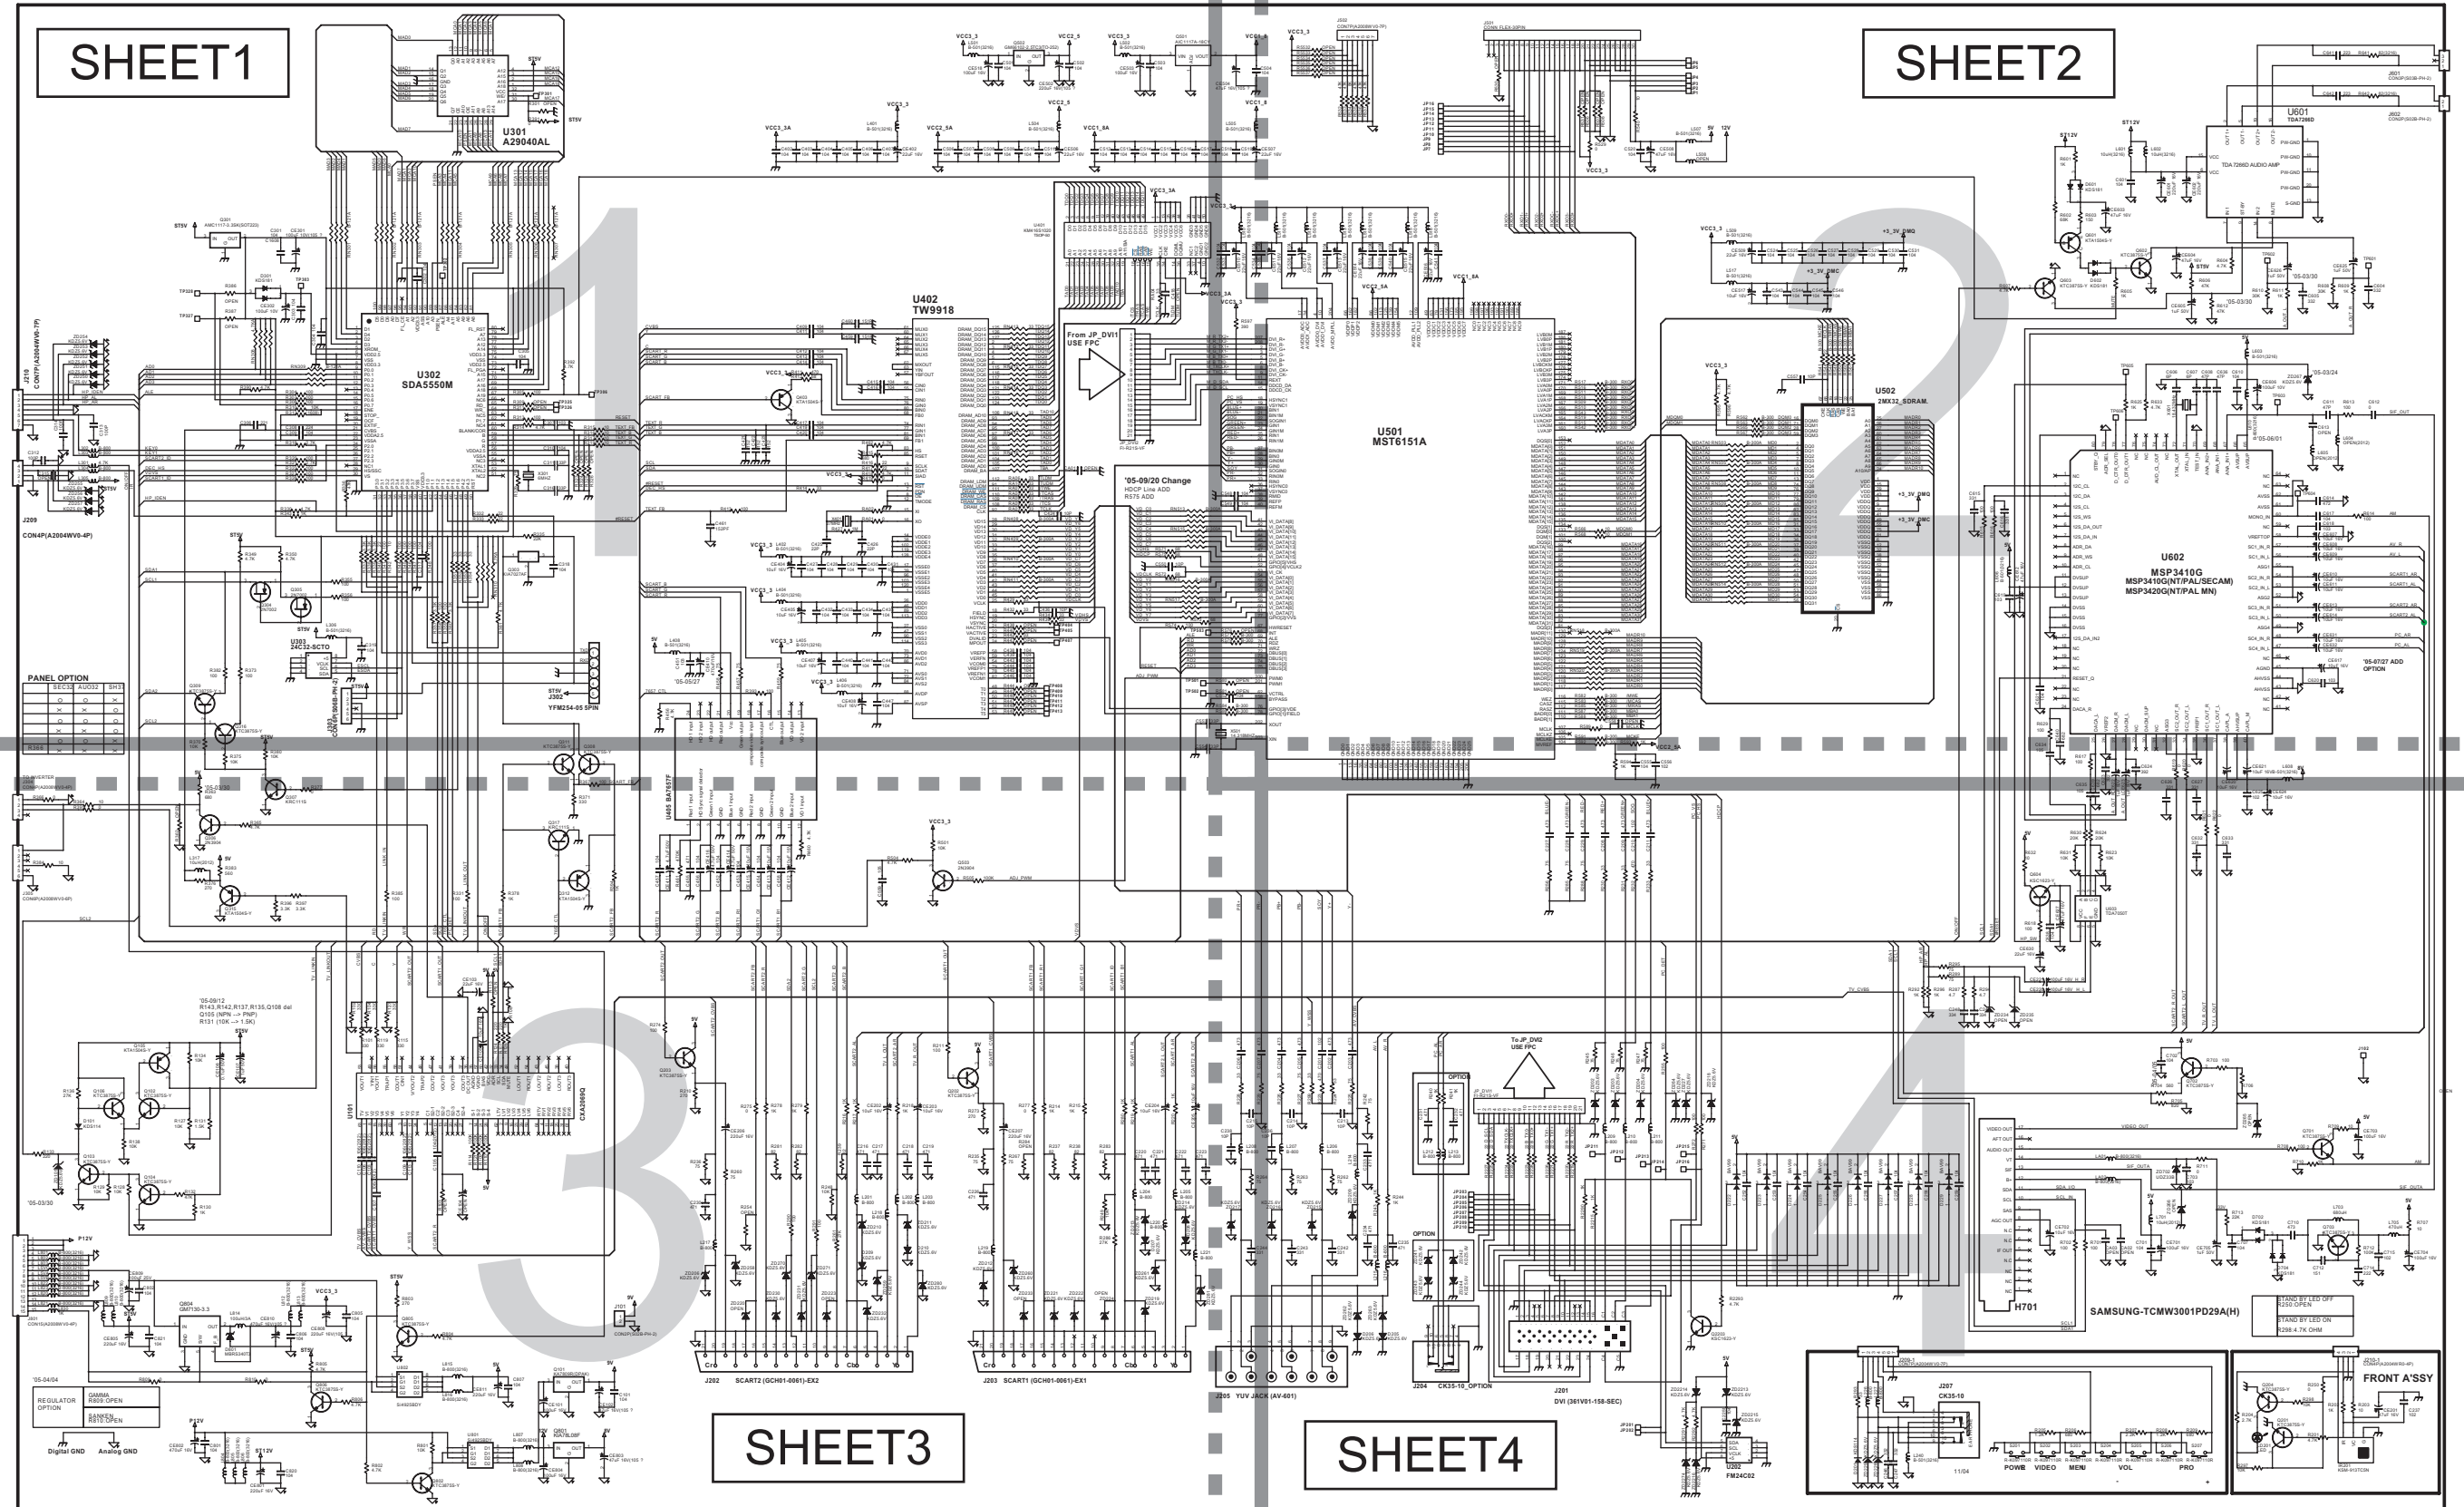

Note: Please refer to SHEET1-4 for details of this circuit diagram.






MAIN PWB ASS'Y(2/4)

QAL0823-001 [LT-26A61BJ,LT-26A61BU,  
LT-26A61BU/C,LT-26A61SU/C]


QAL0822-001 [LT-26A61SJ,LT-26A61SU]

QAL0825-001 [LT-32A61BJ,LT-32A61BU,LT-32A61SU/C]



QAL0824-001 [LT-32A61BU/C,LT-32A61SJ,LT-32A61SU]

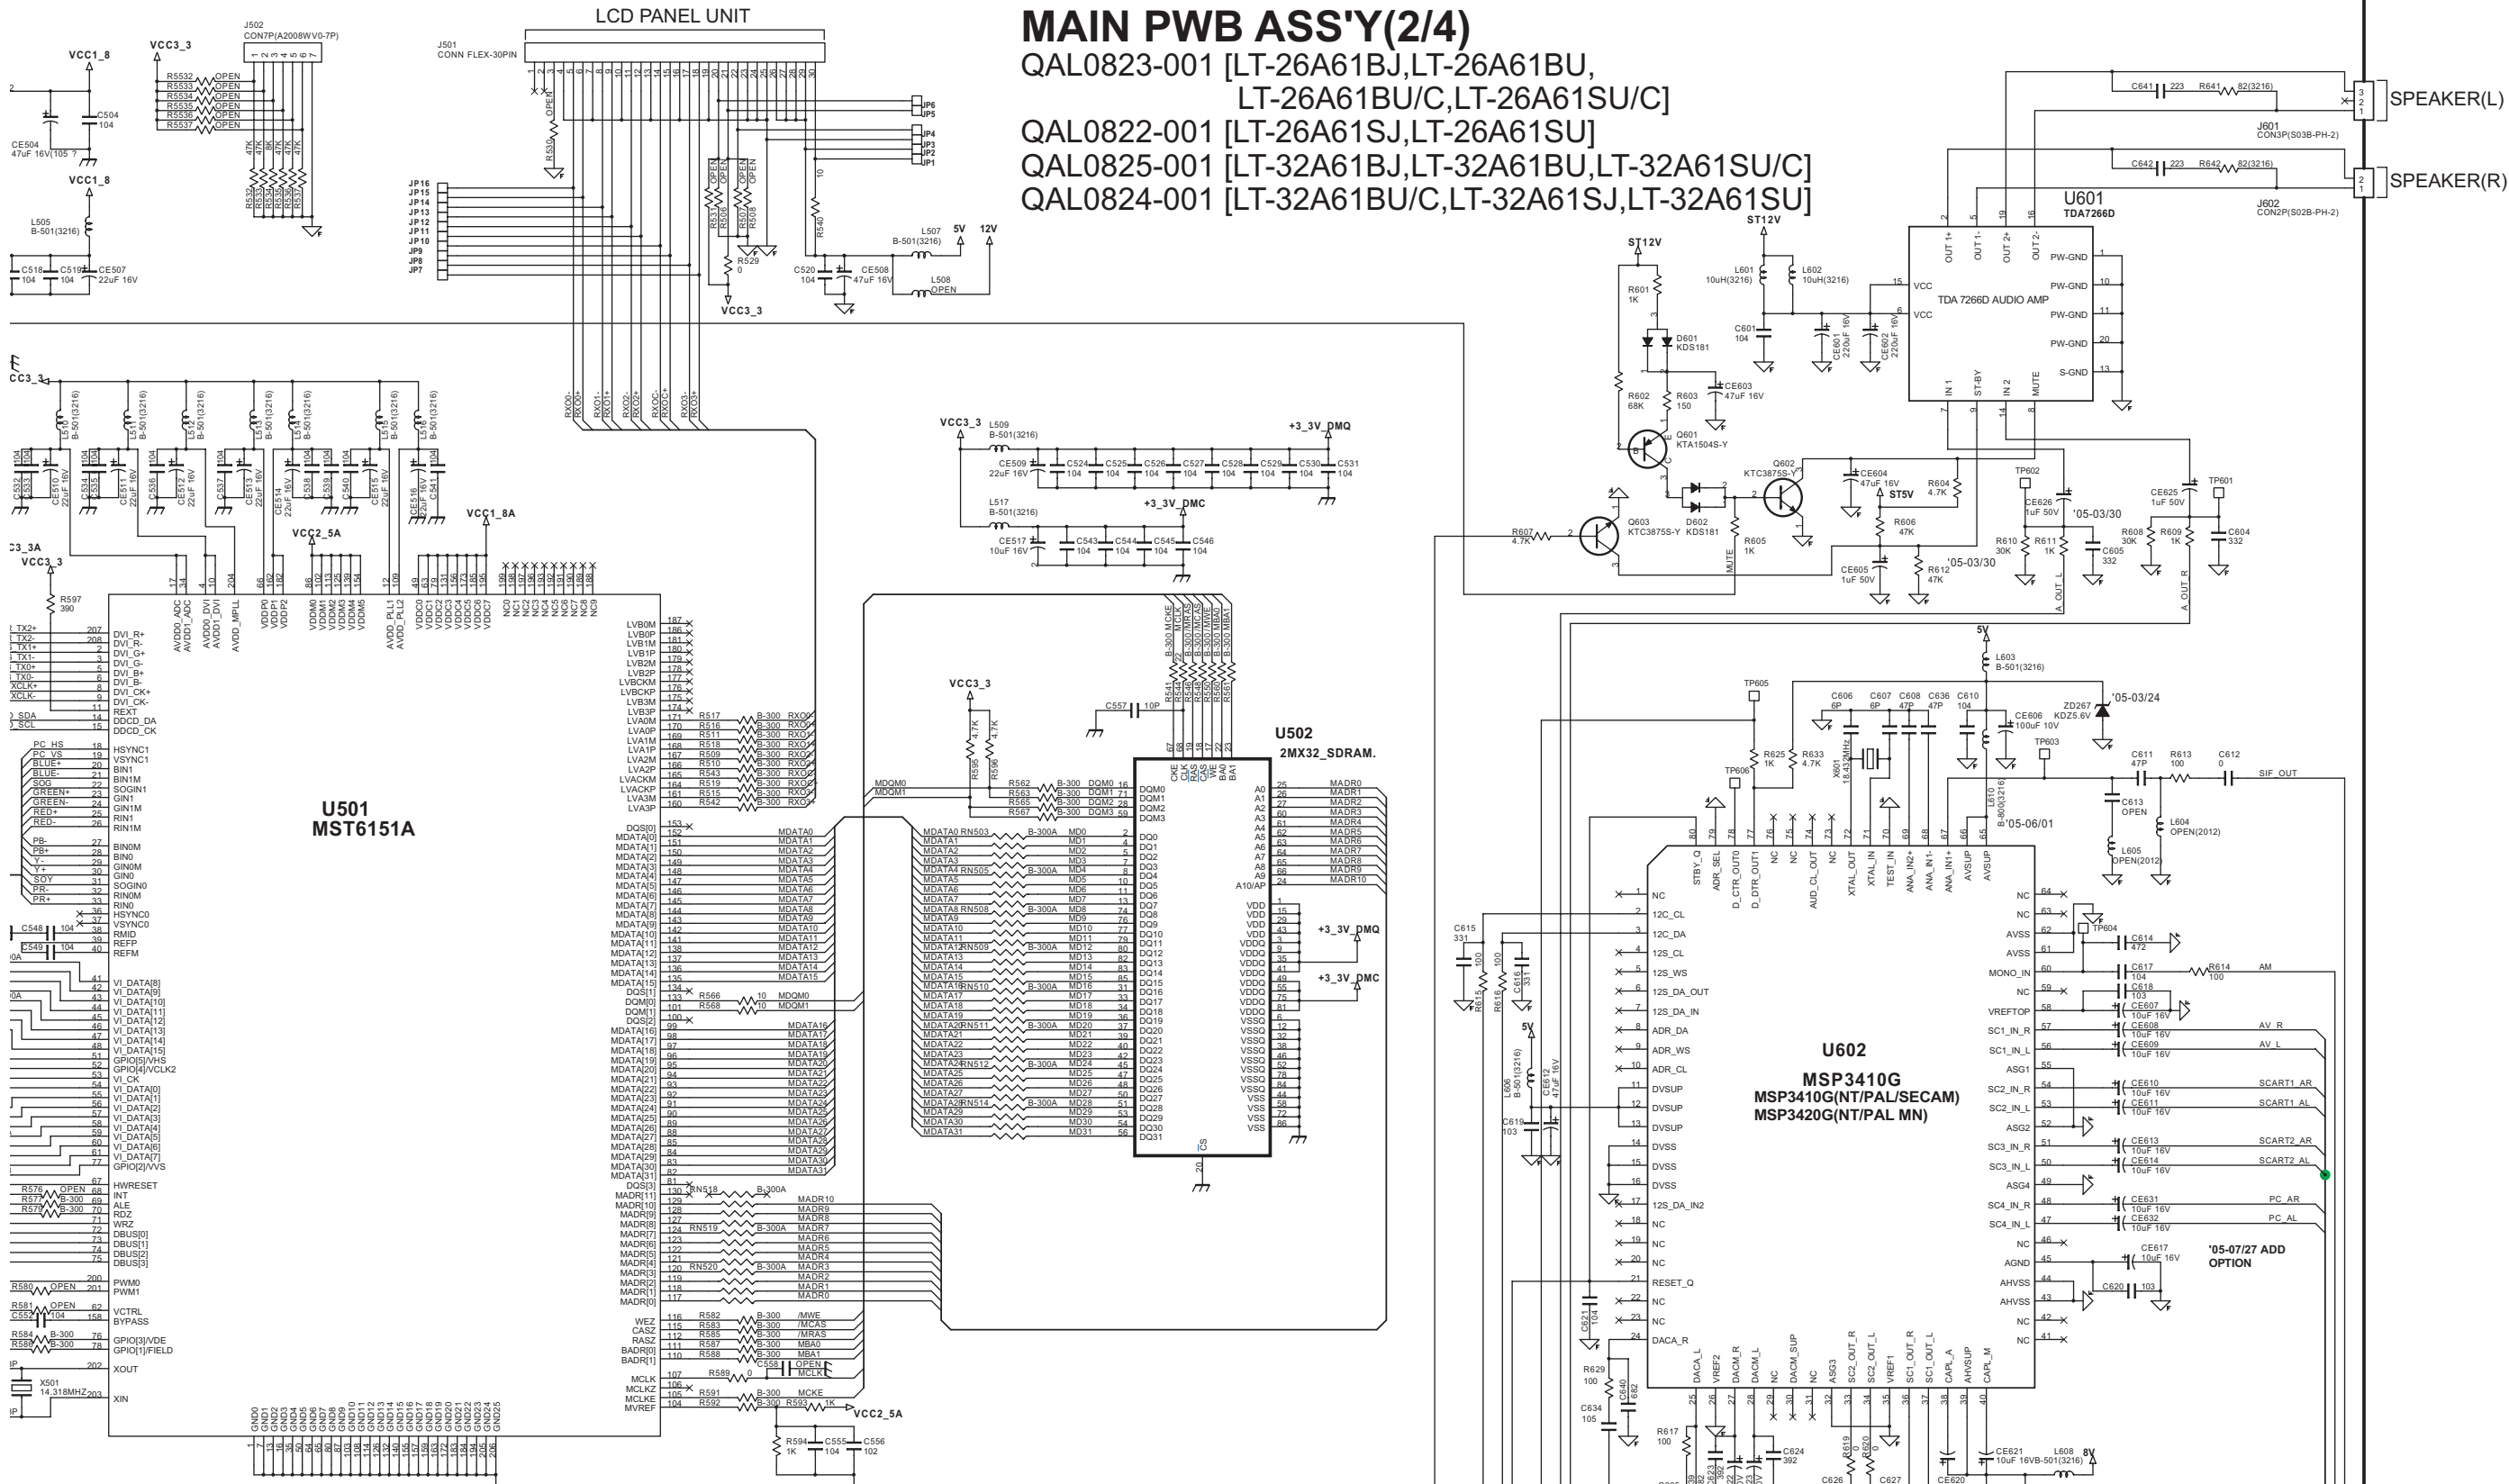


MAIN PWB CIRCUIT DIAGRAM (3/4) SHEET3

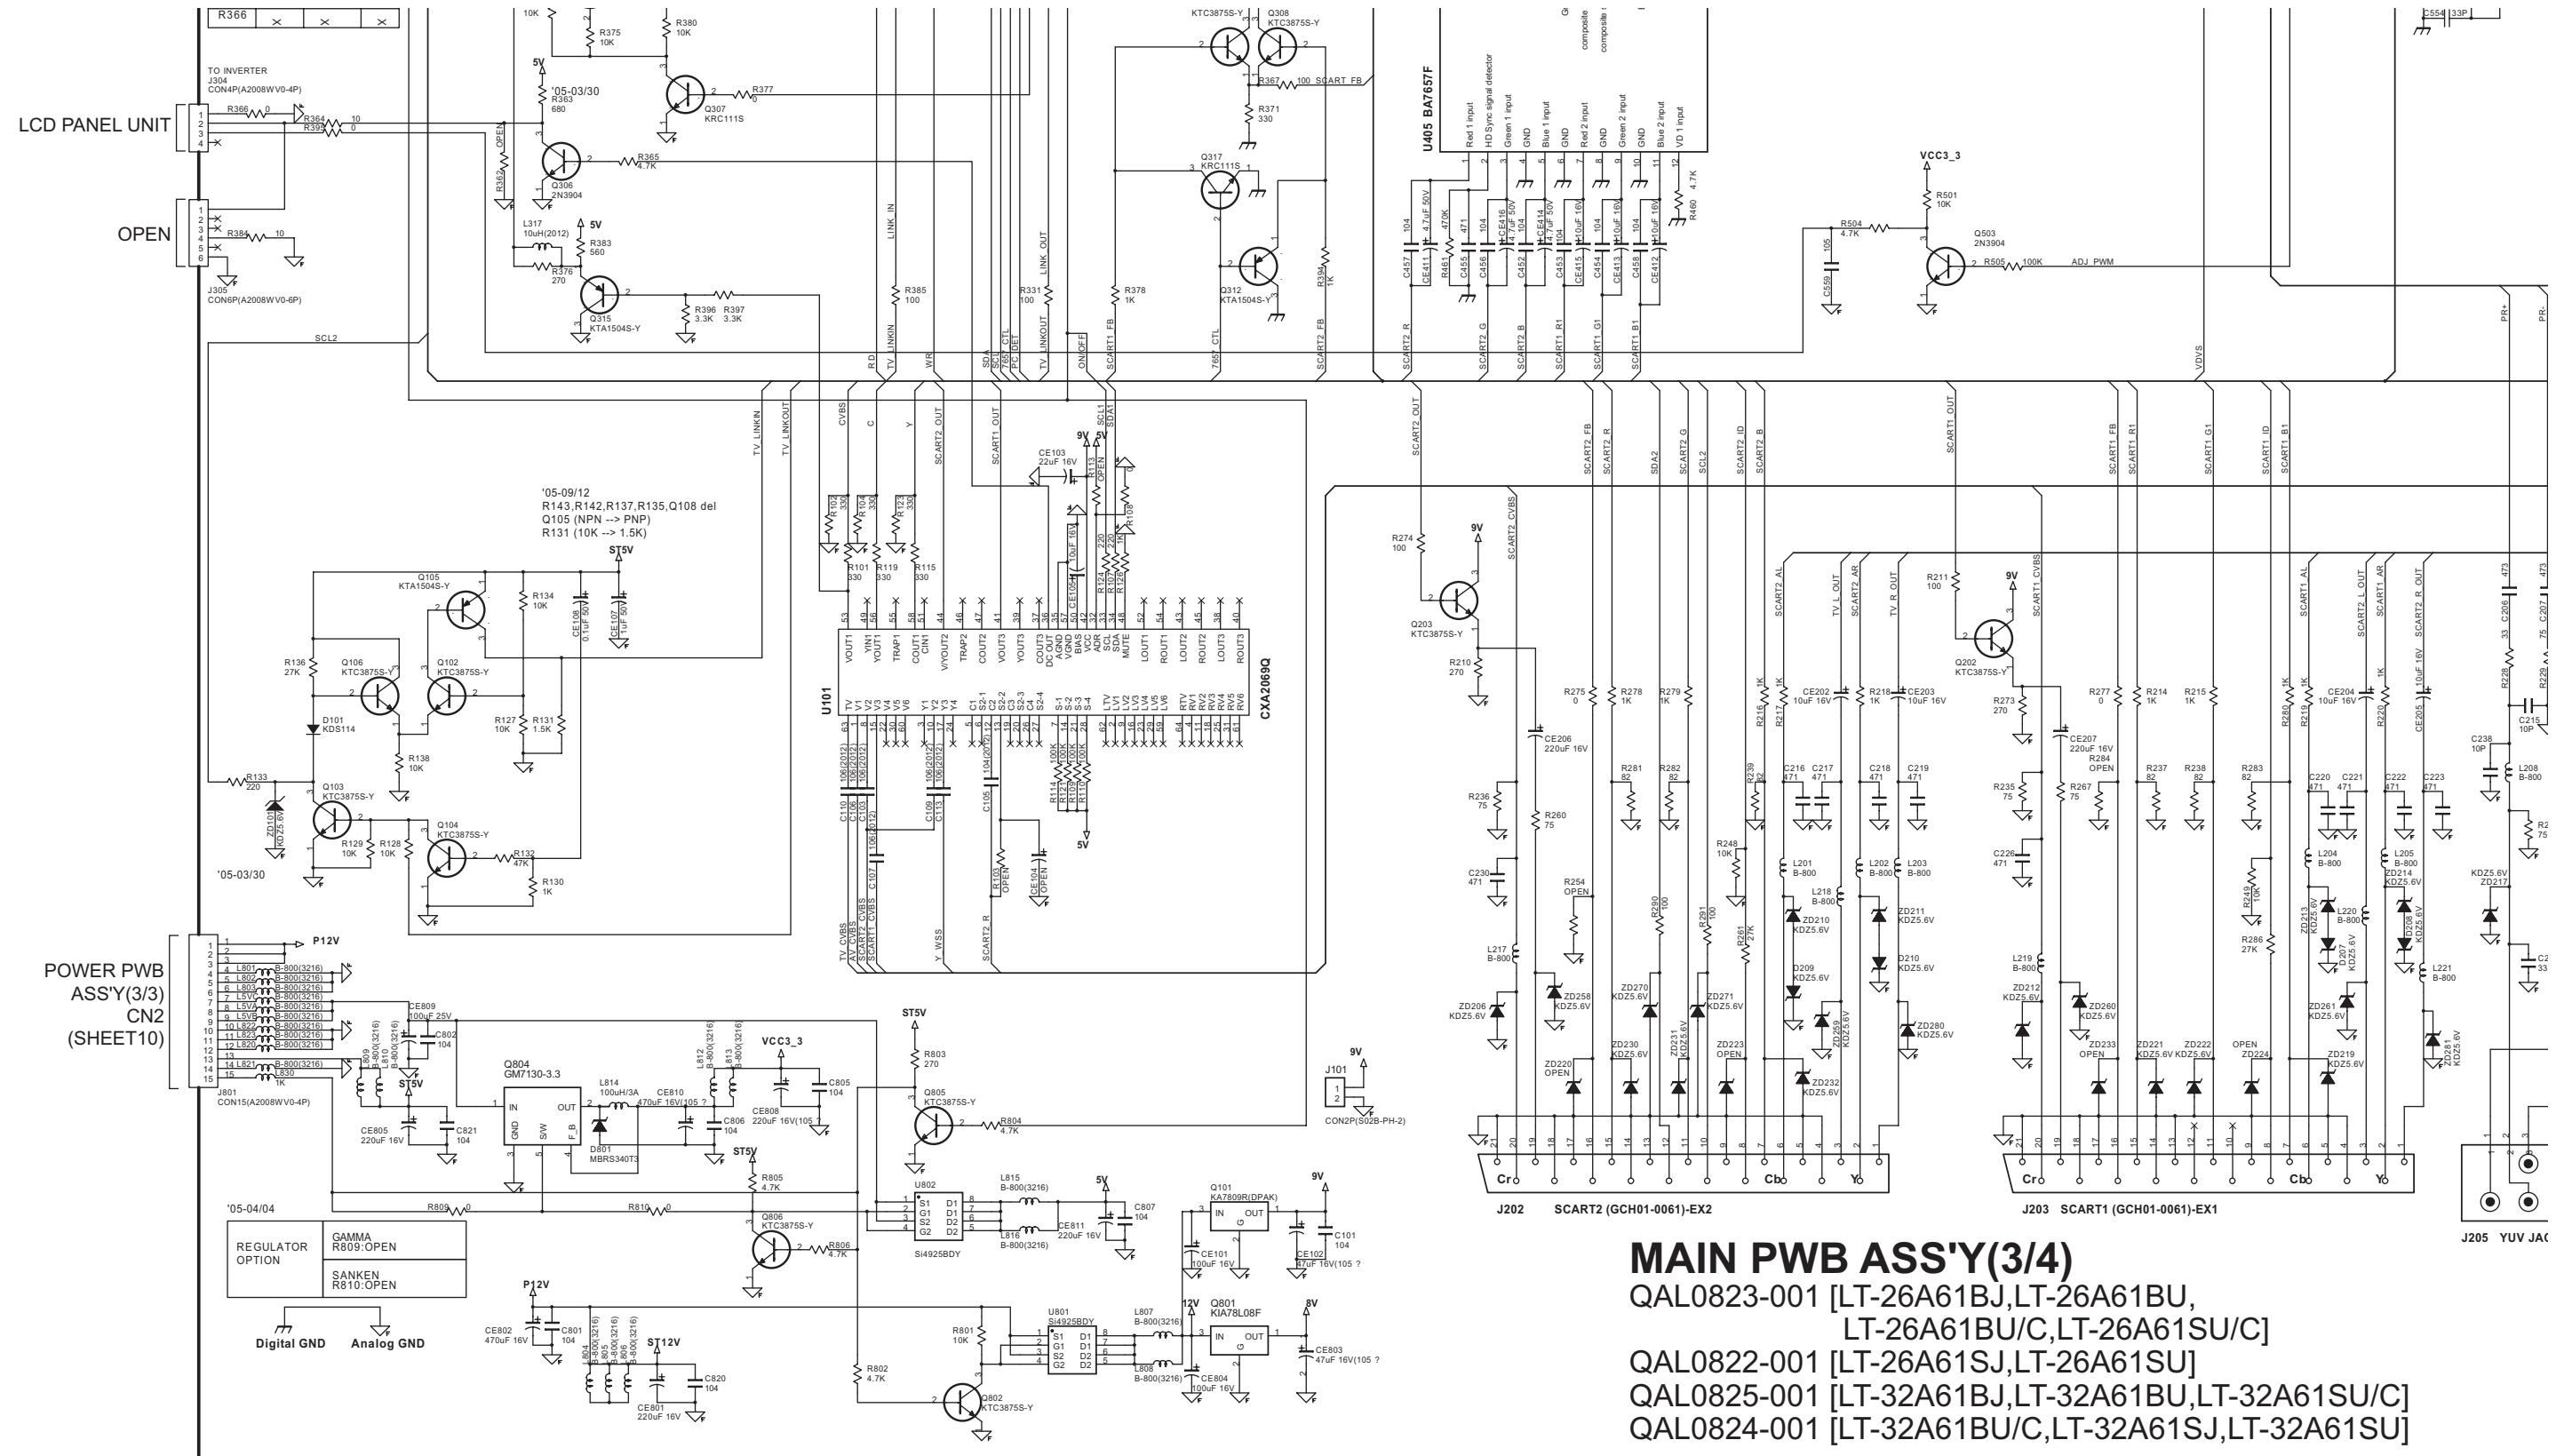




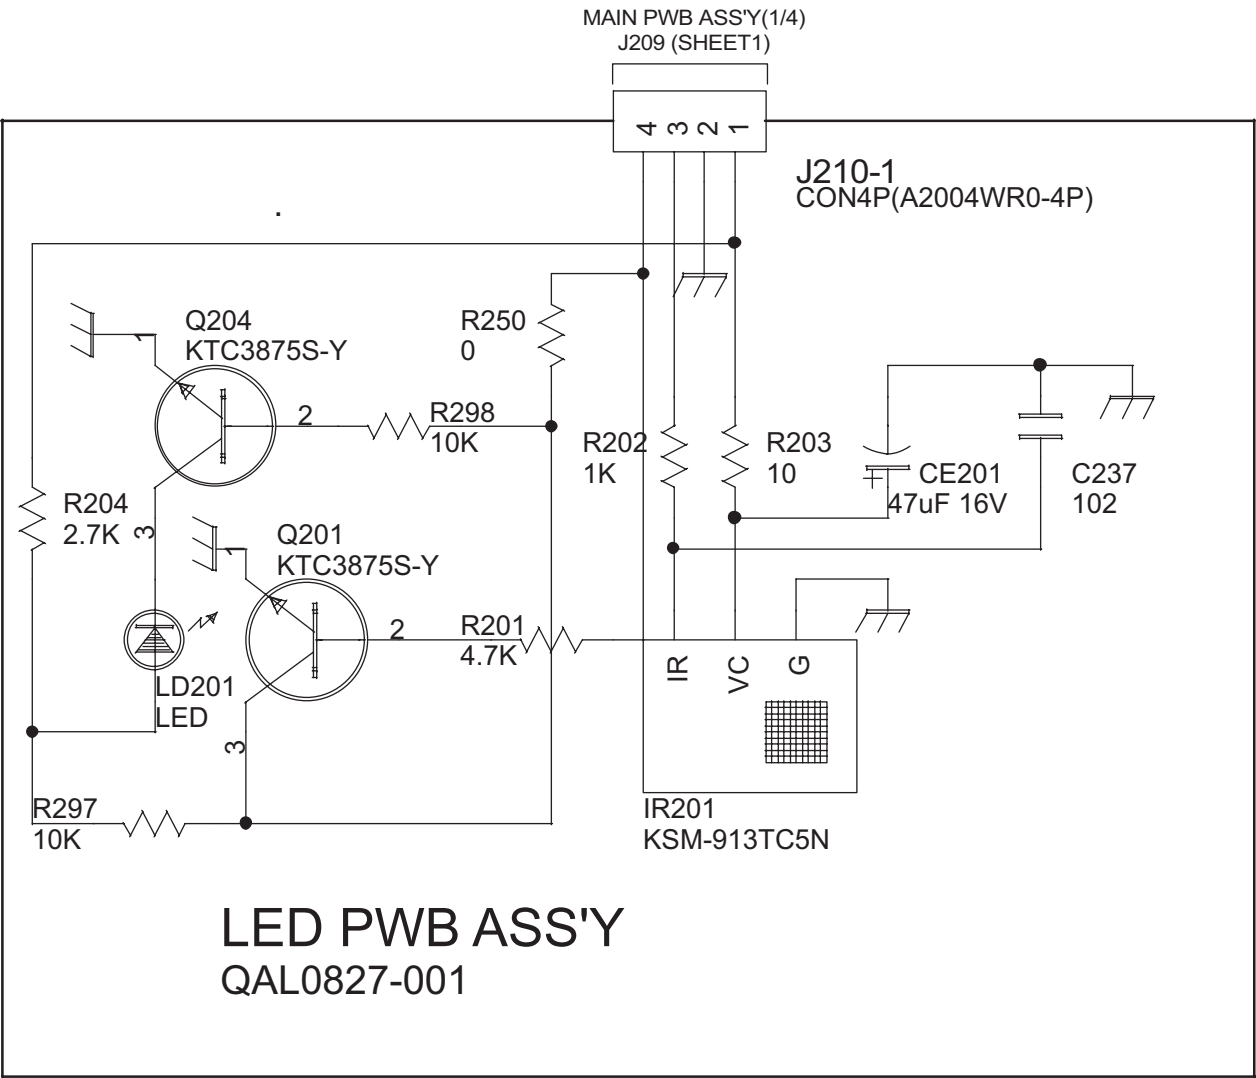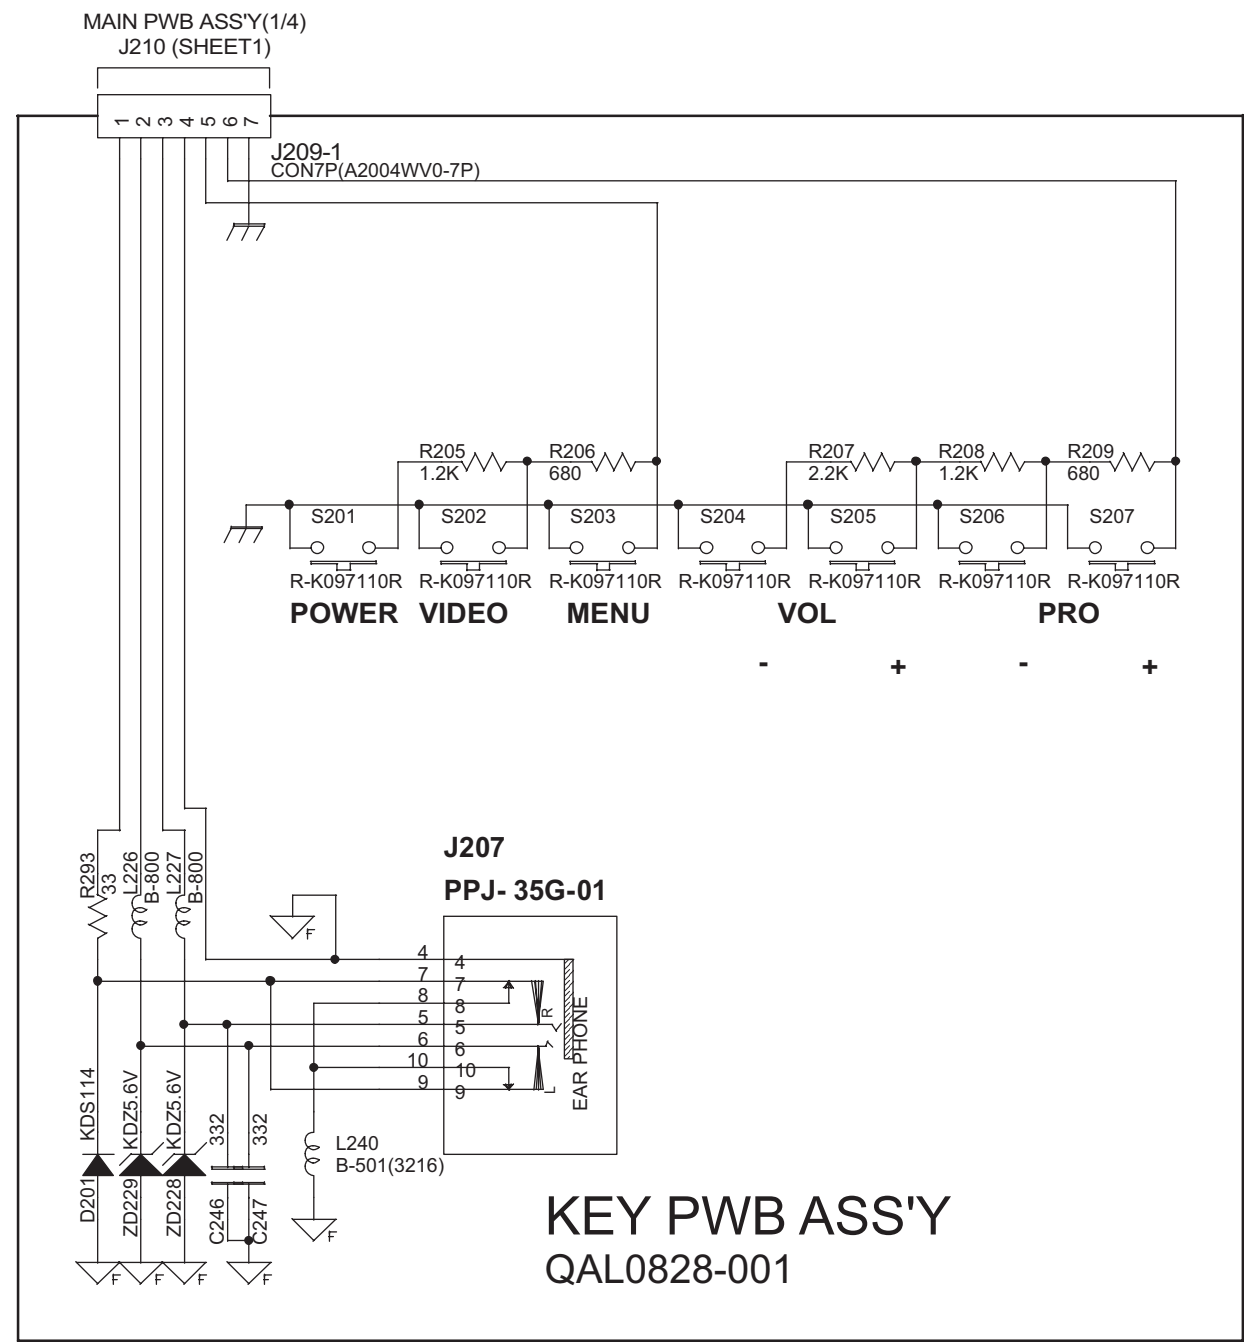


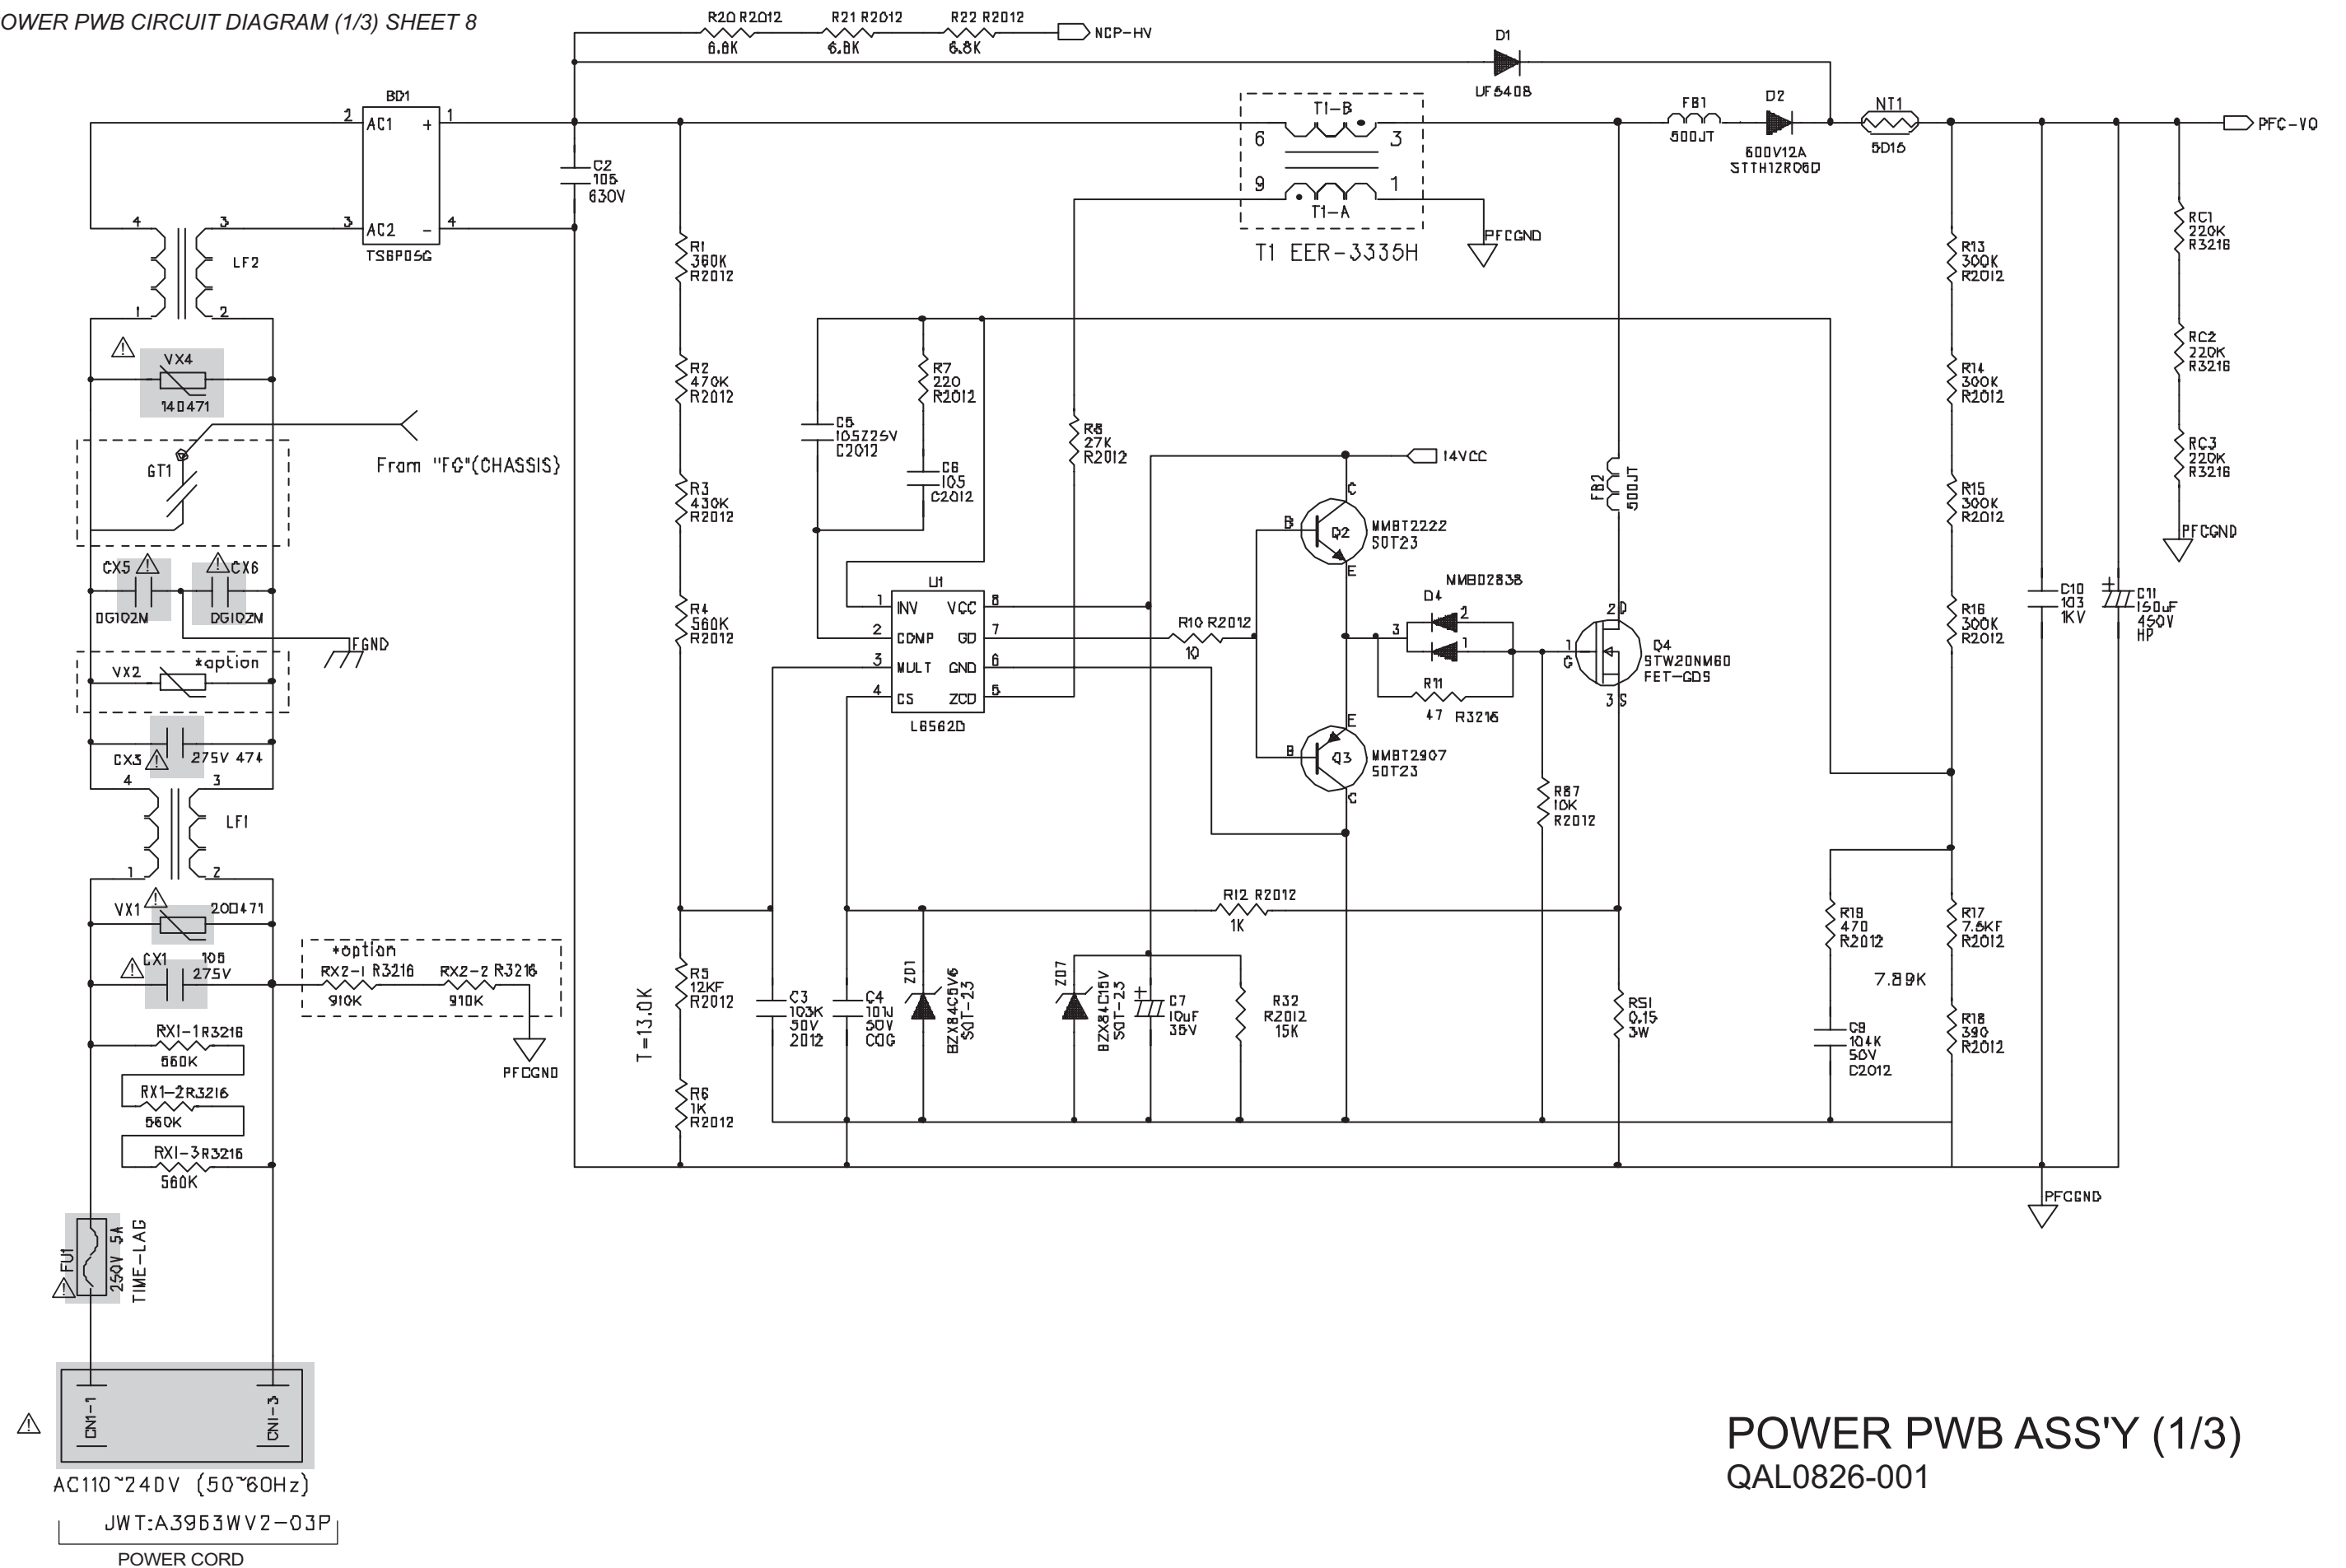



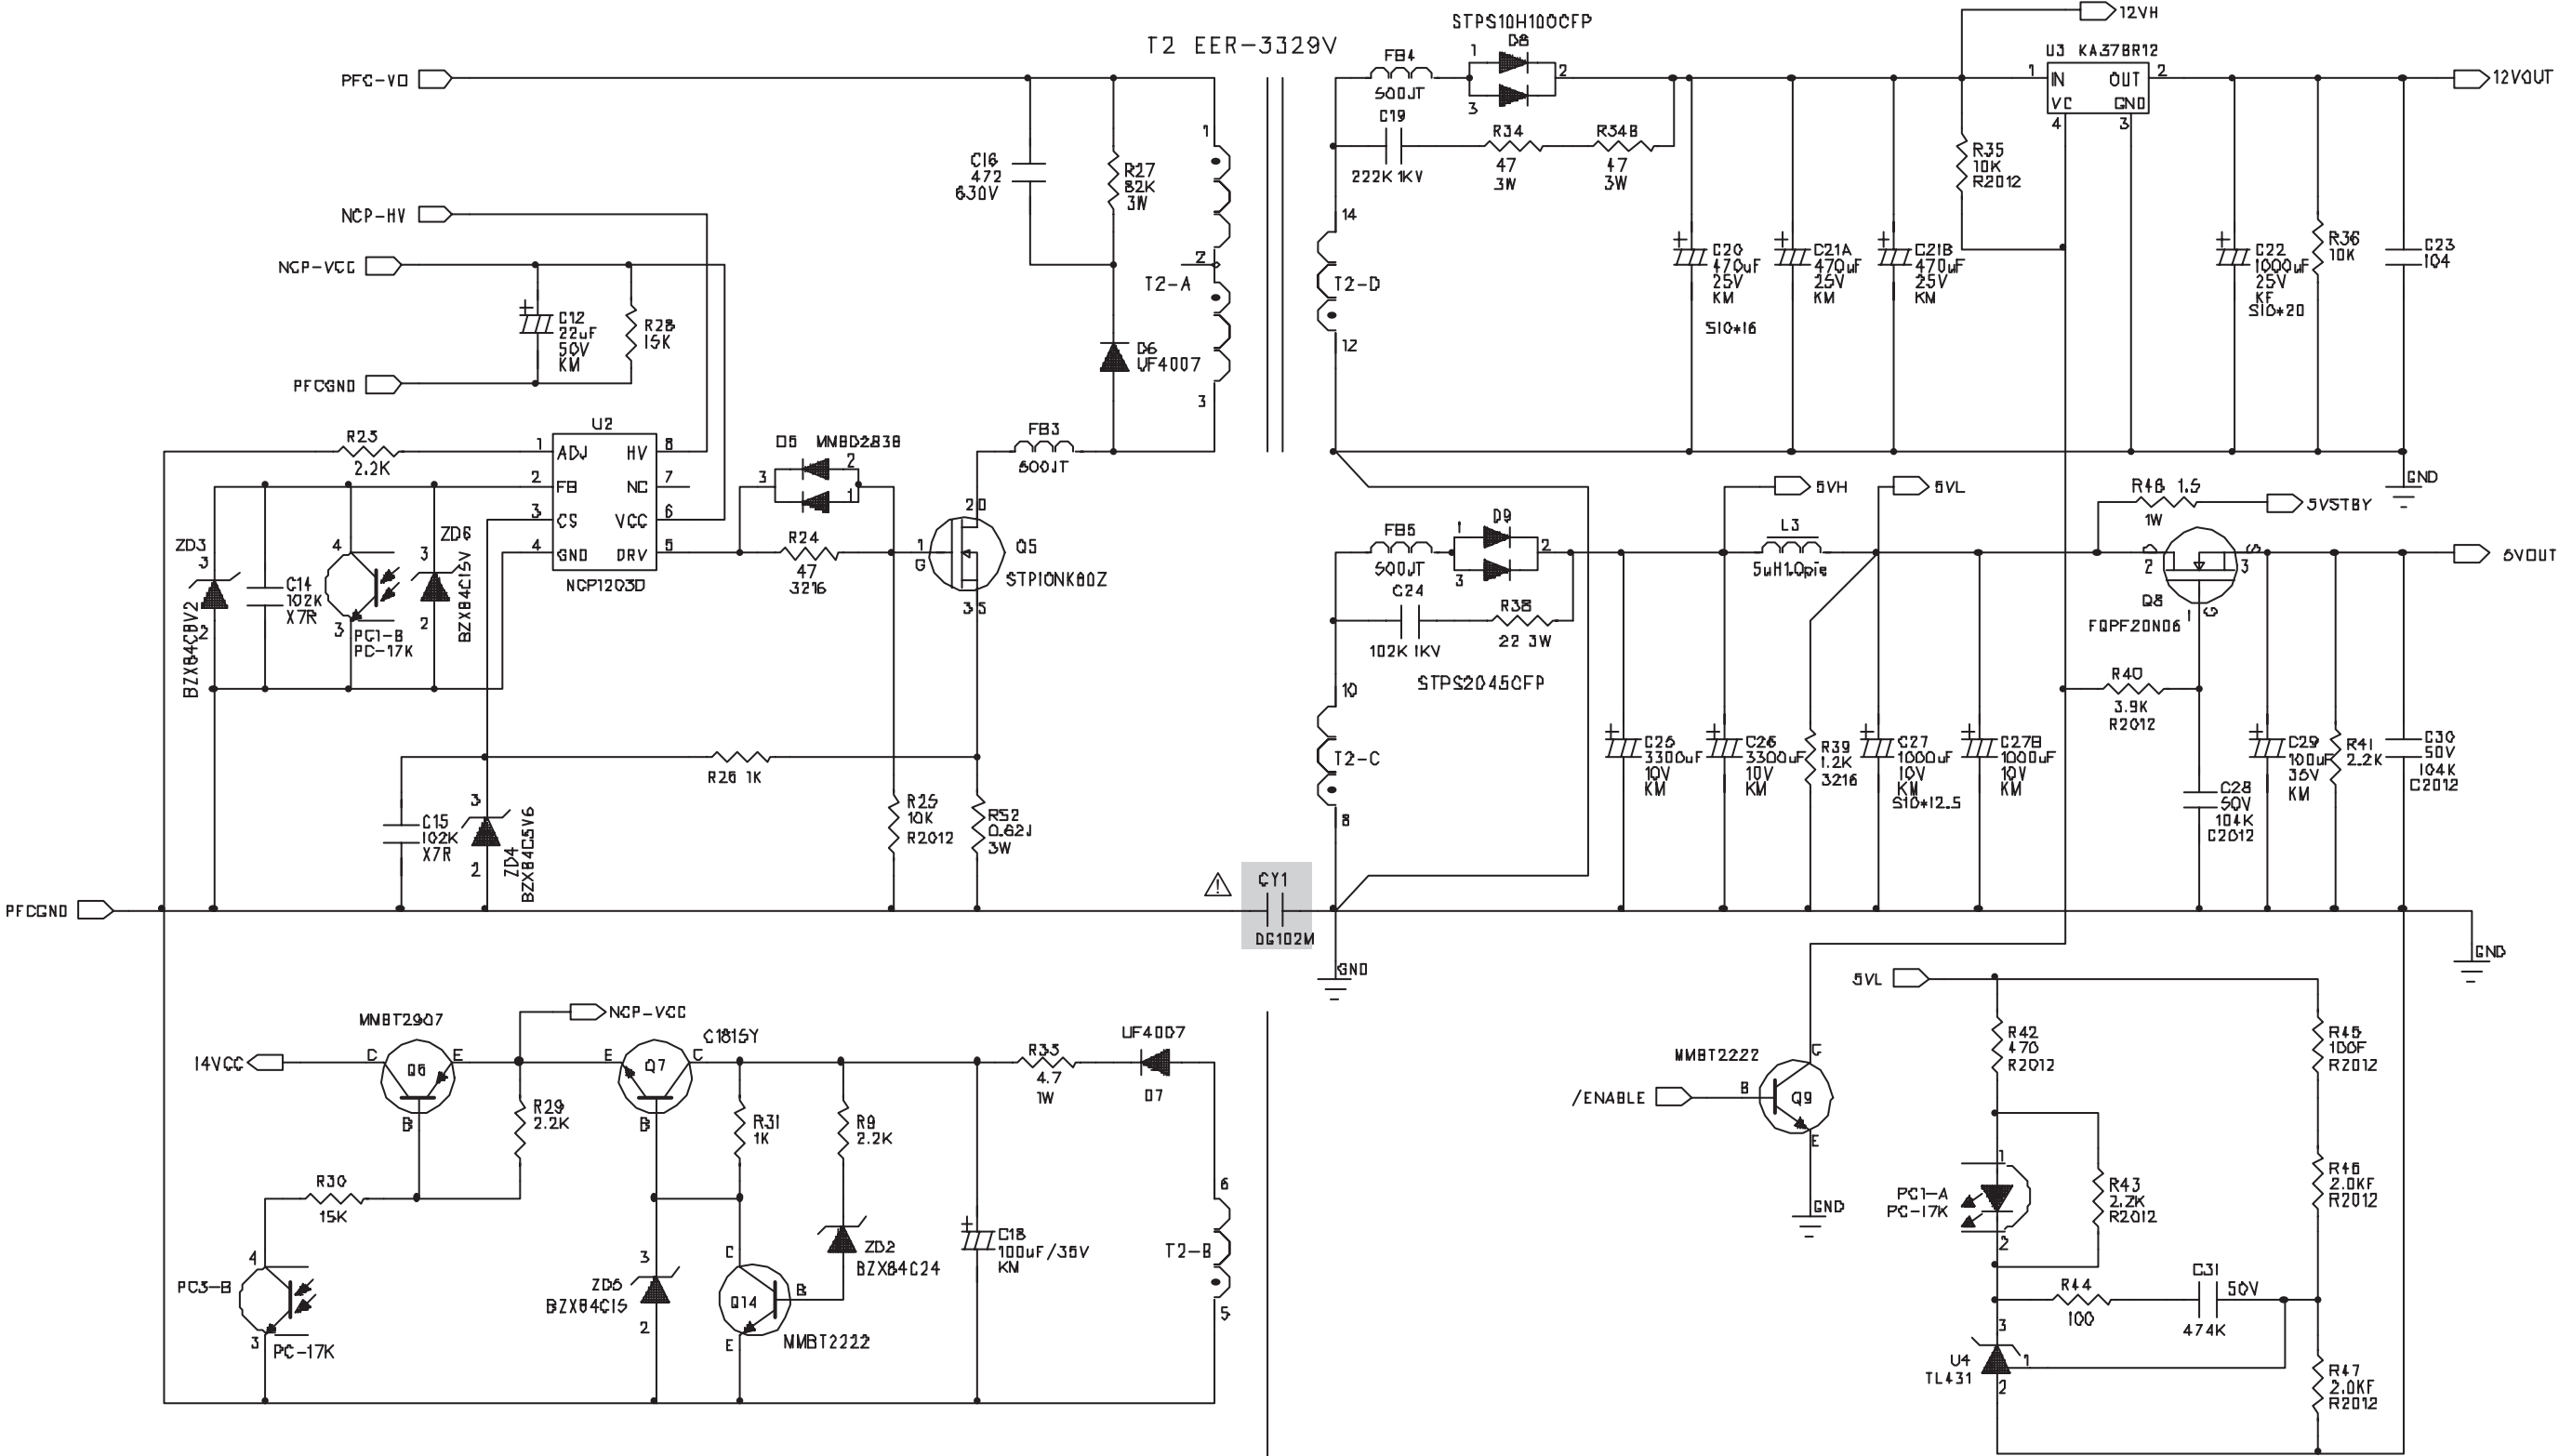


POWER PWB ASS'Y (2/3)  
QAL0826-001

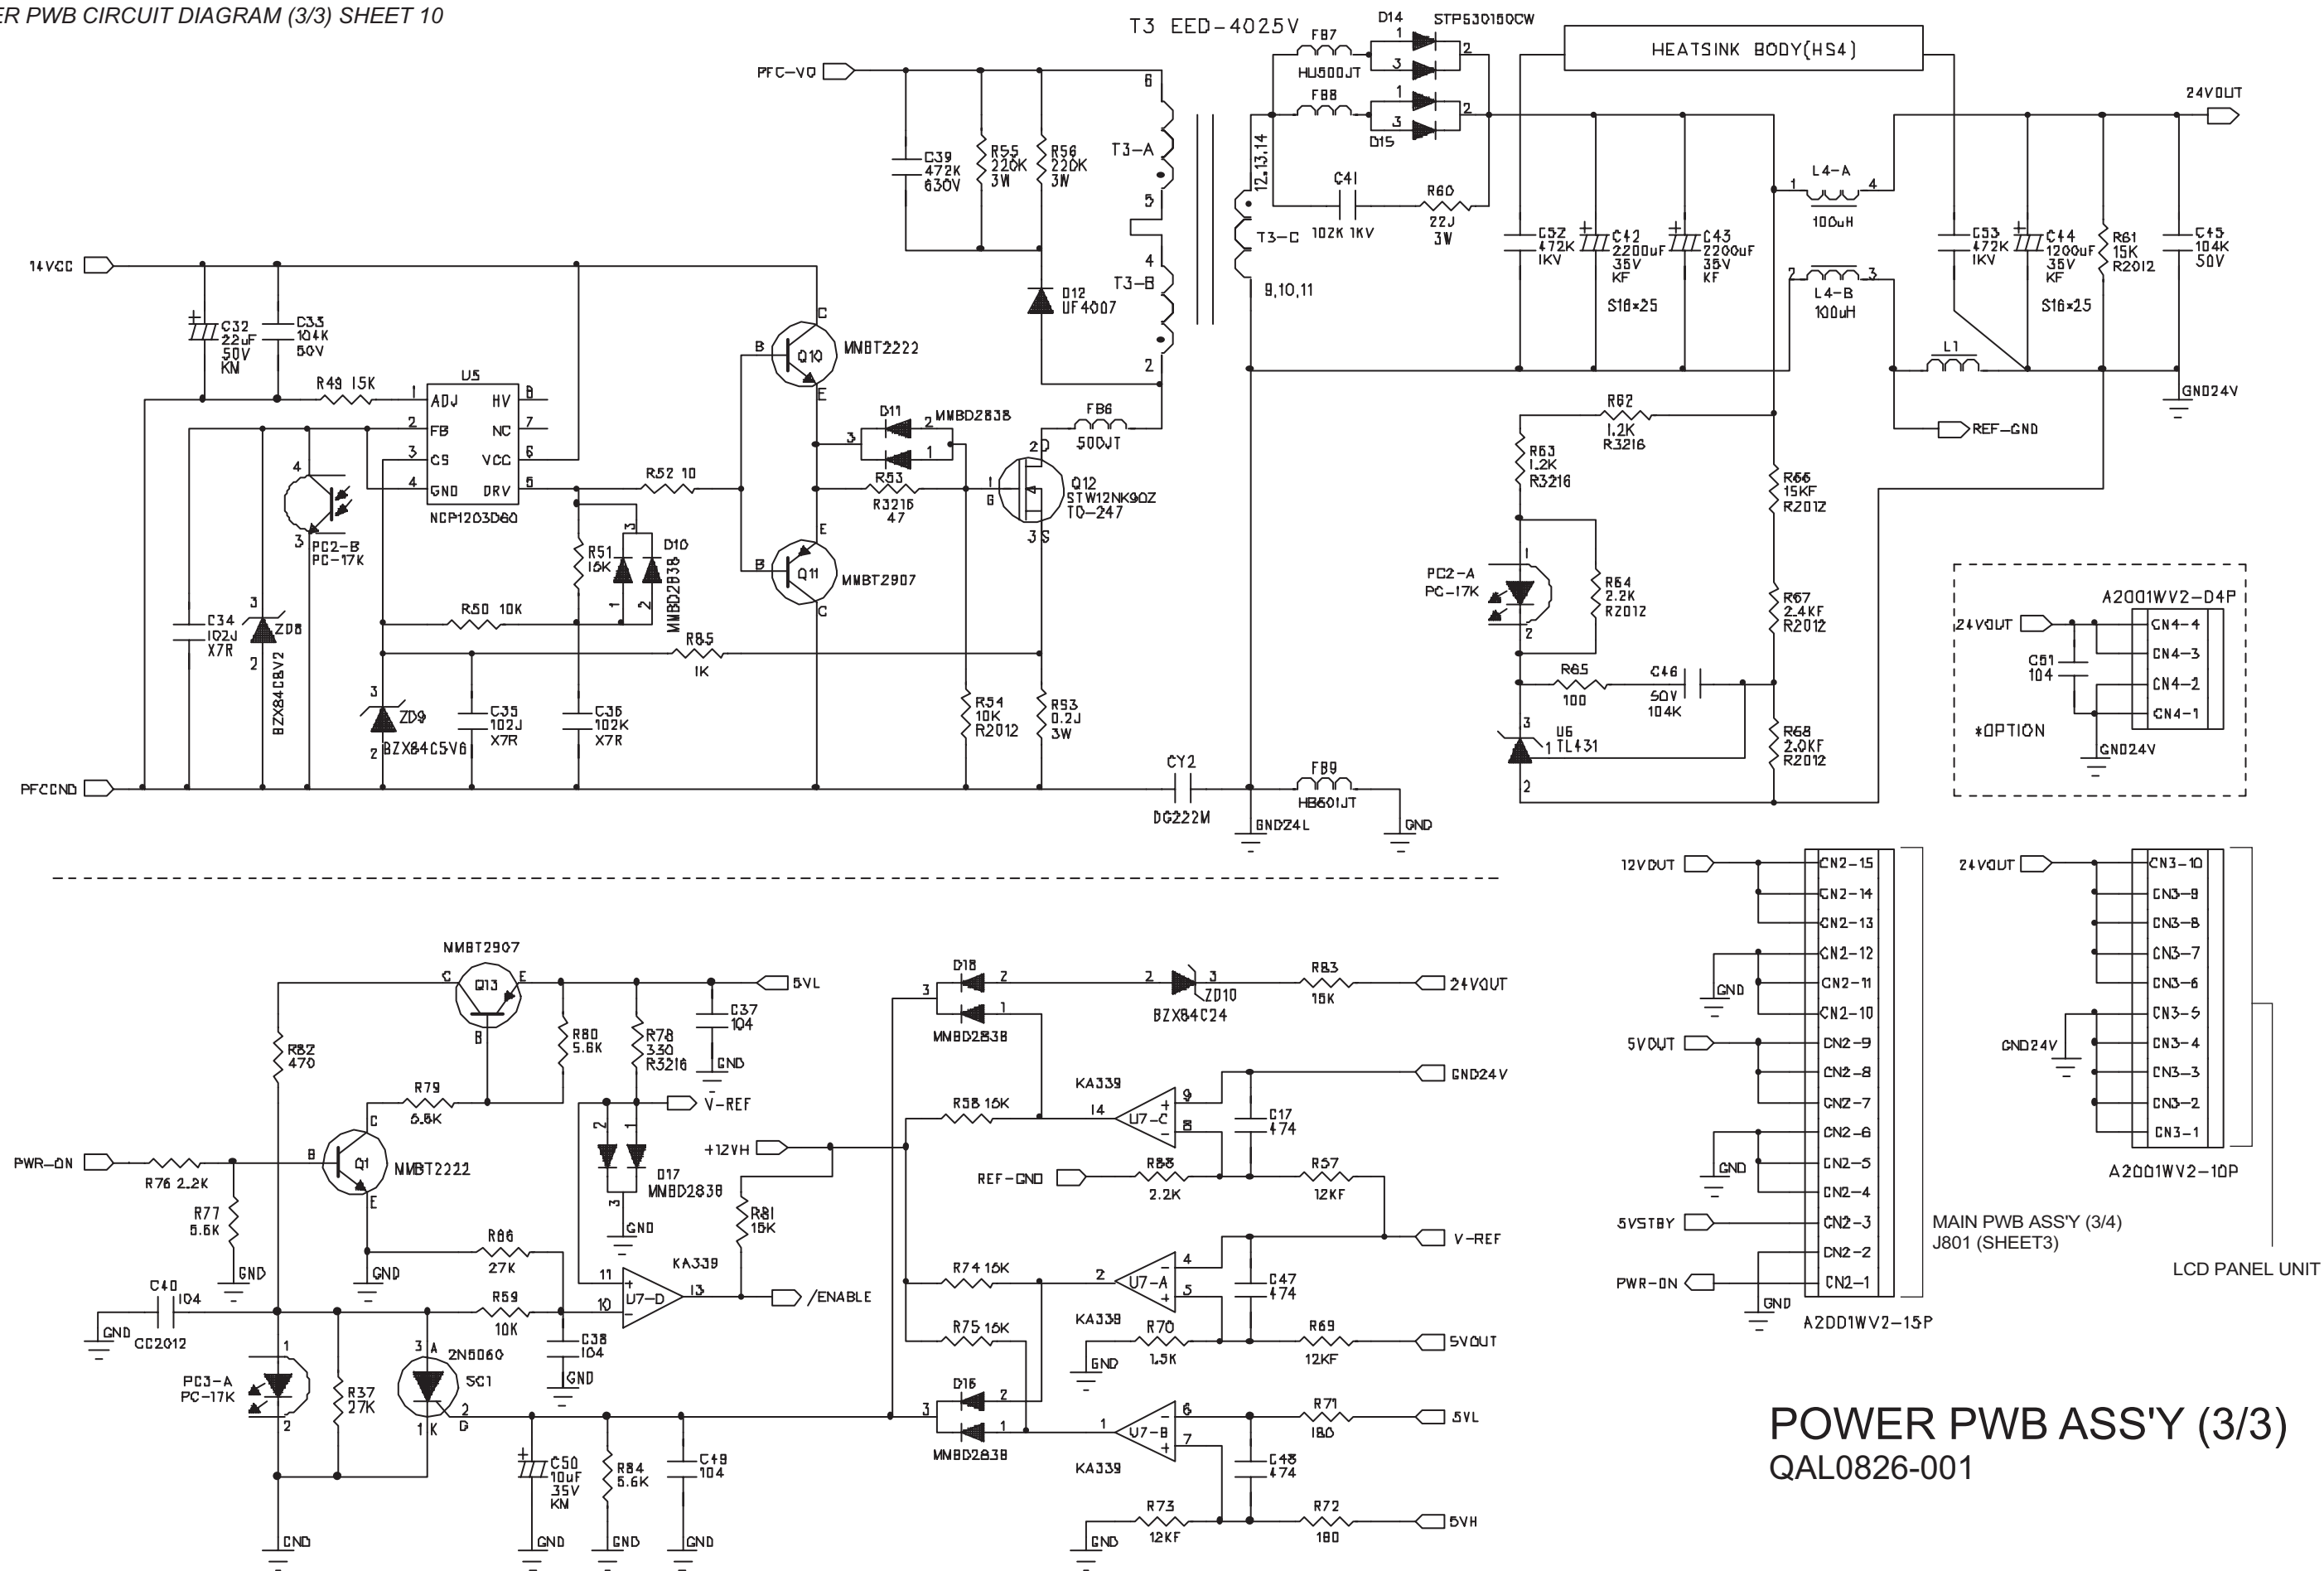


POWER PWB ASS'Y (3/3)  
QAL0826-001

**PATTERN DIAGRAMS**  
MAIN PWB PATTERN [SOLDER SIDE]

TOP  
↑

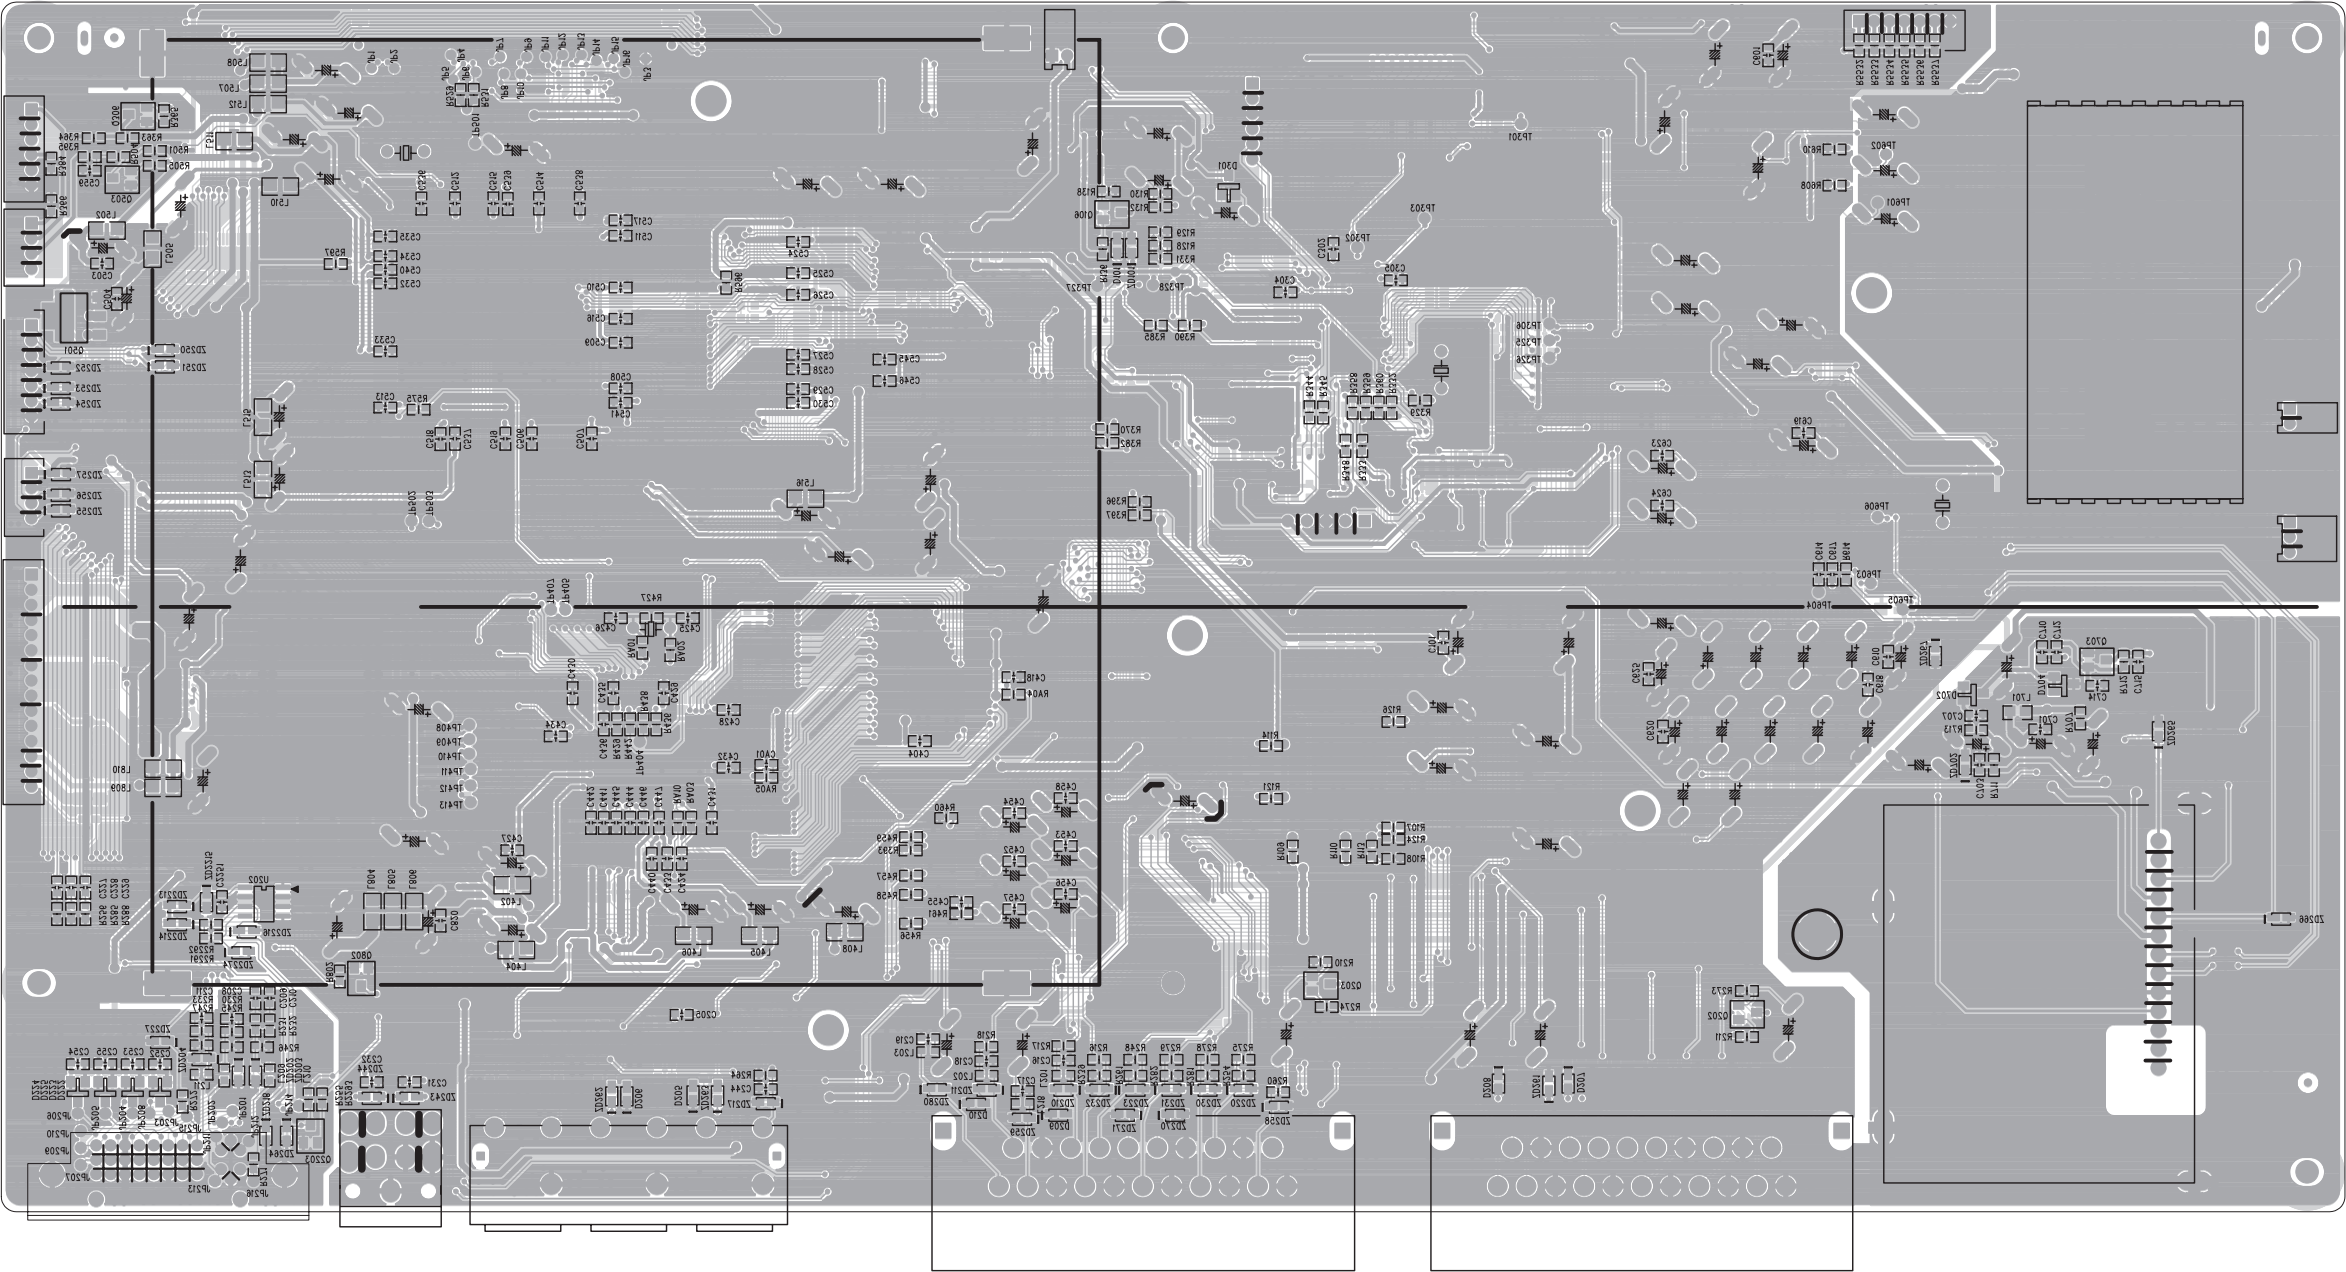




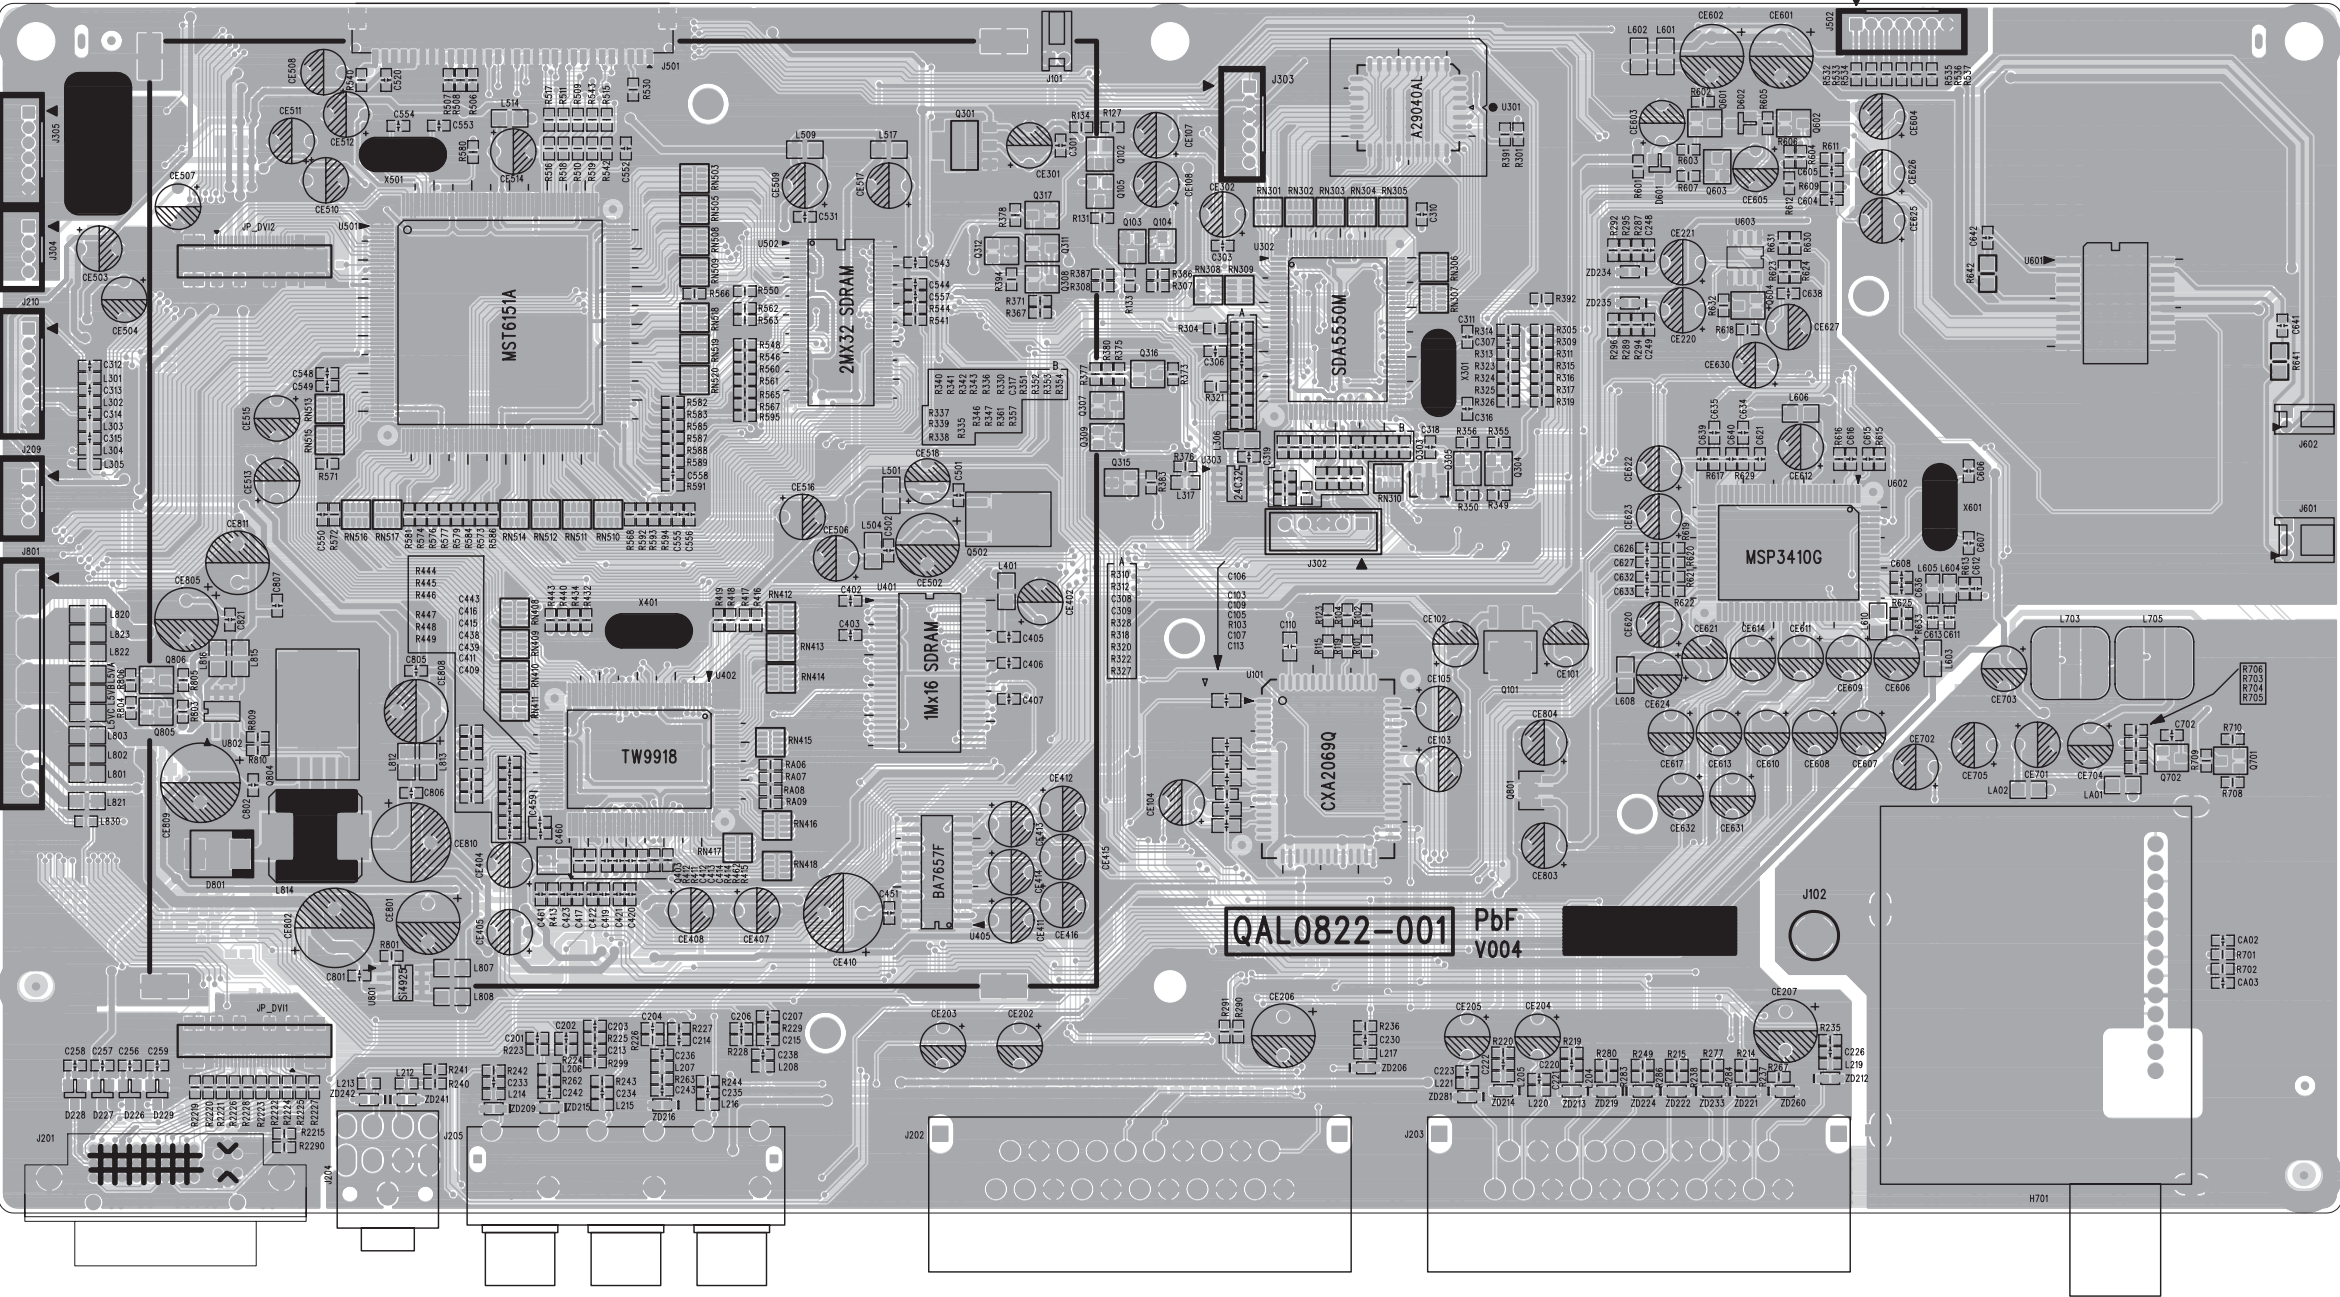


TOP  
↑


POWER PWB PATTERN [SOLDER SIDE]

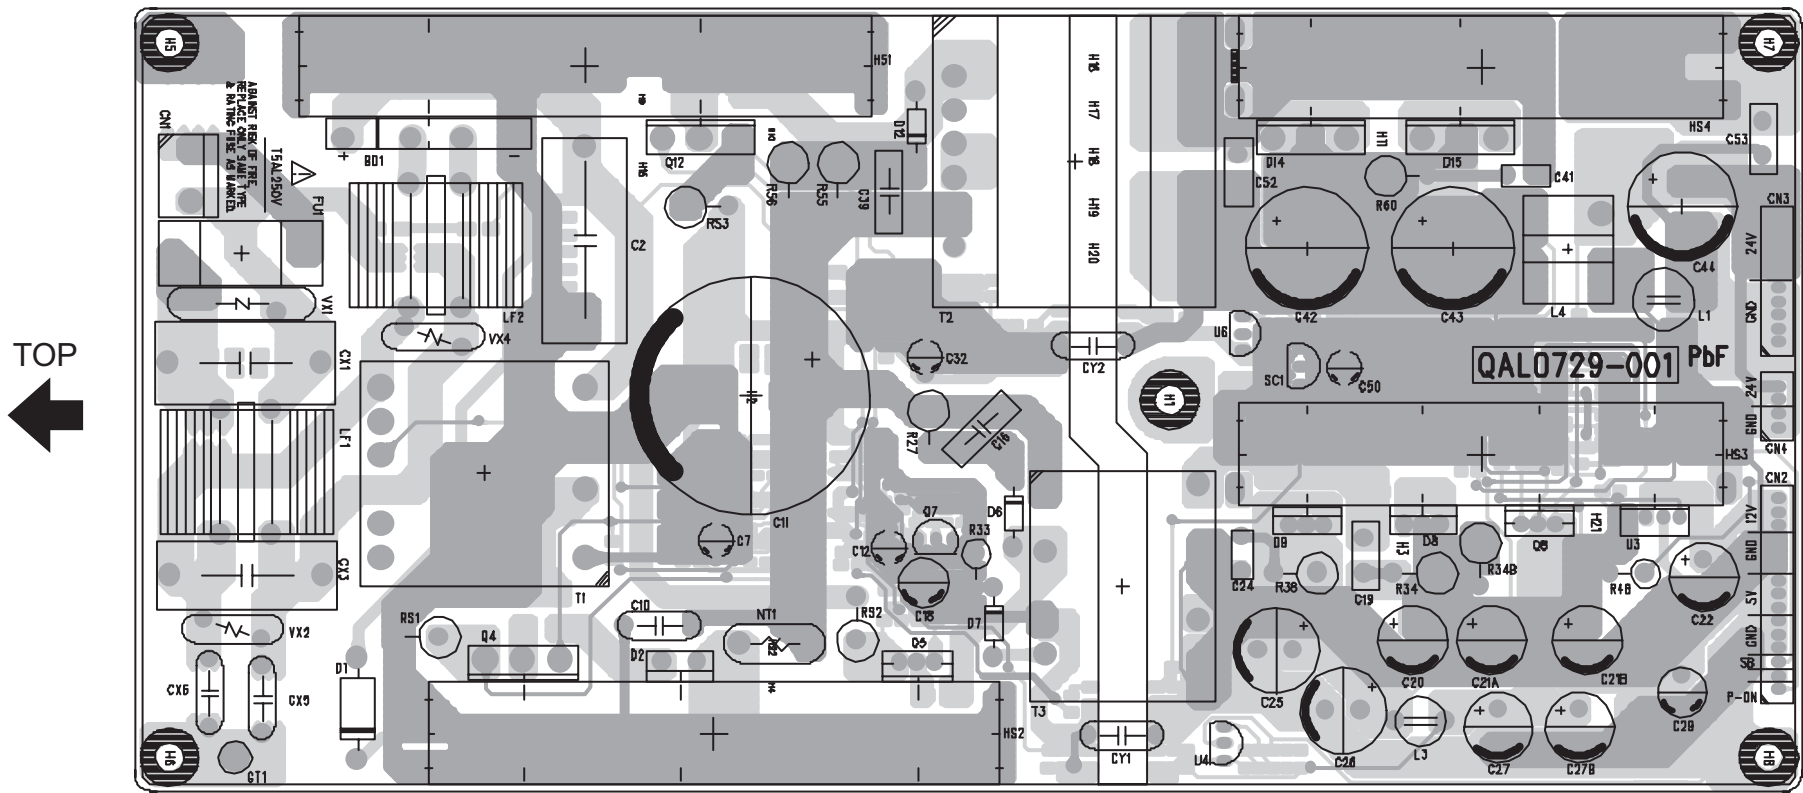


POWER PWB PATTERN [PARTS SIDE]

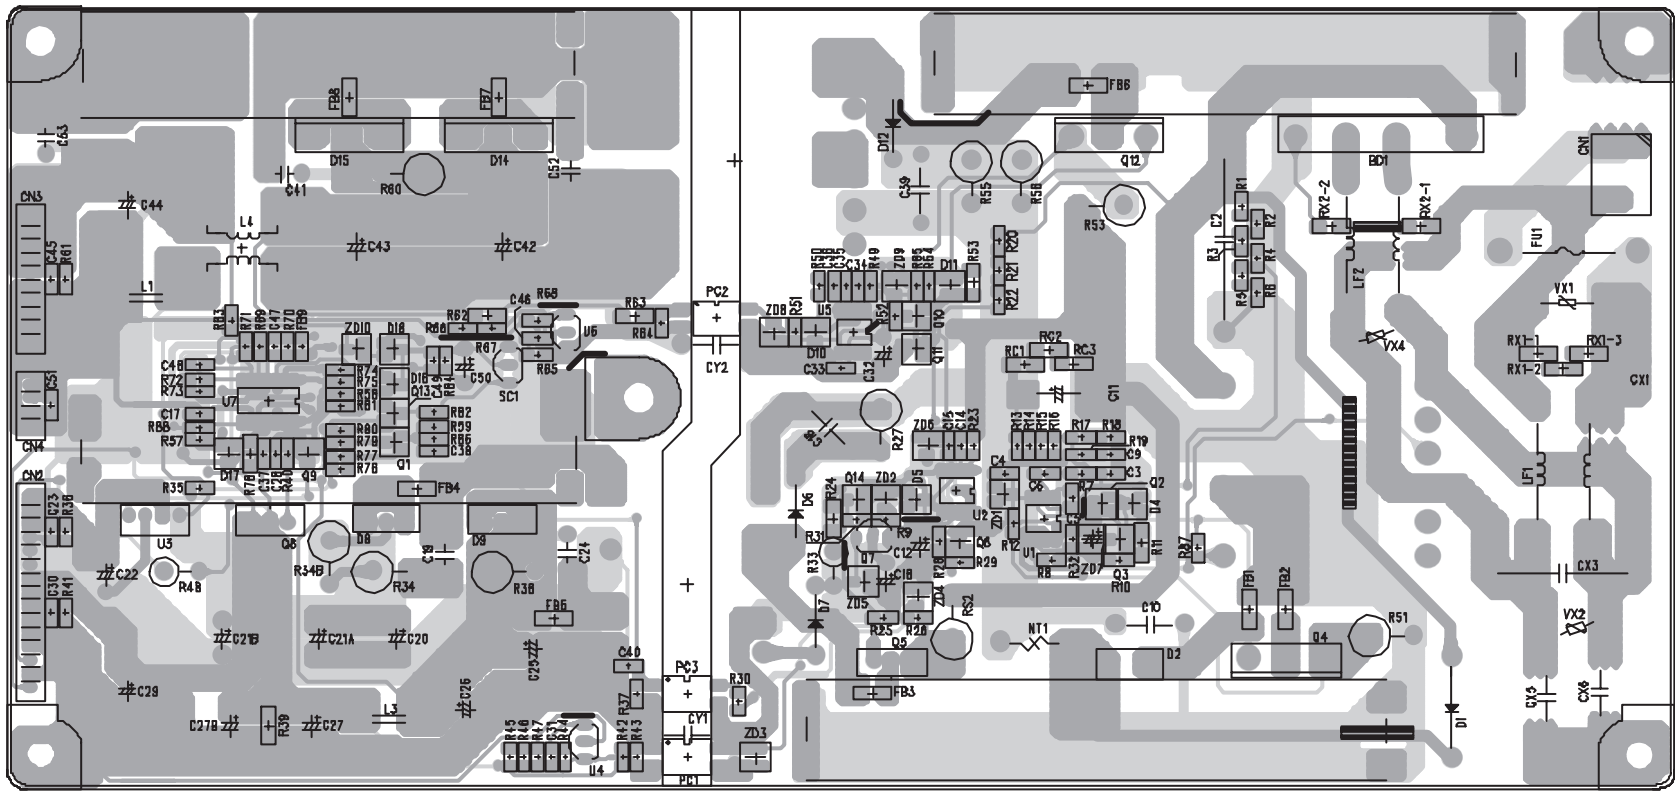


# KEY PWB PATTERN [SOLDER SIDE]

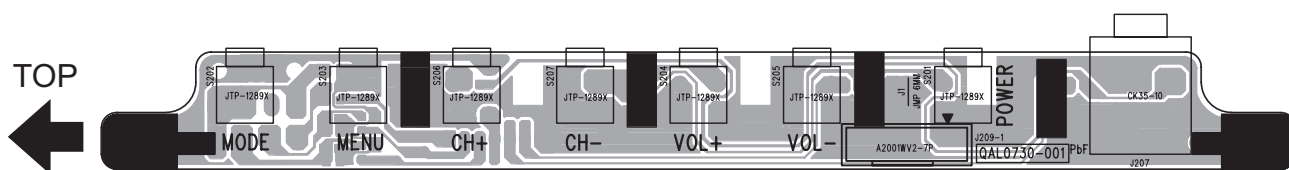


# KEY PWB PATTERN [PARTS SIDE]

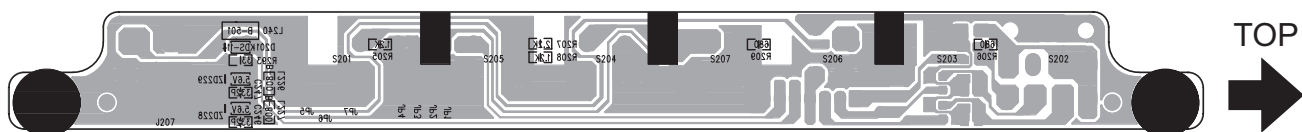

# LED PWB PATTERN [SOLDER SIDE]

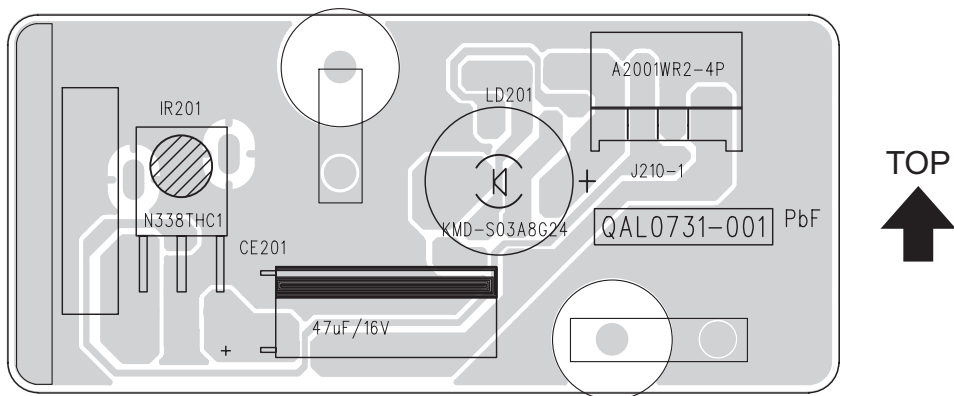

# LED PWB PATTERN [PARTS SIDE]

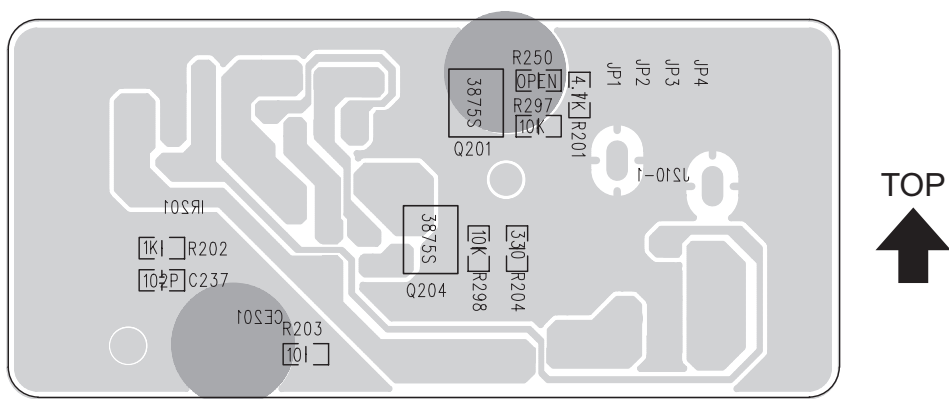

# VOLTAGE CHARTS


<MAIN PWB>

MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)	MODE PIN NO.	DC (V)			
U101		23	0.3	87	0	23	2.2	120	0	63	1.7	160	1.0	48	0.3	37	3.7	Q202		Q703		U7												
1	3.9	24	2.4	88	1.5	24	0	121	1.0	64	0	161	1.3	49	3.2	38	7.0	E	3.6	E	0	1	0											
2	4.4	25	2.5	89	1.7	25	1.6	122	1.3	65	0	162	3.2	50	0.2	39	8.0	C	8.9	C	4.6	2	0											
3	3.9	26	0	90	2.5	26	3.2	123	1.0	66	3.2	163	0	51	0.4	40	7.0	B	4.6	B	0.3	3	13.6											
4	4.4	27	4.8	91	0	27	0	124	1.2	67	0	164	1.2	52	0	41	0	Q203		Q801		4	0.6											
5	4.4	28	4.9	92	3.2	28	0.6	125	0.9	68	2.2	165	1.2	53	0.3	42	0	E	2.7	1	8.0	5	0.5											
6	0	29	0	93	1.6	29	1.0	126	0.8	69	0	166	1.1	54	0.3	43	0	C	8.9	2	0	6	5.0											
7	4.8	30	0	94	1.6	30	1.0	127	0.9	70	3.3	167	1.3	55	3.2	44	0	B	3.4	3	12.0	7	45.0											
8	3.9	31	0.2	95	0	31	1.7	128	3.2	71	3.3	168	1.1	56	0.3	45	3.7	Q301		Q802		8	0											
9	4.4	32	0.2	96	1.4	32	1.0	U405		72	0	169	1.3	57	0	46	0	1	0	E	0	9	0											
10	3.9	U302		97	1.7	33	1.0	1	3.4	73	0	170	1.1	58	0	47	3.7	2	3.3	C	0	10	2.1											
11	4.4	1	1.7	98	1.3	34	1.0	2	0	74	0	171	1.3	59	0	48	3.7	3	4.8	B	0.7	11	0.6											
12	4.4	2	1.4	99	0.8	35	1.3	3	3.4	75	3.3	172	0	60	1.0	49	0	Q303		Q804		12	0											
13	0	3	0.8	100	1.3	36	1.8	4	0	76	2.3	173	1.7	61	1.0	50	3.7	1	3.3	1	4.8	13	0											
14	4.8	4	0.7	U303		37	0.6	5	3.4	77	3.1	174	0	62	1.0	51	3.7	2	0	2	3.4	14	0											
15	3.8	5	0	1	0	38	3.2	6	0	78	1.7	175	0	63	0.9	52	0	3	3.3	3	0	Q1												
16	4.4	6	2.5	2	0	39	0	7	0	79	1.7	176	0	64	1.2	53	3.7	Q304		4	3.2	E	0											
17	3.9	7	0	3	0	40	0.6	8	0	80	0	177	0	65	0	54	3.7	S	3.2	5	0	C	0											
18	4.4	8	3.3	4	0	41	0.5	9	0	81	0	178	0	66	0	55	0	D	2.1	Q805		B	0.6											
19	4.5	9	0	5	3.2	42	0.6	10	0	82	0.2	179	0	67	2.5	56	3.7	G	2.8	E	0	Q2												
20	0	10	0	6	3.3	43	0.6	11	0	83	0.3	180	0	68	1.3	57	3.7	Q305		C	4.1	E	5.2											
21	4.8	11	0	7	0	44	0.5	12	0	84	0.2	181	0	69	0	58	2.6	S	3.3	B	0	C	14.1											
22	3.9	12	3.3	8	4.8	45	0.5	13	0	85	0.4	182	3.2	70	0	59	0	D	1.5	Q806		B	5.0											
23	4.4	13	0	U401		46	3.2	14	0	86	2.5	183	0	71	0	60	3.8	G	2.0	E	0	Q3												
24	3.9	14	0	1	3.2	47	0	15	1.9	87	0	184	0	72	0	61	0	Q306		C	0	E	5.2											
25	4.4	15	0	2	1.2	48	2.4	16	2.5	88	0.3	185	1.7	73	0	62	0	E	0	B	0.5	C	0											
26	4.4	16	0	3	1.1	49	2.4	17	0	89	0.4	186	0	74	0.3	63	0	C	4.0	Q2203		B	5.0											
27	0	17	3.3	4	0	50	2.3	18	2.3	90	0.3	187	0	75	3.2	64	0	B	0	E	0	Q4												
28	4.8	18	3.3	5	1.1	51	2.4	19	1.9	91	0.3	188	0	76	0.3	65	4.7	Q307		C	3.3	S	0											
29	4.2	19	0	6	1.0	52	2.4	20	4.7	92	0.6	189	0	77	0.4	66	4.7	E	0	B	0	D	202.6											
30	3.9	20	0	7	3.2	53	2.4	21	1.9	93	0.4	190	0	78	0	67	1.5	C	0	H701		G	4.5											
31	4.4	21	0.7	8	1.1	54	1.6	22	0	94	0.4	191	0	79	0.4	68	1.5	B	2.6	5	0	Q5												
32	0	22	2.5	9	0	55	0	23	0	95	0.3	192	0	80	0.7	69	0	Q308		6	0	S	0											
33	2.9	23	0	10	0	56	2.9	24	0	96	0.4	193	0	81	3.2	70	0	E	0	7	0	D	386.1											
34	2.1	24	0	11	0.8	57	1.3	U501		97	0.3	194	0	82	0.2	71	2.2	C	3.3	8	3.6	G	1.2											
35	0	25	3.0	12	0.7	58	2.0	1	0	98	0.4	195	1.7	83	0.4	72	2.2	B	-0.2	9	0	Q6												
36	0	26	3.0	13	3.1	59	1.1	2	0	99	0.3	196	0	84	0	73	0	Q309		10	2.8	E	14.2											
37	4.4	27	0	14	0	60	0	3	3.2	100	0	197	0	85	0.3	74	2.4	E	0.1	11	2.1	C	14.1											
38	4.4	28	0	15	2.9	61	1.4	4	3.2	101	0	198	0	86	0	75	0	C	2.0	12	4.6	B	13.5											
39	3.7	29	2.9	16	2.9	62	1.5	5	3.2	102	2.5	199	0	U601		76	0	B	0	13	0	Q7												
40	4.5	30	3.1	17	2.9	63	1.4	6	3.2	103	0	200	0.3	1	0	77	0	Q311		14	5.7	E	14.2											
41	4.6	31	3.3	18	2.6	64	0.2	7	0	104	1.8	201	1.6	2	6.1	78	0	E	0	15	2.4	C	15.4											
42	8.9	32	3.3	19	1.6	65	0.3	8	3.2	105	2.5	202	1.6	3	0	79	0	C	3.3	16	2.0	B	14.9											
43	4.5	33	0	20	0.5	66	0.3	9	0	106	1.4	203	1.3	4	0	80	3.3	B	0	17	1.5	Q8												
44	3.5	34	3.1	21	0.1	67	0.2	10	3.2	107	1.3	204	3.2	5	6.0	U603		Q315		S		13.6												
45	4.5	35	3.3	22	0.1	68	0.9	11	0	108	0	205	0	6	12.0	1	0	E	0.7	D		5.0												
46	3.6	36	3.3	23	0.4	69	0	12	3.2	109	3.2	206	0	7	1.5	2	0	C	0	G		4.8												
47	4.4	37	3.3	24	1.1	70	3.2	13	0	110	1.2	207	3.2	8	4.8	3	0	B	0	Q9														
48	0	38	0	25	3.2	71	0	14	2.1	111	1.4	208	3.2	9	2.4	4	0	Q316		IR201		E	0											
49	3.9	39	0	26	0	72	0	15	0	112	0	U502		10	0	5	0	E	4.4	IR	3.1	C	13.6											
50	4.4	40	3.3	27	1.1	73	3.2	16	0	113	2.5	1	3.2	11	0	6	0	C	2.8	VC	4.8	B	0											
51	4.4	41	2.5	28	1.1	74	1.2	17	3.2	114	0	2	0.4	12	0	7	0	B	0	G	0	Q10												
52	4.4	42	3.3	29	1.1	75	0.1	18	0.2	115	2.0	3	3.2	13	0	8	0.3	Q317		Q201		E	1.9											
53	4.4	43	1.2	30	1.1	76	0.2	19	2.1	116	2.4	4	0.3	14	1.5	U801		E	0	E	0	C	14.1											
54	4.5	44	2.1	31	0.5	77	1.2	20	0	117	0.2	5	0.3	15	12.0	1	12.0	C	0	C	1.8	B	2.0											
55	3.7	45	3.3	32	0.5	78	1.1	21	0.3	118	1.0	6	0	16	6.0	2	0	B	2.5	B	0	Q11												
56	2.9	46	3.3	33	0	79	1.9	22	0	119	0.2	7	0.4	17	0	3	12.0	Q403		Q204		E	1.9											
57	0	47	2.5	34	3.2	80	0																											


# WAVEFORMS

MAIN PWB (1/4)  
(SHEET1)


U302-21




U302-29




U302-30




U302-52




U302-53




U402-15




U402-16




U402-19



U402-20




U402-61




MAIN PWB (2/4)  
(SHEET2)


U501-51




U501-53




U501-77




U501-202




U501-203



U602-71




U602-72




MAIN PWB (3/4)  
(SHEET3)


U101-41




U101-44



U101-53




U101-63



MAIN PWB (4/4)  
(SHEET4)

H701-17









Victor Company of Japan, Limited  
Flat Panel Display Category 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama-city, Kanagawa-prefecture, 221-8528, Japan

(No.YA369)



Printed in Japan  
VPT

# PARTS LIST

## CAUTION

- The parts identified by the  $\Delta$  symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.

### ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

RESISTORS		CAPACITORS	
CR	Carbon Resistor	C CAP.	Ceramic Capacitor
FR	Fusible Resistor	E CAP.	Electrolytic Capacitor
PR	Plate Resistor	M CAP.	Mylar Capacitor
VR	Variable Resistor	CH CAP.	Chip Capacitor
HV R	High Voltage Resistor	HV CAP.	High Voltage Capacitor
MF R	Metal Film Resistor	MF CAP.	Metalized Film Capacitor
MG R	Metal Glazed Resistor	MM CAP.	Metalized Mylar Capacitor
MP R	Metal Plate Resistor	MP CAP.	Metalized Polystyrol Capacitor
OM R	Metal Oxide Film Resistor	PP CAP.	Polypropylene Capacitor
CMF R	Coating Metal Film Resistor	PS CAP.	Polystyrol Capacitor
UNF R	Non-Flammable Resistor	TF CAP.	Thin Film Capacitor
CH V R	Chip Variable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH MG R	Chip Metal Glazed Resistor	TAN. CAP.	Tantalum Capacitor
COMP. R	Composition Resistor	CH C CAP.	Chip Ceramic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
		CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

RESISTORS									
F	G	J	K	M	N	R	H	Z	P
±1%	±2%	±5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

# CONTENTS

<b>USING P.W. BOARD &amp; REMOTE CONTROL UNIT .....</b>	<b>3-3</b>
<b>EXPLODED VIEW PARTS LIST .....</b>	<b>3-4</b>
<b>EXPLODED VIEW .....</b>	<b>3-5</b>
 <b>PRINTED WIRING BOARD PARTS LIST [LT-26A61BJ, LT-26A61BU, LT-26A61BU/C, LT-26A61SU/C] .....</b>	 <b>3-6</b>
MAIN P.W. BOARD ASS'Y (QAL0823-001) .....	3-6
POWER P.W. BOARD ASS'Y (QAL0826-001) .....	3-10
LED P.W. BOARD ASS'Y (QAL0827-001) .....	3-12
KEY P.W. BOARD ASS'Y (QAL0828-001) .....	3-12
 <b>PRINTED WIRING BOARD PARTS LIST [LT-26A61SJ, LT-26A61SU] .....</b>	 <b>3-13</b>
MAIN P.W. BOARD ASS'Y (QAL0822-001) .....	3-13
POWER P.W. BOARD ASS'Y (QAL0826-001) .....	3-17
LED P.W. BOARD ASS'Y (QAL0827-001) .....	3-17
KEY P.W. BOARD ASS'Y (QAL0828-001) .....	3-17
 <b>PRINTED WIRING BOARD PARTS LIST [LT-32A61BJ, LT-32A61BU, LT-32A61SU/C] .....</b>	 <b>3-18</b>
MAIN P.W. BOARD ASS'Y (QAL0825-001) .....	3-18
POWER P.W. BOARD ASS'Y (QAL0826-001) .....	3-22
LED P.W. BOARD ASS'Y (QAL0827-001) .....	3-22
KEY P.W. BOARD ASS'Y (QAL0828-001) .....	3-22
 <b>PRINTED WIRING BOARD PARTS LIST [LT-32A61BU/C, LT-32A61SJ, LT-32A61SU] .....</b>	 <b>3-23</b>
MAIN P.W. BOARD ASS'Y (QAL0824-001) .....	3-23
POWER P.W. BOARD ASS'Y (QAL0826-001) .....	3-27
LED P.W. BOARD ASS'Y (QAL0827-001) .....	3-27
KEY P.W. BOARD ASS'Y (QAL0828-001) .....	3-27
<b>REMOTE CONTROL UNIT PARTS LIST (RM-C1816S-2C) .....</b>	<b>3-28</b>
<b>PACKING .....</b>	<b>3-28</b>
<b>PACKING PARTS LIST .....</b>	<b>3-28</b>

## USING P.W. BOARD & REMOTE CONTROL UNIT

P.W.B ASS'Y name	P.W.B ASS'Y No.					
	LT-26A61BJ	LT-26A61BU	LT-26A61BU/C	LT-26A61SJ	LT-26A61SU	LT-26A61SU/C
MAIN P.W.B	QAL0823-001	←	←	QAL0822-001	←	QAL0823-001
POWER P.W.B	QAL0826-001	←	←	←	←	←
LED P.W.B	QAL0827-001	←	←	←	←	←
KEY P.W.B	QAL0828-001	←	←	←	←	←
REMOTE CONTROL UNIT	RM-C1816S-2C	←	←	←	←	←


P.W.B ASS'Y name	P.W.B ASS'Y No.					
	LT-32A61BJ	LT-32A61BU	LT-32A61BU/C	LT-32A61SJ	LT-32A61SU	LT-32A61SU/C
MAIN P.W.B	QAL0825-001	←	QAL0824-001	←	←	QAL0825-001
POWER P.W.B	QAL0826-001	←	←	←	←	←
LED P.W.B	QAL0827-001	←	←	←	←	←
KEY P.W.B	QAL0828-001	←	←	←	←	←
REMOTE CONTROL UNIT	RM-C1816S-2C	←	←	←	←	←

# EXPLODED VIEW PARTS LIST

Please note that the TUNER is not included in the MAIN PWB.

△	Ref.No.	Part No.	Part Name	Description	Local
△	101	LC12342-006A-U	TERMINAL COVER		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
△	101	LC12342-005A-U	TERMINAL COVER		LT-26A61SJ,LT-26A61SU,LT-26A61SU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	102	LC42230-004A-C	STAND ASSY		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
	102	LC42230-003A-C	STAND ASSY		LT-26A61SJ,LT-26A61SU,LT-32A61SJ,LT-32A61SU
	102	GA10161-001A-U	STAND ASSY		LT-26A61SU/C,LT-32A61SU/C
	103	GA30080-002A-U	STAND COVER		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
	103	GA30080-001A-U	STAND COVER		LT-26A61SJ,LT-26A61SU,LT-26A61SU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	104	GA30081-002A-U	CABLE COVER		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
	104	GA30081-001A-U	CABLE COVER		LT-26A61SJ,LT-26A61SU,LT-26A61SU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	105	QYSDSP4008MA	SCREW	M4 x 8mm(x4)	
	106	QYSPSPD5020ZA	SCREW	M5 x 20mm(x4)	
△	107	LC12341-006A-U	REAR COVER		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C
△	107	LC12341-005A-U	REAR COVER		LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
△	107	LC12396-006A-U	REAR COVER		LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
△	107	LC12396-005A-U	REAR COVER		LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	108	QYSBSF4012ZA	TAP SCREW	M4 x 12mm(x8)	
	109	LC42446-001A	SCREW		LT-26A61BJ,LT-26A61SU/C,LT-32A61BJ,LT-32A61SU/C
	109	LC42063-001A	SCREW		LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU
	110	LC42446-001A	SCREW	(x2)	LT-26A61BJ,LT-26A61SU/C,LT-32A61BJ,LT-32A61SU/C
	110	LC42063-001A	SCREW	(x2)	LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU
△	111	QMPN260-170-JC	POWER CORD(EK)	1.7m BLACK	LT-26A61BJ,LT-26A61SJ,LT-32A61BJ,LT-32A61SJ
△	111	QMPK300-170-JC	POWER CORD(EU)	1.7m BLACK	LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU
	112	QQR0491-002	FERRITE CORE		
	113	QQR0491-001	FERRITE CORE		LT-32A61BJ,LT-32A61BU,LT-32A61SU,LT-32A61SU/C
	114	LC42388-001B	CONN ACCESSORY	(x2)	LT-26A61BJ,LT-26A61SU/C,LT-32A61BJ,LT-32A61SU/C
	114	LC42388-001A	CONN ACCESSORY	(x2)	LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ
	114	QNB0036-001	CONN ACCESSORY	(x2)	LT-32A61BU,LT-32A61SU
	115	QQR0491-001	FERRITE CORE	(x2)	
	116	QQR0490-001	NOISE FILTER	(x4)	LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
	117	QQR0491-001	FERRITE CORE		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
△	118	LC12387-004A-U	TERMINAL BASE		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
△	118	LC12387-003A-U	TERMINAL BASE		LT-26A61SJ,LT-26A61SU,LT-26A61SU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	119	QYSBSF3010ZA	TAP SCREW	M3 x 10mm	
	120	LC42301-001A	SCREW	(x4)	
△	121	QLD0408-001-JUK	LCD PANEL UNIT		LT-26A61BJ,LT-26A61BU,LT-26A61SU/C
△	121	QLD0370-002-JUK	LCD PANEL UNIT		LT-26A61BU/C,LT-26A61SJ,LT-26A61SU
△	121	QLD0409-001-JUK	LCD PANEL UNIT		LT-32A61BJ,LT-32A61BU,LT-32A61SU/C
△	121	QLD0371-001-JUK	LCD PANEL UNIT		LT-32A61BU/C,LT-32A61SJ,LT-32A61SU
	122	LC42239-001A-C	SPEAKER ASSY	LEFT	LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
	122	LC42239-003A-C	SPEAKER ASSY	LEFT	LT-32A61BJ,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	123	LC42239-002A-C	SPEAKER ASSY	RIGHT	LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
	123	LC42239-004A-C	SPEAKER ASSY	RIGHT	LT-32A61BJ,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	124	LC40226-005A-H	SPACER	(x6)	
	125	LC12467-001A-U	KNOB BASE		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
	125	LC12467-002A-U	KNOB BASE		LT-26A61SJ,LT-26A61SU,LT-26A61SU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
△	126	LC12340-006A-U	FRONT PANEL		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C
△	126	LC12340-005A-U	FRONT PANEL		LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
△	126	LC12395-006A-U	FRONT PANEL		LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
△	126	LC12395-005A-U	FRONT PANEL		LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	127	LC41852-001A	JVC MARK ASSY		
	128	LC42247-001D	LED PLATE		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-32A61BJ,LT-32A61BU,LT-32A61BU/C
	128	LC42247-002B	LED PLATE		LT-26A61SJ,LT-26A61SU,LT-26A61SU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	129	WJW0027-001A-E	DIGITAL(LVDS) CABLE		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
	129	WJW0027-002A-E	DIGITAL(LVDS) CABLE		LT-32A61BJ,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
	130	QAU0459-001	TUNER		
△	201	QAL0826-001	POWER PWB		
△	202	QAL0822-001	MAIN PWB		LT-26A61SJ,LT-26A61SU
△	202	QAL0823-001	MAIN PWB		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SU/C
△	202	QAL0824-001	MAIN PWB		LT-32A61BU/C,LT-32A61SJ,LT-32A61SU
△	202	QAL0825-001	MAIN PWB		LT-32A61BJ,LT-32A61BU,LT-32A61SU/C
△	203	QAL0828-001	KEY PWB		
△	204	QAL0827-001	LED PWB		

# EXPLODED VIEW

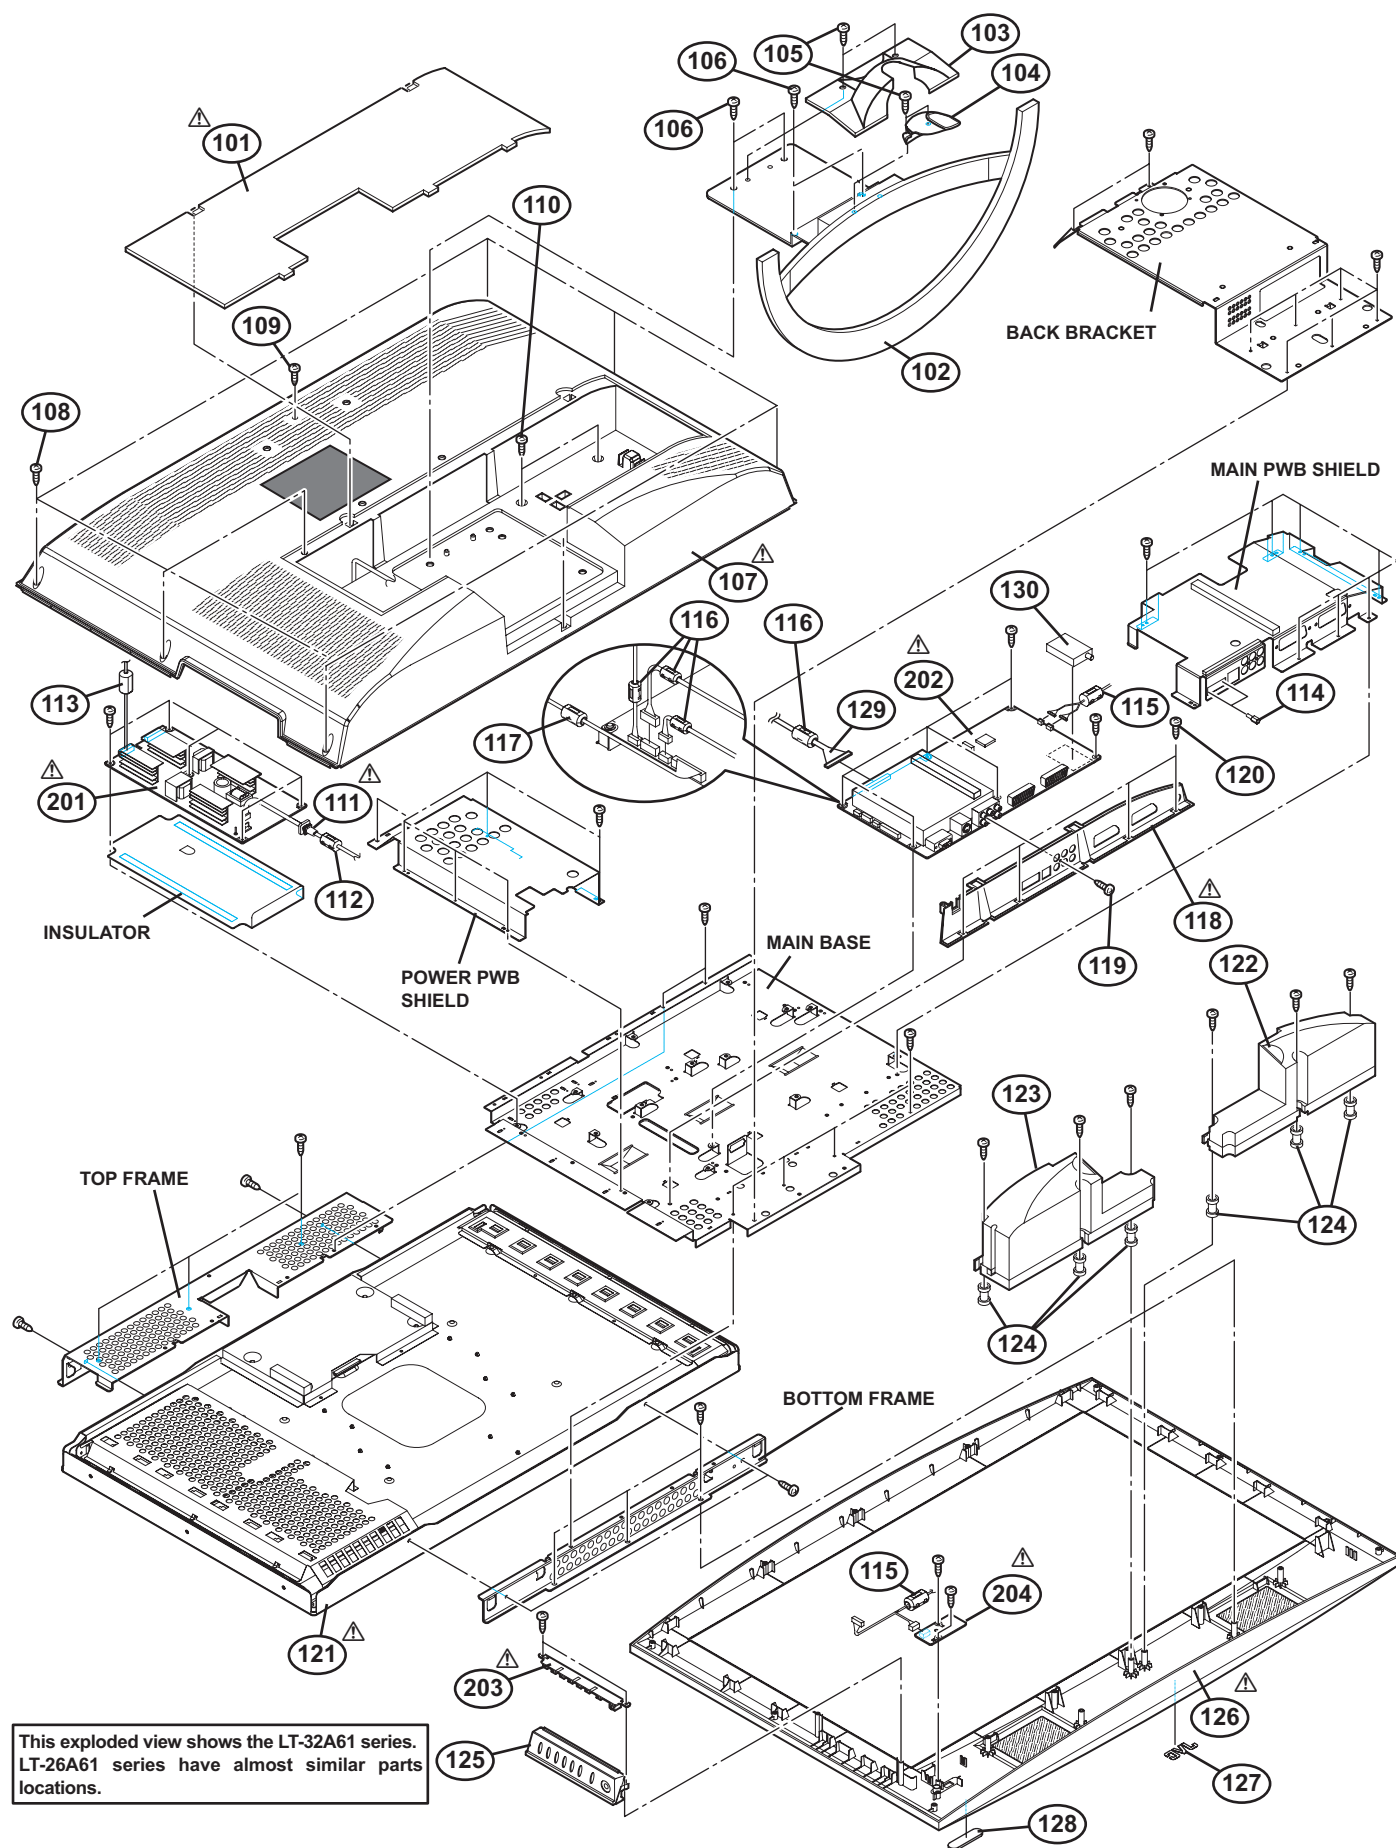

# PRINTED WIRING BOARD PARTS LIST [LT-26A61BJ, LT-26A61BU, LT-26A61BU<sub>C</sub>, LT-26A61SU<sub>C</sub>]

## MAIN P.W. BOARD ASS'Y (QAL0823-001)

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
U101	T1001-00081A	IC	(SERVICE)	ZD216	T2901-HC011A	Z DIODE	
U202	ATF02-26A61BJ	IC		ZD217	T2901-HC011A	Z DIODE	
U301	T1001-00073A-61	IC	(SERVICE)	ZD218	T2901-HC011A	Z DIODE	
U302	T1001-00064A	IC		ZD219	T2901-JC005A	Z DIODE	
U303	ATF32-26A61BJ	IC		ZD221	T2901-JC005A	Z DIODE	
U401	T1001-00084A	IC		ZD222	T2901-JC005A	Z DIODE	
U402	T1001-00085A	IC		ZD227	T2901-JC005A	Z DIODE	
U405	T1001-00075A	IC		ZD230	T2901-JC005A	Z DIODE	
U501	T1001-00086A	IC		ZD231	T2901-JC012B	Z DIODE	
U502	T1001-00063A	IC		ZD232	T2901-JC012B	Z DIODE	
U601	T1001-00087A	IC		ZD250	T2901-JC012B	Z DIODE	
U602	T1001-00088A	IC		ZD251	T2901-JC012B	Z DIODE	
U603	T1001-00070A	IC		ZD252	T2901-JC012B	Z DIODE	
U801	T0407-00004A	TRANSISTOR		ZD253	T2901-JC010B	Z DIODE	
U802	T0407-00004A	TRANSISTOR		ZD254	T2901-JC010B	Z DIODE	
				ZD255	T2901-JC010B	Z DIODE	
Q101	T1001-00052A	IC		ZD256	T2901-JC010B	Z DIODE	
Q102	T0507-00001A	TRANSISTOR		ZD257	T2901-JC010B	Z DIODE	
Q103	T0507-00001A	TRANSISTOR		ZD258	T2901-JC004A	Z DIODE	
Q104	T0507-00001A	TRANSISTOR		ZD259	T2901-JC004A	Z DIODE	
Q105	T0507-00006A	TRANSISTOR		ZD260	T2901-JC004A	Z DIODE	
Q106	T0507-00001A	TRANSISTOR		ZD261	T2901-JC004A	Z DIODE	
Q202	T0507-00001A	TRANSISTOR		ZD262	T2901-JC004A	Z DIODE	
Q203	T0507-00005A	TRANSISTOR		ZD263	T2703-KC007A	Z DIODE	
Q301	T1001-00049A	IC		ZD264	T2703-KC007A	Z DIODE	
Q303	T1001-00078A	IC		ZD267	T2703-KC007A	Z DIODE	
Q304	T0507-00003A	TRANSISTOR		ZD270	T2703-KC007A	Z DIODE	
Q305	T0507-00003A	TRANSISTOR		ZD271	T2703-KC007A	Z DIODE	
Q306	T0507-00007A	TRANSISTOR		ZD280	T2703-KC014A	Z DIODE	
Q307	T0407-00003A	TRANSISTOR		ZD281	T2703-KC014A	Z DIODE	
Q308	T0507-00005A	TRANSISTOR		ZD702	T2703-JC011A	DIODE	
Q309	T0507-00005A	TRANSISTOR		ZD2213	T2703-KC014A	Z DIODE	
Q311	T0507-00005A	TRANSISTOR		ZD2214	T2703-KC014A	Z DIODE	
Q312	T0507-00006A	TRANSISTOR		ZD2215	T2703-KC014A	Z DIODE	
Q315	T0507-00006A	TRANSISTOR		ZD2216	T2703-LC010A	Z DIODE	
Q316	T0507-00005A	TRANSISTOR		ZD2274	T2703-LC010A	Z DIODE	
Q317	T0407-00003A	TRANSISTOR					
Q403	T0507-00006A	TRANSISTOR		C101	T0407-00002A	C CAPACITOR	100nF 25V K
Q501	T1001-00079A	IC		C103	2007-000094	C CAPACITOR	10uF 10V Z
Q502	T1001-00048A	IC		C105	2007-000093	C CAPACITOR	100nF 50V Z
Q503	T0507-00007A	TRANSISTOR		C106	2007-000094	C CAPACITOR	10uF 10V Z
Q601	T0507-00006A	TRANSISTOR		C107	2007-000094	C CAPACITOR	10uF 10V Z
Q602	T0507-00002A	TRANSISTOR		C109	2007-000094	C CAPACITOR	10uF 10V Z
Q603	T0507-00002A	TRANSISTOR		C110	2007-000094	C CAPACITOR	10uF 10V Z
Q604	T0407-00002A	TRANSISTOR		C113	2007-000129	C CAPACITOR	10uF 10V Z
Q701	T0507-00002A	TRANSISTOR		C201	T0507-00005A	C CAPACITOR	1nF 50V K
Q702	T0507-00002A	TRANSISTOR		C202	2007-000081	C CAPACITOR	47nF 50V K
Q703	T0507-00002A	TRANSISTOR		C203	2007-000081	C CAPACITOR	47nF 50V K
Q801	T1001-00089A	IC		C204	2007-000081	C CAPACITOR	47nF 50V K
Q802	T0507-00008A	TRANSISTOR		C205	2007-000081	C CAPACITOR	47nF 50V K
Q804	T1001-00051A	IC		C206	2007-000081	C CAPACITOR	47nF 50V K
Q805	T0507-00008A	TRANSISTOR		C207	2007-000082	C CAPACITOR	47nF 50V K
Q806	T0507-00008A	TRANSISTOR		C208	2007-000082	C CAPACITOR	47nF 50V K
Q2203	T0407-00002A	TRANSISTOR		C209	2007-000082	C CAPACITOR	47nF 50V K
				C210	T0507-00005A	C CAPACITOR	1nF 50V K
D101	T0408-00002A	DIODE		C211	2007-000082	C CAPACITOR	47nF 50V K
D205	T2703-IC002A	Z DIODE		C213	T1001-00089A	C CAPACITOR	10pF 50V K
D206	T2703-IC002A	Z DIODE		C214	T1001-00089A	C CAPACITOR	10pF 50V K
D207	T2703-IC002A	Z DIODE		C215	T1001-00089A	C CAPACITOR	10pF 50V K
D208	T2703-IC002A	Z DIODE		C216	2007-000120	C CAPACITOR	0.47nF 50V K
D209	T2703-IC002A	Z DIODE		C218	2007-000120	C CAPACITOR	0.47nF 50V K
D210	T2703-IC002A	Z DIODE		C219	2007-000120	C CAPACITOR	0.47nF 50V K
D222	2007-000070	DIODE		C220	2007-000120	C CAPACITOR	0.47nF 50V K
D223	2007-000070	DIODE		C221	2007-000120	C CAPACITOR	0.47nF 50V K
D224	2007-000070	DIODE		C222	2007-000121	C CAPACITOR	0.47nF 50V K
D225	2007-000070	DIODE		C223	2007-000121	C CAPACITOR	0.47nF 50V K
D226	2007-000070	DIODE		C226	2007-000121	C CAPACITOR	0.47nF 50V K
D227	2007-000882	DIODE		C227	2007-000082	C CAPACITOR	47nF 50V K
D228	2007-000882	DIODE		C228	2007-000084	C CAPACITOR	47nF 50V K
D229	2007-000882	DIODE		C229	2007-000084	C CAPACITOR	47nF 50V K
D301	T0408-00002A	DIODE		C230	2007-000121	C CAPACITOR	0.47nF 50V K
D601	T0408-00002A	DIODE		C233	2007-000121	C CAPACITOR	0.47nF 50V K
D602	T0408-00002A	DIODE		C234	2007-000078	C CAPACITOR	0.47nF 50V K
D702	T0408-00002A	DIODE		C235	2007-000078	C CAPACITOR	0.47nF 50V K
D704	T0408-00002A	DIODE		C236	T1001-00089A	C CAPACITOR	10pF 50V K
D801	T0407-00005A	DIODE		C238	T1001-00089A	C CAPACITOR	10pF 50V K
ZD101	T0408-000009A	Z DIODE		C242	2007-000643	C CAPACITOR	0.33nF 50V K
ZD202	T0408-000009A	Z DIODE		C243	2007-000643	C CAPACITOR	0.33nF 50V K
ZD203	T0408-000009A	Z DIODE		C244	2007-000643	C CAPACITOR	0.33nF 50V K
ZD204	T0408-000009A	Z DIODE		C248	2007-000077	C CAPACITOR	330nF 16V Z
ZD206	T0408-000009A	Z DIODE		C249	2007-000077	C CAPACITOR	330nF 16V Z
ZD209	T2901-HC002A	Z DIODE		C252	T0407-00002A	C CAPACITOR	100nF 25V K
ZD210	T2901-HC002A	Z DIODE		C253	T0407-00002A	C CAPACITOR	100nF 25V K
ZD211	T2901-HC002A	Z DIODE		C254	T0407-00002A	C CAPACITOR	100nF 25V K
ZD212	T2901-HC002A	Z DIODE		C255	T0407-00002A	C CAPACITOR	100nF 25V K
ZD213	T2901-HC002A	Z DIODE		C256	T0407-00004A	C CAPACITOR	100nF 25V K
ZD214	T2901-HC011A	Z DIODE		C257	T0407-00004A	C CAPACITOR	100nF 25V K
ZD215	T2901-HC011A	Z DIODE		C258	T0407-00004A	C CAPACITOR	100nF 25V K
				C259	T0407-00004A	C CAPACITOR	100nF 25V K
				C301	T0407-00004A	C CAPACITOR	100nF 25V K



△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C302	T0407-00003A	C CAPACITOR	100nF 25V K	C528	T2703-IC002A	C CAPACITOR	100nF 25V K
C303	T0407-00003A	C CAPACITOR	100nF 25V K	C529	T2703-IC002A	C CAPACITOR	100nF 25V K
C304	T0407-00003A	C CAPACITOR	100nF 25V K	C530	T2703-IC002A	C CAPACITOR	100nF 25V K
C305	T0407-00003A	C CAPACITOR	100nF 25V K	C531	T2703-IC002A	C CAPACITOR	100nF 25V K
C306	2007-000074	C CAPACITOR	0.22nF 50V K	C532	T2703-IC002A	C CAPACITOR	100nF 25V K
C307	T0507-00002A	C CAPACITOR	10nF 50V K	C533	T2703-IC002A	C CAPACITOR	100nF 25V K
C308	2007-000075	C CAPACITOR	220nF 50V K	C534	T2703-IC002A	C CAPACITOR	100nF 25V K
C309	T0407-00003A	C CAPACITOR	100nF 25V K	C535	T2703-JC011A	C CAPACITOR	100nF 25V K
C310	T0408-00002A	C CAPACITOR	100nF 25V K	C536	T2703-JC011A	C CAPACITOR	100nF 25V K
C311	T0507-00007A	C CAPACITOR	33pF 50V K	C537	T2703-JC011A	C CAPACITOR	100nF 25V K
C312	T0507-00001A	C CAPACITOR	0.1nF 50V K	C538	T2703-JC011A	C CAPACITOR	100nF 25V K
C313	T0507-00001A	C CAPACITOR	0.1nF 50V K	C539	T2703-JC011A	C CAPACITOR	100nF 25V K
C314	T0507-00001A	C CAPACITOR	0.1nF 50V K	C540	2007-000070	C CAPACITOR	100nF 25V K
C316	T0507-00007A	C CAPACITOR	33pF 50V K	C541	2007-000070	C CAPACITOR	100nF 25V K
C317	T0408-00002A	C CAPACITOR	100nF 25V K	C543	2007-000070	C CAPACITOR	100nF 25V K
C318	T0408-00002A	C CAPACITOR	100nF 25V K	C544	2007-000070	C CAPACITOR	100nF 25V K
C319	T0408-00002A	C CAPACITOR	100nF 25V K	C545	2007-000070	C CAPACITOR	100nF 25V K
C402	T0408-00002A	C CAPACITOR	100nF 25V K	C546	2007-000882	C CAPACITOR	100nF 25V K
C403	T0408-00002A	C CAPACITOR	100nF 25V K	C548	2007-000882	C CAPACITOR	100nF 25V K
C404	T0408-00002A	C CAPACITOR	100nF 25V K	C549	2007-000882	C CAPACITOR	100nF 25V K
C405	T0408-00002A	C CAPACITOR	100nF 25V K	C550	T1001-00051A	C CAPACITOR	10pF 50V K
C406	T0408-00002A	C CAPACITOR	100nF 25V K	C552	2007-000882	C CAPACITOR	100nF 25V K
C407	T0408-00002A	C CAPACITOR	100nF 25V K	C553	T0507-00007A	C CAPACITOR	33pF 50V K
C409	T0407-00005A	C CAPACITOR	100nF 25V K	C554	T0507-00007A	C CAPACITOR	33pF 50V K
C411	T0407-00005A	C CAPACITOR	100nF 25V K	C555	2007-000882	C CAPACITOR	100nF 25V K
C412	T0407-00005A	C CAPACITOR	100nF 25V K	C556	T0507-00005A	C CAPACITOR	1nF 50V K
C413	T0407-00005A	C CAPACITOR	100nF 25V K	C557	T1001-00051A	C CAPACITOR	10pF 50V K
C414	T0407-00005A	C CAPACITOR	100nF 25V K	C559	2007-001134	C CAPACITOR	1uF 16V Z
C415	T0408-000009A	C CAPACITOR	100nF 25V K	C601	2007-000309	C CAPACITOR	100nF 25V K
C416	T0408-000009A	C CAPACITOR	100nF 25V K	C604	2007-000118	C CAPACITOR	3.3nF 50V K
C417	T0408-000009A	C CAPACITOR	100nF 25V K	C605	2007-000118	C CAPACITOR	3.3nF 50V K
C419	T0408-000009A	C CAPACITOR	100nF 25V K	C606	T1001-00048A	C CAPACITOR	6pF 50V K
C420	T0408-000009A	C CAPACITOR	100nF 25V K	C607	T1001-00048A	C CAPACITOR	6pF 50V K
C421	2007-000115	C CAPACITOR	1.5nF 50V K	C608	T0507-00006A	C CAPACITOR	47pF 50V K
C422	2007-000115	C CAPACITOR	1.5nF 50V K	C610	2007-000309	C CAPACITOR	100nF 25V K
C423	2007-000115	C CAPACITOR	1.5nF 50V K	C611	T0507-00006A	C CAPACITOR	47pF 50V K
C424	T0507-00001A	C CAPACITOR	0.1nF 50V K	C612	T2203-FC100D	C RESISTOR	0Ω 1/16W J
C425	T0507-00003A	C CAPACITOR	22pF 50V K	C614	2007-000123	C CAPACITOR	4.7nF 50V K
C426	T0507-00003A	C CAPACITOR	22pF 50V K	C615	2007-000643	C CAPACITOR	0.33nF 50V K
C427	T2901-HC002A	C CAPACITOR	100nF 25V K	C616	2007-000643	C CAPACITOR	0.33nF 50V K
C428	T2901-HC002A	C CAPACITOR	100nF 25V K	C617	2007-000309	C CAPACITOR	100nF 25V K
C429	T2901-HC002A	C CAPACITOR	100nF 25V K	C618	T0507-00002A	C CAPACITOR	10nF 50V K
C430	T2901-HC002A	C CAPACITOR	100nF 25V K	C619	T0507-00002A	C CAPACITOR	10nF 50V K
C431	T2901-HC002A	C CAPACITOR	100nF 25V K	C620	T0507-00002A	C CAPACITOR	10nF 50V K
C432	T2901-HC011A	C CAPACITOR	100nF 25V K	C621	2007-000309	C CAPACITOR	100nF 25V K
C433	T2901-HC011A	C CAPACITOR	100nF 25V K	C623	2007-000119	C CAPACITOR	3.9nF 50V K
C434	T2901-HC011A	C CAPACITOR	100nF 25V K	C624	2007-000119	C CAPACITOR	3.9nF 50V K
C435	T2901-HC011A	C CAPACITOR	100nF 25V K	C625	T0507-00005A	C CAPACITOR	1nF 50V K
C436	T1001-00051A	C CAPACITOR	10pF 50V K	C626	2007-000076	C CAPACITOR	0.33nF 50V K
C438	T2901-HC011A	C CAPACITOR	100nF 25V K	C627	2007-000076	C CAPACITOR	0.33nF 50V K
C439	T2901-JC005A	C CAPACITOR	100nF 25V K	C632	2007-000076	C CAPACITOR	0.33nF 50V K
C440	T2901-JC005A	C CAPACITOR	100nF 25V K	C633	2007-000076	C CAPACITOR	0.33nF 50V K
C441	T2901-JC005A	C CAPACITOR	100nF 25V K	C634	2007-001134	C CAPACITOR	1uF 16V Z
C442	T2901-JC005A	C CAPACITOR	100nF 25V K	C635	2007-001134	C CAPACITOR	1uF 16V Z
C443	T2901-JC005A	C CAPACITOR	100nF 25V K	C636	T0507-00006A	C CAPACITOR	47pF 50V K
C444	T2901-JC012B	C CAPACITOR	100nF 25V K	C638	2007-000309	C CAPACITOR	100nF 25V K
C445	T2901-JC012B	C CAPACITOR	100nF 25V K	C639	2007-000090	C CAPACITOR	6.8nF 50V K
C446	T2901-JC012B	C CAPACITOR	100nF 25V K	C640	2007-000090	C CAPACITOR	6.8nF 50V K
C447	T2901-JC012B	C CAPACITOR	100nF 25V K	C701	2007-000071	C CAPACITOR	100nF 25V K
C451	T0507-00002A	C CAPACITOR	10nF 50V K	C702	2007-000071	C CAPACITOR	100nF 25V K
C452	T2901-JC012B	C CAPACITOR	100nF 25V K	C703	T0507-00008A	C CAPACITOR	10nF 50V K
C453	T2901-JC010B	C CAPACITOR	100nF 25V K	C707	2007-000072	C CAPACITOR	100nF 50V K
C454	T2901-JC010B	C CAPACITOR	100nF 25V K	C710	2007-000084	C CAPACITOR	47nF 50V K
C455	2007-000078	C CAPACITOR	0.47nF 50V K	C712	2007-001167	C CAPACITOR	0.15nF 50V K
C456	T2901-JC010B	C CAPACITOR	100nF 25V K	C714	2007-000402	C CAPACITOR	2.2nF 50V K
C457	T2901-JC010B	C CAPACITOR	100nF 25V K	C715	T0507-00005A	C CAPACITOR	1nF 50V K
C458	T2901-JC010B	C CAPACITOR	100nF 25V K	C801	2007-000071	C CAPACITOR	100nF 25V K
C459	2007-001167	C CAPACITOR	0.15nF 50V K	C802	2007-000071	C CAPACITOR	100nF 25V K
C460	2007-001167	C CAPACITOR	0.15nF 50V K	C805	2007-000071	C CAPACITOR	100nF 25V K
C461	2007-000115	C CAPACITOR	1.5nF 50V K	C806	2007-000113	C CAPACITOR	100nF 25V K
C501	T2901-JC004A	C CAPACITOR	100nF 25V K	C807	2007-000113	C CAPACITOR	100nF 25V K
C502	T2901-JC004A	C CAPACITOR	100nF 25V K	C820	2007-000113	C CAPACITOR	100nF 25V K
C503	T2901-JC004A	C CAPACITOR	100nF 25V K	C821	2007-000113	C CAPACITOR	100nF 25V K
C504	T2901-JC004A	C CAPACITOR	100nF 25V K	C2251	2007-000113	C CAPACITOR	100nF 25V K
C506	T2901-JC004A	C CAPACITOR	100nF 25V K	CA02	T0507-00006A	C CAPACITOR	47pF 50V K
C507	T2703-KC007A	C CAPACITOR	100nF 25V K	CA03	T0507-00006A	C CAPACITOR	47pF 50V K
C508	T2703-KC007A	C CAPACITOR	100nF 25V K	L301	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
C509	T2703-KC007A	C CAPACITOR	100nF 25V K	R101	2401-001363	C RESISTOR	330Ω 1/16W J
C510	T2703-KC007A	C CAPACITOR	100nF 25V K	R102	2401-001363	C RESISTOR	330Ω 1/16W J
C511	T2703-KC007A	C CAPACITOR	100nF 25V K	R104	2401-001363	C RESISTOR	330Ω 1/16W J
C512	T2703-KC014A	C CAPACITOR	100nF 25V K	R107	T2401-BT101O	C RESISTOR	220Ω 1/16W J
C513	T2703-KC014A	C CAPACITOR	100nF 25V K	R108	T2203-FC060D	C RESISTOR	0Ω 1/16W J
C514	T2703-KC014A	C CAPACITOR	100nF 25V K	R109	T1001-00087A	C RESISTOR	100KΩ 1/16W J
C515	T2703-KC014A	C CAPACITOR	100nF 25V K	R110	T1001-00087A	C RESISTOR	100KΩ 1/16W J
C516	T2703-KC014A	C CAPACITOR	100nF 25V K	R114	T1001-00087A	C RESISTOR	100KΩ 1/16W J
C517	T2703-LC010A	C CAPACITOR	100nF 25V K	R115	2401-001363	C RESISTOR	330Ω 1/16W J
C518	T2703-LC010A	C CAPACITOR	100nF 25V K	R119	2401-001363	C RESISTOR	330Ω 1/16W J
C519	T2703-LC010A	C CAPACITOR	100nF 25V K	R121	T1001-00087A	C RESISTOR	100KΩ 1/16W J
C520	T2703-LC010A	C CAPACITOR	100nF 25V K	R123	T2401-CT471O	C RESISTOR	330Ω 1/16W J
C524	T2703-LC010A	C CAPACITOR	100nF 25V K	R124	T2401-BT101O	C RESISTOR	220Ω 1/16W J
C525	T2703-IC002A	C CAPACITOR	100nF 25V K	R126	TA40-00016A	C RESISTOR	1KΩ 1/16W J
C526	T2703-IC002A	C CAPACITOR	100nF 25V K	R127	T1001-00073A	C RESISTOR	10KΩ 1/16W J
C527	T2703-IC002A	C CAPACITOR	100nF 25V K				

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R128	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R331	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R129	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R332	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R130	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R333	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R131	T3711-00034	C RESISTOR	1.5KΩ 1/16W J	R335	T1001-00084A	C RESISTOR	22KΩ 1/16W J
R132	T1001-00086A	C RESISTOR	47KΩ 1/16W J	R336	T1001-00086A	C RESISTOR	47KΩ 1/16W J
R133	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R337	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R134	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R338	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R136	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R339	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R138	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R340	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R210	2401-002075	C RESISTOR	270Ω 1/16W J	R341	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R211	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R342	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R214	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R343	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R215	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R344	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R216	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R345	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R217	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R346	2401-000914	C RESISTOR	100Ω 1/16W J
R218	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R347	2401-000914	C RESISTOR	100Ω 1/16W J
R219	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R348	2401-000914	C RESISTOR	100Ω 1/16W J
R220	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R349	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R223	T2801-00011A	C RESISTOR	470Ω 1/16W J	R350	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R224	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R351	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R225	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R352	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R226	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R353	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R227	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R354	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R228	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R355	2401-000914	C RESISTOR	100Ω 1/16W J
R229	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R356	2401-000914	C RESISTOR	100Ω 1/16W J
R230	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R357	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R231	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R358	2401-000603	C RESISTOR	100Ω 1/16W J
R232	T2801-00011A	C RESISTOR	470Ω 1/16W J	R359	2401-000603	C RESISTOR	100Ω 1/16W J
R233	T2203-FC221E	C RESISTOR	33Ω 1/16W J	R360	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R235	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R361	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R236	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R363	T2801-00014A	C RESISTOR	680Ω 1/16W J
R237	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R364	T2203-FC102D	C RESISTOR	10Ω 1/16W J
R238	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R365	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R239	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R367	2401-000603	C RESISTOR	100Ω 1/16W J
R242	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R370	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R243	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R371	T2401-CT4710	C RESISTOR	330Ω 1/16W J
R244	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R373	2401-000603	C RESISTOR	100Ω 1/16W J
R245	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R375	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R246	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R376	2401-002075	C RESISTOR	270Ω 1/16W J
R247	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R377	T2203-FC060D	C RESISTOR	0Ω 1/16W J
R248	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R378	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R249	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R380	T1001-00083A	C RESISTOR	10KΩ 1/16W J
R255	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R382	2401-000603	C RESISTOR	100Ω 1/16W J
R256	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R383	T2801-00013A	C RESISTOR	560Ω 1/16W J
R260	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R385	2401-002235	C RESISTOR	100Ω 1/16W J
R261	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R390	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R262	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R391	T2203-FC060D	C RESISTOR	0Ω 1/16W J
R263	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R392	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R264	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R393	2401-002235	C RESISTOR	100Ω 1/16W J
R267	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R394	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R271	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R395	T2203-FC330D	C RESISTOR	0Ω 1/16W J
R272	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R396	T3711-00029	C RESISTOR	3.3KΩ 1/16W J
R273	2401-002075	C RESISTOR	270Ω 1/16W J	R397	T3711-00029	C RESISTOR	3.3KΩ 1/16W J
R274	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R411	T2801-00011A	C RESISTOR	470Ω 1/16W J
R275	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R412	T2203-FC334D	C RESISTOR	68Ω 1/16W J
R277	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R413	2401-002235	C RESISTOR	100Ω 1/16W J
R278	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R414	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R279	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R415	T2801-00014A	C RESISTOR	680Ω 1/16W J
R280	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R416	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R281	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R417	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R282	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R418	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R283	T2203-BC106E	C RESISTOR	82Ω 1/16W J	R419	T2203-FC100D	C RESISTOR	0Ω 1/16W J
R285	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R427	T1001-00052A	C RESISTOR	1MΩ 1/16W J
R286	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R429	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R287	T2203-FC470D	C RESISTOR	4.7Ω 1/16W J	R432	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R288	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R434	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R289	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R436	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R290	2401-000269	C RESISTOR	100Ω 1/16W J	R442	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R291	2401-000269	C RESISTOR	100Ω 1/16W J	R456	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R292	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R457	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R294	T2203-FC470D	C RESISTOR	4.7Ω 1/16W J	R458	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R295	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R459	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R296	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R460	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R299	T2203-FC221E	C RESISTOR	33Ω 1/16W J	R461	T1001-00070A	C RESISTOR	470KΩ 1/16W J
R304	2401-000269	C RESISTOR	100Ω 1/16W J	R462	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R305	2401-000269	C RESISTOR	100Ω 1/16W J	R501	T1001-00083A	C RESISTOR	10KΩ 1/16W J
R307	2401-000269	C RESISTOR	100Ω 1/16W J	R504	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R308	2401-001495	C RESISTOR	100Ω 1/16W J	R505	T1001-00087A	C RESISTOR	100KΩ 1/16W J
R310	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R509	2007-001167	CHIP BEAD	30Ω
R313	2401-001495	C RESISTOR	100Ω 1/16W J	R510	2007-001167	CHIP BEAD	30Ω
R314	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	R511	2007-001167	CHIP BEAD	30Ω
R315	T2203-FC101D	C RESISTOR	10Ω 1/16W J	R515	2007-001167	CHIP BEAD	30Ω
R316	T2203-FC101D	C RESISTOR	10Ω 1/16W J	R516	2007-001167	CHIP BEAD	30Ω
R317	T2203-FC101D	C RESISTOR	10Ω 1/16W J	R517	2007-000115	CHIP BEAD	30Ω
R318	T3711-00035	C RESISTOR	2.7KΩ 1/16W J	R518	2007-000115	CHIP BEAD	30Ω
R319	T2203-FC101D	C RESISTOR	10Ω 1/16W J	R519	2007-000115	CHIP BEAD	30Ω
R320	2401-001495	C RESISTOR	100Ω 1/16W J	R529	T2203-FC100D	C RESISTOR	0Ω 1/16W J
R321	T3711-00035	C RESISTOR	2.7KΩ 1/16W J	R540	T2203-FC102D	C RESISTOR	10Ω 1/16W J
R322	2401-001495	C RESISTOR	100Ω 1/16W J	R541	2007-000115	CHIP BEAD	30Ω
R327	2401-001495	C RESISTOR	100Ω 1/16W J	R542	2007-000115	CHIP BEAD	30Ω
R328	T2401-CT4700	C RESISTOR	100Ω 1/16W J	R543	2007-000074	CHIP BEAD	30Ω
R329	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R544	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R330	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	R546	2007-000074	CHIP BEAD	30Ω

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
R548	2007-000074	CHIP BEAD	30Ω		R2291	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J	
R550	2007-000074	CHIP BEAD	30Ω		R2292	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J	
R560	2007-000074	CHIP BEAD	30Ω		R2293	T1001-00081A	C RESISTOR	4.7KΩ 1/16W J	
R561	2007-000402	CHIP BEAD	30Ω		RA01	T2203-FC220D	C RESISTOR	0Ω 1/16W J	
R562	2007-000402	CHIP BEAD	30Ω		RA02	T2203-FC330D	C RESISTOR	0Ω 1/16W J	
R563	2007-000402	CHIP BEAD	30Ω		RA03	T2203-FC331D	C RESISTOR	33Ω 1/16W J	
R565	2007-000402	CHIP BEAD	30Ω		RA04	T2203-FC224D	C RESISTOR	33Ω 1/16W J	
R566	T2203-FC102D	C RESISTOR	10Ω 1/16W J		RA05	T2203-FC224D	C RESISTOR	33Ω 1/16W J	
R567	2007-000402	CHIP BEAD	30Ω		RA06	T2203-FC224D	C RESISTOR	33Ω 1/16W J	
R568	T2203-FC102D	C RESISTOR	10Ω 1/16W J		RA07	T2203-FC224D	C RESISTOR	33Ω 1/16W J	
R571	T2203-FC334D	C RESISTOR	68Ω 1/16W J		RA08	T2203-FC331D	C RESISTOR	33Ω 1/16W J	
R572	T2203-FC334D	C RESISTOR	68Ω 1/16W J		RA09	T2203-FC331D	C RESISTOR	33Ω 1/16W J	
R573	T2203-FC334D	C RESISTOR	68Ω 1/16W J		RA10	T2203-FC331D	C RESISTOR	33Ω 1/16W J	
R574	2401-002235	C RESISTOR	100Ω 1/16W J		L201	2007-000309	CHIP BEAD	80Ω	
R575	T2203-FC334D	C RESISTOR	68Ω 1/16W J		L202	2007-000309	CHIP BEAD	80Ω	
R577	2007-000075	CHIP BEAD	30Ω		L203	2007-000309	CHIP BEAD	80Ω	
R579	2007-000075	CHIP BEAD	30Ω		L204	2007-000309	CHIP BEAD	80Ω	
R582	2007-000075	CHIP BEAD	30Ω		L205	2007-000309	CHIP BEAD	80Ω	
R583	2007-000075	CHIP BEAD	30Ω		L206	2007-000071	CHIP BEAD	80Ω	
R584	2007-000075	CHIP BEAD	30Ω		L207	2007-000071	CHIP BEAD	80Ω	
R585	2007-000643	CHIP BEAD	30Ω		L208	2007-000071	CHIP BEAD	80Ω	
R586	2007-000643	CHIP BEAD	30Ω		L209	2007-000071	CHIP BEAD	80Ω	
R587	2007-000643	CHIP BEAD	30Ω		L210	2007-000071	CHIP BEAD	80Ω	
R588	2007-000643	CHIP BEAD	30Ω		L211	2007-000113	CHIP BEAD	80Ω	
R589	T2203-FC220D	C RESISTOR	0Ω 1/16W J		L214	2007-000113	CHIP BEAD	80Ω	
R591	2007-000643	CHIP BEAD	30Ω		L215	2007-000113	CHIP BEAD	80Ω	
R592	2007-000076	CHIP BEAD	30Ω		L216	2007-000113	CHIP BEAD	80Ω	
R593	T3722-00040A	C RESISTOR	1KΩ 1/16W J		L217	2007-000113	CHIP BEAD	80Ω	
R594	T3722-00041A	C RESISTOR	1KΩ 1/16W J		L218	2007-000072	CHIP BEAD	80Ω	
R595	T3711-00038	C RESISTOR	4.7KΩ 1/16W J		L219	2007-000072	CHIP BEAD	80Ω	
R596	T3711-00037	C RESISTOR	4.7KΩ 1/16W J		L220	2007-000072	CHIP BEAD	80Ω	
R597	T2401-BT102A	C RESISTOR	390Ω 1/16W J		L221	2007-000072	CHIP BEAD	80Ω	
R601	T3722-00041A	C RESISTOR	1KΩ 1/16W J		L302	2007-000072	CHIP BEAD	80Ω	
R602	T1001-00063A	C RESISTOR	68KΩ 1/16W J		L303	2007-001134	CHIP BEAD	80Ω	
R603	2401-000242	C RESISTOR	150Ω 1/16W J		L304	2007-001134	CHIP BEAD	80Ω	
R604	T3711-00037	C RESISTOR	4.7KΩ 1/16W J		L305	2007-001134	CHIP BEAD	80Ω	
R605	T3722-00041A	C RESISTOR	1KΩ 1/16W J		L306	2007-000093	CHIP BEAD	500Ω	
R606	T1001-00086A	C RESISTOR	47KΩ 1/16W J		L317	T2007-HC330J	CHIP COIL	10uH	
R607	T3711-00037	C RESISTOR	4.7KΩ 1/16W J		L401	2007-000093	CHIP BEAD	500Ω	
R608	T1001-00075A	C RESISTOR	30KΩ 1/16W J		L402	2007-000093	CHIP BEAD	500Ω	
R609	T3722-00041A	C RESISTOR	1KΩ 1/16W J		L404	2007-000093	CHIP BEAD	500Ω	
R610	T1001-00075A	C RESISTOR	30KΩ 1/16W J		L405	2007-000093	CHIP BEAD	500Ω	
R611	T3722-00041A	C RESISTOR	1KΩ 1/16W J		L406	2007-000094	CHIP BEAD	500Ω	
R612	T1001-00086A	C RESISTOR	47KΩ 1/16W J		L408	2007-000094	CHIP BEAD	500Ω	
R613	2401-002235	C RESISTOR	100Ω 1/16W J		L501	2007-000094	CHIP BEAD	500Ω	
R614	2401-002594	C RESISTOR	100Ω 1/16W J		L502	2007-000094	CHIP BEAD	500Ω	
R615	2401-002594	C RESISTOR	100Ω 1/16W J		L504	2007-000094	CHIP BEAD	500Ω	
R616	2401-002594	C RESISTOR	100Ω 1/16W J		L505	2007-000129	CHIP BEAD	500Ω	
R617	2401-002594	C RESISTOR	100Ω 1/16W J		L507	2007-000129	CHIP BEAD	500Ω	
R618	2401-002594	C RESISTOR	100Ω 1/16W J		L509	2007-000129	CHIP BEAD	500Ω	
R619	T2203-FC100D	C RESISTOR	0Ω 1/16W J		L510	2007-000129	CHIP BEAD	500Ω	
R620	T2203-FC100D	C RESISTOR	0Ω 1/16W J		L511	2007-000129	CHIP BEAD	500Ω	
R621	T2203-FC220D	C RESISTOR	0Ω 1/16W J		L512	2007-000096	CHIP BEAD	500Ω	
R622	T2203-FC220D	C RESISTOR	0Ω 1/16W J		L513	2007-000096	CHIP BEAD	500Ω	
R623	T1001-00083A	C RESISTOR	10KΩ 1/16W J		L514	2007-000096	CHIP BEAD	500Ω	
R624	T1001-00082A	C RESISTOR	20KΩ 1/16W J		L515	2007-000096	CHIP BEAD	500Ω	
R625	T3711-00033	C RESISTOR	1KΩ 1/16W J		L516	2007-000096	CHIP BEAD	500Ω	
R629	T2401-CT221O	C RESISTOR	100Ω 1/16W J		L517	2007-000097	CHIP BEAD	500Ω	
R630	T1001-00082A	C RESISTOR	20KΩ 1/16W J		L5VA	2007-000120	CHIP BEAD	80Ω	
R631	T1001-00083A	C RESISTOR	10KΩ 1/16W J		L5VB	2007-000120	CHIP BEAD	80Ω	
R632	T2203-FC102D	C RESISTOR	10Ω 1/16W J		L5VC	2007-000121	CHIP BEAD	80Ω	
R633	T3711-00037	C RESISTOR	4.7KΩ 1/16W J		L601	T2007-HC472J	CHIP COIL	10uH	
R701	T2401-CT221O	C RESISTOR	100Ω 1/16W J		L602	T2007-HC472J	CHIP COIL	10uH	
R702	T2401-CT221O	C RESISTOR	100Ω 1/16W J		L603	2007-000097	CHIP BEAD	500Ω	
R703	T2401-CT221O	C RESISTOR	100Ω 1/16W J		L606	2007-000097	CHIP BEAD	500Ω	
R704	T2801-00013A	C RESISTOR	560Ω 1/16W J		L608	2007-000097	CHIP BEAD	500Ω	
R705	T2801-00012A	C RESISTOR	820Ω 1/16W J		L610	2007-000121	CHIP BEAD	80Ω	
R707	T2203-FC103D	C RESISTOR	10Ω 1/16W J		L701	2007-000109	CHIP COIL	10uH	
R708	T2401-CT221O	C RESISTOR	100Ω 1/16W J		L703	2007-000102	SMD COIL	680uH	
R709	T2203-FC103D	C RESISTOR	10Ω 1/16W J		L705	2007-000100	SMD COIL	470uH	
R710	T3711-00033	C RESISTOR	1KΩ 1/16W J		L801	2007-000118	CHIP BEAD	80Ω	
R711	T2203-FC330D	C RESISTOR	0Ω 1/16W J		L802	2007-000118	CHIP BEAD	80Ω	
R712	T1001-00088A	C RESISTOR	100KΩ 1/16W J		L803	2007-000118	CHIP BEAD	80Ω	
R713	T1001-00084A	C RESISTOR	22KΩ 1/16W J		L804	2007-000118	CHIP BEAD	80Ω	
R801	T1001-00083A	C RESISTOR	10KΩ 1/16W J		L805	2007-000118	CHIP BEAD	80Ω	
R802	T3711-00037	C RESISTOR	4.7KΩ 1/16W J		L806	2007-000077	CHIP BEAD	80Ω	
R803	2401-002075	C RESISTOR	270Ω 1/16W J		L807	2007-000077	CHIP BEAD	80Ω	
R804	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J		L808	2007-000077	CHIP BEAD	80Ω	
R805	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J		L809	2007-000077	CHIP BEAD	80Ω	
R806	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J		L810	2007-000077	CHIP BEAD	80Ω	
R810	T2203-FC220D	C RESISTOR	0Ω 1/16W J		L812	2007-000119	CHIP BEAD	80Ω	
R2215	T2203-FC332D	C RESISTOR	47Ω 1/16W J		L813	2007-000119	CHIP BEAD	80Ω	
R2219	T2203-FC104D	C RESISTOR	22Ω 1/16W J		L814	2007-000107	SMD COIL	100uH	
R2220	T2203-FC104D	C RESISTOR	22Ω 1/16W J		L815	2007-000119	CHIP BEAD	80Ω	
R2221	T2203-FC104D	C RESISTOR	22Ω 1/16W J		L816	2007-000119	CHIP BEAD	80Ω	
R2222	T2203-FC104D	C RESISTOR	22Ω 1/16W J		L820	2007-000119	CHIP BEAD	80Ω	
R2223	T2203-CC105D	C RESISTOR	22Ω 1/16W J		L821	2007-000120	CHIP BEAD	80Ω	
R2224	T2203-CC105D	C RESISTOR	22Ω 1/16W J		L822	2007-000120	CHIP BEAD	80Ω	
R2225	T2203-CC105D	C RESISTOR	22Ω 1/16W J		L823	2007-000120	CHIP BEAD	80Ω	
R2226	T2203-CC105D	C RESISTOR	22Ω 1/16W J		L830	T3711-00033	C RESISTOR	1KΩ 1/16W J	
R2227	T2203-CC105D	C RESISTOR	22Ω 1/16W J		LA01	2007-000121	CHIP BEAD	80Ω	
R2228	T2203-FC150D	C RESISTOR	22Ω 1/16W J		LA02	2007-000121	CHIP BEAD	80Ω	
R2290	T3711-00033	C RESISTOR	1KΩ 1/16W J						

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
CE101	2007-000097	E CAPACITOR	100uF	16V M	J501	2401-000603	CONNECTOR		
CE102	2007-000107	E CAPACITOR	47uF	16V M	J601	T2401-CT4700	CONNECTOR		
CE103	2007-000109	E CAPACITOR	22uF	16V M	J602	2401-000914	CONNECTOR		
CE105	T2203-FC220D	E CAPACITOR	10uF	16V M	J801	2401-002235	CONNECTOR		
CE107	T2203-FC060D	E CAPACITOR	1uF	50V M	RN301	2007-000084	BEAD ARRAY	120Ω	
CE108	2007-000096	E CAPACITOR	0.1uF	50V M	RN302	2007-000084	BEAD ARRAY	120Ω	
CE202	T2203-FC220D	E CAPACITOR	10uF	16V M	RN303	2007-000084	BEAD ARRAY	120Ω	
CE203	T2203-FC220D	E CAPACITOR	10uF	16V M	RN304	2007-000084	BEAD ARRAY	120Ω	
CE204	T2203-FC220D	E CAPACITOR	10uF	16V M	RN305	2007-000084	BEAD ARRAY	120Ω	
CE205	T2203-FC220D	E CAPACITOR	10uF	16V M	RN306	2007-000090	BEAD ARRAY	120Ω	
CE206	T2203-FC103D	E CAPACITOR	220uF	16V M	RN307	2007-000090	BEAD ARRAY	120Ω	
CE207	T2203-FC103D	E CAPACITOR	220uF	16V M	RN308	T1001-00079A	CHIP ARRAY	4.7KΩ	1/16W J
CE220	2007-000097	E CAPACITOR	100uF	16V M	RN309	2007-000090	BEAD ARRAY	120Ω	
CE221	2007-000097	E CAPACITOR	100uF	16V M	RN310	T1001-00079A	CHIP ARRAY	4.7KΩ	1/16W J
CE301	T2203-FC150D	E CAPACITOR	100uF	10V M	RN408	2007-000078	BEAD ARRAY	30Ω	
CE302	T2203-CC105D	E CAPACITOR	100uF	10V M	RN409	2007-000078	BEAD ARRAY	30Ω	
CE402	2007-000109	E CAPACITOR	22uF	16V M	RN410	2007-000078	BEAD ARRAY	30Ω	
CE404	T2203-FC330D	E CAPACITOR	10uF	16V M	RN411	2007-000078	BEAD ARRAY	30Ω	
CE405	T2203-FC330D	E CAPACITOR	10uF	16V M	RN412	T1001-00049A	CHIP ARRAY	33Ω	1/16W J
CE407	T2203-FC330D	E CAPACITOR	10uF	16V M	RN413	T1001-00049A	CHIP ARRAY	33Ω	1/16W J
CE408	T2203-FC330D	E CAPACITOR	10uF	16V M	RN414	T1001-00049A	CHIP ARRAY	33Ω	1/16W J
CE410	T2203-FC221E	E CAPACITOR	470uF	16V M	RN415	T1001-00049A	CHIP ARRAY	33Ω	1/16W J
CE411	T2203-FC152D	E CAPACITOR	4.7uF	50V M	RN416	T1001-00049A	CHIP ARRAY	33Ω	1/16W J
CE412	T2203-FC330D	E CAPACITOR	10uF	16V M	RN417	T1001-00078A	CHIP ARRAY	33Ω	1/16W J
CE413	T2203-FC470D	E CAPACITOR	10uF	16V M	RN418	T1001-00078A	CHIP ARRAY	33Ω	1/16W J
CE414	T2203-FC152D	E CAPACITOR	4.7uF	50V M	RN503	2007-000081	BEAD ARRAY	30Ω	
CE415	T2203-FC470D	E CAPACITOR	10uF	16V M	RN505	2007-000081	BEAD ARRAY	30Ω	
CE416	T2203-FC152D	E CAPACITOR	4.7uF	50V M	RN508	2007-000081	BEAD ARRAY	30Ω	
CE502	T2203-FC104D	E CAPACITOR	220uF	16V M	RN509	2007-000081	BEAD ARRAY	30Ω	
CE503	2007-000097	E CAPACITOR	100uF	16V M	RN510	2007-000082	BEAD ARRAY	30Ω	
CE504	2007-000107	E CAPACITOR	47uF	16V M	RN511	2007-000082	BEAD ARRAY	30Ω	
CE506	2007-000109	E CAPACITOR	22uF	16V M	RN512	2007-000082	BEAD ARRAY	30Ω	
CE507	2007-000109	E CAPACITOR	22uF	16V M	RN513	2007-000078	BEAD ARRAY	30Ω	
CE508	2007-000102	E CAPACITOR	47uF	16V M	RN514	2007-000082	BEAD ARRAY	30Ω	
CE509	2007-000109	E CAPACITOR	22uF	16V M	RN515	2007-000123	BEAD ARRAY	30Ω	
CE510	T2007-HC330J	E CAPACITOR	22uF	16V M	RN516	2007-000123	BEAD ARRAY	30Ω	
CE511	T2007-HC330J	E CAPACITOR	22uF	16V M	RN517	2007-000123	BEAD ARRAY	30Ω	
CE512	T2007-HC330J	E CAPACITOR	22uF	16V M	RN518	2007-000123	BEAD ARRAY	30Ω	
CE513	T2007-HC330J	E CAPACITOR	22uF	16V M	RN519	2007-000123	BEAD ARRAY	30Ω	
CE514	T2007-HC330J	E CAPACITOR	22uF	16V M	RN520	2007-000081	BEAD ARRAY	30Ω	
CE515	T2007-HC472J	E CAPACITOR	22uF	16V M	X301	T2203-FC331D	CRYSTAL	6MHz	
CE516	T2007-HC472J	E CAPACITOR	22uF	16V M	X401	T2203-FC392D	CRYSTAL	27MHz	
CE517	T2203-FC470D	E CAPACITOR	10uF	16V M	X501	T2203-FC332D	CRYSTAL	14.318MHz	
CE518	2007-000097	E CAPACITOR	100uF	16V M	X601	T2203-FC334D	CRYSTAL	18.432MHz	
CE601	T2203-FC103D	E CAPACITOR	220uF	16V M					
CE602	T2203-FC103D	E CAPACITOR	220uF	16V M					
CE603	2007-000102	E CAPACITOR	47uF	16V M					
CE604	2007-000102	E CAPACITOR	47uF	16V M					
CE605	T2203-FC060D	E CAPACITOR	1uF	50V M					
CE606	T2203-CC105D	E CAPACITOR	100uF	10V M					
CE607	T2203-FC470D	E CAPACITOR	10uF	16V M					
CE608	T2203-FC470D	E CAPACITOR	10uF	16V M					
CE609	T2203-FC101D	E CAPACITOR	10uF	16V M					
CE610	T2203-FC101D	E CAPACITOR	10uF	16V M					
CE611	T2203-FC101D	E CAPACITOR	10uF	16V M					
CE612	2007-000102	E CAPACITOR	47uF	16V M					
CE613	T2203-FC101D	E CAPACITOR	10uF	16V M					
CE614	T2203-FC101D	E CAPACITOR	10uF	16V M					
CE617	T2203-FC102D	E CAPACITOR	10uF	16V M					
CE620	T2203-FC102D	E CAPACITOR	10uF	16V M					
CE621	T2203-FC102D	E CAPACITOR	10uF	16V M					
CE622	T2203-FC060D	E CAPACITOR	1uF	50V M					
CE623	T2203-FC060D	E CAPACITOR	1uF	50V M					
CE624	T2203-FC102D	E CAPACITOR	10uF	16V M					
CE625	T2203-FC060D	E CAPACITOR	1uF	50V M					
CE626	T2203-FC100D	E CAPACITOR	1uF	50V M					
CE627	2007-000102	E CAPACITOR	47uF	16V M					
CE630	T2007-HC472J	E CAPACITOR	22uF	16V M					
CE701	2007-000100	E CAPACITOR	100uF	16V M					
CE702	T2203-FC102D	E CAPACITOR	10uF	16V M					
CE703	2007-000100	E CAPACITOR	100uF	16V M					
CE704	2007-000100	E CAPACITOR	100uF	16V M					
CE705	T2203-FC100D	E CAPACITOR	1uF	50V M					
CE801	T2203-FC103D	E CAPACITOR	220uF	16V M					
CE802	T2203-FC221E	E CAPACITOR	470uF	16V M					
CE803	2007-000107	E CAPACITOR	47uF	16V M					
CE804	2007-000100	E CAPACITOR	100uF	16V M					
CE805	T2203-DC104E	E CAPACITOR	220uF	16V M					
CE808	T2203-FC104D	E CAPACITOR	220uF	16V M					
CE809	T2203-FC224D	E CAPACITOR	1000uF	10V M					
CE810	T2203-FC222D	E CAPACITOR	470uF	16V M					
CE811	T2203-DC104E	E CAPACITOR	220uF	16V M					
J101	2401-002594	CONNECTOR			D1	T0402-00012A	DIODE		
J102	T2401-CT221O	CONNECTOR			D2	T0402-00014A	DIODE		
J201	T2203-FC472D	JACK	PC IN		D4	T0407-00001A	DIODE		
J202	T2203-FC473D	JACK	EXT2		D5	T0407-00001A	DIODE		
J203	T2203-FC682D	JACK	EXT-1		D6	T0402-00013A	DIODE		
J205	T2203-FC104E	JACK	EXT-3/EXT4		D7	T0402-00013A	DIODE		
J209	T2401-FT0R1A	CONNECTOR			D8	T0402-00015A	DIODE		
J210	2401-000269	CONNECTOR			D9	T0402-00016A	DIODE		
J303	T2203-BC106E	CONNECTOR			D10	T0407-00001A	DIODE		
J304	2401-001495	CONNECTOR							

## POWER P.W. BOARD ASS'Y (QAL0826-001)

△Ref No.	Part No.	Part Name	Description	Local
FB2	T2901-JC008A	FERRITE BEAD		
FB3	T2901-JC008A	FERRITE BEAD		
FB4	T2901-JC008A	FERRITE BEAD		
FB5	T2901-JC008A	FERRITE BEAD		
FB6	T2901-JC008A	FERRITE BEAD		
FB7	T2901-JC008A	FERRITE BEAD		
FB8	T2901-JC008A	FERRITE BEAD		
FB9	T2901-IC009A	FERRITE BEAD		
Q1	T0507-00009A	TRANSISTOR		
Q2	T0507-00009A	TRANSISTOR		
Q3	T0507-00010A	TRANSISTOR		
Q4	T0501-00006A	POWER MOS FET		
Q5	T0501-00007A	POWER MOS FET		
Q6	T0507-00010A	TRANSISTOR		
Q7	T0501-00010A	TRANSISTOR		
Q8	T0501-00009A	POWER MOS FET		
Q9	T0507-00009A	TRANSISTOR		
Q10	T0507-00009A	TRANSISTOR		
Q11	T0507-00010A	TRANSISTOR		
Q12	T0501-00008A	POWER MOS FET		
Q13	T0507-00010A	TRANSISTOR		
Q14	T0507-00009A	TRANSISTOR		
U1	T1001-00091A	IC		
U2	T1001-00092A	IC		
U3	T1001-00096A	IC		
U4	T1001-00031A	IC		
U5	T1001-00092A	IC		
U6	T1001-00031A	IC		
U7	T1001-00093A	IC		
D1	T0402-00012A	DIODE		
D2	T0402-00014A	DIODE		
D4	T0407-00001A	DIODE		
D5	T0407-00001A	DIODE		
D6	T0402-00013A	DIODE		
D7	T0402-00013A	DIODE		
D8	T0402-00015A	DIODE		
D9	T0402-00016A	DIODE		
D10	T0407-00001A	DIODE		

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
D11	T0407-00001A	DIODE		R23	T2007-IC222J	C RESISTOR	2.2KΩ J
D12	T0402-00013A	DIODE		R24	T2007-JC470J	C RESISTOR	47Ω J
D14	T0402-00017A	DIODE		R25	T2007-IC103J	C RESISTOR	10KΩ J
D15	T0402-00017A	DIODE		R26	T2007-IC102J	C RESISTOR	1KΩ J
D16	T0407-00001A	DIODE		R27	T2003-ET823A	MF RESISTOR	82KΩ 3W J
D17	T0407-00001A	DIODE		R28	T2007-IC153J	C RESISTOR	15KΩ J
D18	T0407-00001A	DIODE		R29	T2007-IC222J	C RESISTOR	2.2KΩ J
C2	T2306-TB105A	F CAPACITOR	1uF 630V J	R30	T2007-IC153J	C RESISTOR	15KΩ J
C3	T2203-FC103E	C CAPACITOR	0.01uF 50V K	R31	T2007-IC102J	C RESISTOR	1KΩ J
C4	T2203-FC101E	C CAPACITOR	0.01uF 50V J	R32	T2007-IC153J	C RESISTOR	15KΩ J
C5	T2203-DC105E	C CAPACITOR	1uF 16V K	R33	T2003-CT4R7R	MF RESISTOR	4.7Ω 1W J
C6	T2203-DC105E	C CAPACITOR	1uF 16V K	R34	T2003-ET470A	MF RESISTOR	47Ω 3W J
C7	T2401-ET1000	E CAPACITOR	10uF 35V	R35	T2007-IC103J	C RESISTOR	10KΩ J
C8	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R36	T2007-IC103J	C RESISTOR	10KΩ J
C9	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R37	T2007-IC273J	C RESISTOR	27KΩ J
C10	T2201-PB103A	C CAPACITOR	0.01uF 1KV Z	R38	T2003-ET220A	MF RESISTOR	22Ω 3W J
C11	T2401-NB1500	E CAPACITOR	150uF 450V	R39	T2007-JC122J	C RESISTOR	1.2KΩ J
C12	T2401-FT2200	E CAPACITOR	22uF 50V	R40	T2007-IC392J	C RESISTOR	3.9KΩ J
C13	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R41	T2007-IC222J	C RESISTOR	2.2KΩ J
C14	T2203-FC102E	C CAPACITOR	1000pF 50V K	R42	T2007-IC471J	C RESISTOR	470Ω J
C15	T2203-FC102E	C CAPACITOR	1000pF 50V K	R43	T2007-IC222J	C RESISTOR	2.2KΩ J
C16	T2306-TB472A	F CAPACITOR	4700pF 630V K	R44	T2007-IC101J	C RESISTOR	100Ω J
C17	T2203-DC474E	C CAPACITOR	0.47uF 25V K	R45	T2007-IC101F	C RESISTOR	100Ω F
C18	T2401-ET1010	E CAPACITOR	100uF 35V	R46	T2007-IC202F	C RESISTOR	2KΩ F
C19	T2201-PB222A	C CAPACITOR	2200pF 1KV K	R47	T2007-IC202F	C RESISTOR	2KΩ F
C20	T2401-DT4710	E CAPACITOR	470uF 25V	R48	T2003-CT1R5R	MF RESISTOR	1.5Ω 1W J
C22	T2401-DT1020	E CAPACITOR	1000uF 25V	R49	T2007-IC153J	C RESISTOR	15KΩ J
C23	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R50	T2007-IC103J	C RESISTOR	10KΩ J
C24	T2201-PB102A	C CAPACITOR	1000pF 1KV K	R51	T2007-IC153J	C RESISTOR	15KΩ J
C25	T2401-BT3320	E CAPACITOR	3300uF 10V	R52	T2007-IC100J	C RESISTOR	10Ω J
C26	T2401-BT3320	E CAPACITOR	3300uF 10V	R53	T2007-JC470J	C RESISTOR	47Ω J
C27	T2401-BT1020	E CAPACITOR	1000uF 10V	R54	T2007-IC103J	C RESISTOR	10KΩ J
C28	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R55	T2003-ET224A	MF RESISTOR	220KΩ 3W J
C29	T2401-ET1010	E CAPACITOR	100uF 35V	R56	T2003-ET224A	MF RESISTOR	220KΩ 3W J
C30	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R57	T2007-IC123F	C RESISTOR	12KΩ F
C31	T2203-DC474E	C CAPACITOR	0.47uF 25V K	R58	T2007-IC153J	C RESISTOR	15KΩ J
C32	T2401-FT2200	E CAPACITOR	22uF 50V	R59	T2007-IC103J	C RESISTOR	10KΩ J
C33	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R60	T2003-ET220A	MF RESISTOR	22Ω 3W J
C34	T2203-FC102E	C CAPACITOR	1000pF 50V K	R61	T2007-IC153J	C RESISTOR	15KΩ J
C35	T2203-FC102E	C CAPACITOR	1000pF 50V K	R62	T2007-JC122J	C RESISTOR	1.2KΩ J
C36	T2203-FC102E	C CAPACITOR	1000pF 50V K	R63	T2007-JC122J	C RESISTOR	1.2KΩ J
C37	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R64	T2007-IC222J	C RESISTOR	2.2KΩ J
C38	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R65	T2007-IC101J	C RESISTOR	100Ω J
C39	T2306-TB472A	F CAPACITOR	4700pF 630V K	R66	T2007-IC153F	C RESISTOR	15KΩ F
C40	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R67	T2007-IC242F	C RESISTOR	2.4KΩ F
C41	T2201-PB102A	C CAPACITOR	1000pF 1KV K	R68	T2007-IC202F	C RESISTOR	2KΩ F
C42	T2401-ET2220	E CAPACITOR	2200uF 35V	R69	T2007-IC123F	C RESISTOR	12KΩ F
C43	T2401-ET2220	E CAPACITOR	2200uF 35V	R70	T2007-IC152J	C RESISTOR	1.5KΩ J
C44	T2401-ET1220	E CAPACITOR	1200uF 35V	R71	T2007-IC181J	C RESISTOR	180Ω J
C45	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R72	T2007-IC181J	C RESISTOR	180Ω J
C46	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R73	T2007-IC123F	C RESISTOR	12KΩ F
C47	T2203-DC474E	C CAPACITOR	0.47uF 25V K	R74	T2007-IC153J	C RESISTOR	15KΩ J
C48	T2203-DC474E	C CAPACITOR	0.47uF 25V K	R75	T2007-IC683J	C RESISTOR	68KΩ J
C49	T2203-FC104E	C CAPACITOR	0.1uF 50V K	R76	T2007-IC222J	C RESISTOR	2.2KΩ J
C50	T2401-ET1000	E CAPACITOR	10uF 35V	R77	T2007-IC562J	C RESISTOR	5.6KΩ J
C52	T2301-HT104A	F CAPACITOR	0.1uF 100V K	R78	T2007-JC331J	C RESISTOR	330Ω J
C21A	T2401-DT4710	E CAPACITOR	470uF 25V	R79	T2007-IC562J	C RESISTOR	5.6KΩ J
C21B	T2401-DT4710	E CAPACITOR	470uF 25V	R80	T2007-IC562J	C RESISTOR	5.6KΩ J
C27B	T2401-BT1020	E CAPACITOR	1000uF 10V	R81	T2007-IC153J	C RESISTOR	15KΩ J
△CX1	T2306-U 105A	F CAPACITOR	1uF 275V	R82	T2007-IC102J	C RESISTOR	1KΩ J
△CX3	T2306-U 474A	F CAPACITOR	0.47uF 275V	R83	T2007-IC153J	C RESISTOR	15KΩ J
△CX5	T2201-MB102A	C CAPACITOR	1000pF	R84	T2007-IC562J	C RESISTOR	5.6KΩ J
△CX6	T2201-MB102A	C CAPACITOR	1000pF	R85	T2007-IC102J	C RESISTOR	1KΩ J
△CY1	T2201-MB102A	C CAPACITOR	1000pF	R87	T2007-IC103J	C RESISTOR	10KΩ J
CY2	2201-000987	C CAPACITOR	2200pF	R88	T2007-IC222J	C RESISTOR	2.2KΩ J
R1	T2007-IC364J	C RESISTOR	360KΩ J	R89	T2007-IC102J	C RESISTOR	1KΩ J
R2	T2007-IC474J	C RESISTOR	470KΩ J	R34B	T2003-ET470A	MF RESISTOR	47Ω 3W J
R3	T2007-IC434J	C RESISTOR	430KΩ J	RX	T2007-JC564J	C RESISTOR	560KΩ J
R4	T2007-IC564J	C RESISTOR	560KΩ J	RX1	T2007-JC564J	C RESISTOR	560KΩ J
R5	T2007-IC123F	C RESISTOR	12KΩ F	RX2	T2007-JC564J	C RESISTOR	560KΩ J
R6	T2007-IC102J	C RESISTOR	1KΩ J	L1	TV49-00005A	CHOKE BAR	5.5uH
R6	T2007-IC273J	C RESISTOR	27KΩ J	L3	TV09-00004A	CHOKE BAR	5.0uH
R7	T2007-IC221J	C RESISTOR	220Ω J	L4	TA49-00004A	INDUCTOR FILTER	100uH 7A
R8	T2007-IC273J	C RESISTOR	27KΩ J	T1	TV26-3L01A	TRANSFOMER	
R9	T2007-IC222J	C RESISTOR	2.2KΩ J	T2	TV26-26L02A	TRANSFOMER	
R10	T2007-IC100J	C RESISTOR	10Ω J	T3	TV26-26L03A	TRANSFOMER	
R11	T2007-JC470J	C RESISTOR	47Ω J	BD1	T0402-00018A	BRIDGE-DIODE	
R12	T2007-IC102J	C RESISTOR	1KΩ J	△CN1	T3711-00039	CONNECTOR	
R13	T2007-IC304J	C RESISTOR	300KΩ J	CN2	T3711-00040	CONNECTOR	
R14	T2007-IC304J	C RESISTOR	300KΩ J	CN3	T3711-00041	CONNECTOR	
R15	T2007-IC304J	C RESISTOR	300KΩ J	△FU1	3601-000297	FUSE	250V 5A
R16	T2007-IC304J	C RESISTOR	300KΩ J	LF1	AB63-00012A	LINE FILTER	15mH 4A
R17	T2007-IC752F	C RESISTOR	7.5KΩ F	LF2	AB63-00012A	LINE FILTER	15mH 4A
R18	T2007-IC391J	C RESISTOR	390Ω J	NT1	T1404-00001A	THERMISTOR	
R19	T2007-IC471J	C RESISTOR	470Ω J	PC1	T1001-00094A	PHOTO COUPLER	
R20	T2007-IC682J	C RESISTOR	6.8KΩ J	PC2	T1001-00094A	PHOTO COUPLER	
R21	T2007-IC682J	C RESISTOR	6.8KΩ J	PC3	T1001-00094A	PHOTO COUPLER	
R22	T2007-IC682J	C RESISTOR	6.8KΩ J				

△Ref No.	Part No.	Part Name	Description Local
RC1	T2007-JC224J	C RESISTOR	220KΩ J
RC2	T2007-JC224J	C RESISTOR	220KΩ J
RC3	T2007-JC224J	C RESISTOR	220KΩ J
RS1	T2003-ETR15A	R-WIRE	0.2Ω 3W J
RS2	T2003-ETR62A	R-WIRE	0.62Ω 3W J
RS3	T2003-ET0R2A	R-WIRE	0.2Ω 3W J
SC1	T0501-00011A	SCR	0.8A 30V
△VX1	T1405-0011A	VARISTOR	
△VX4	T1405-0011A	VARISTOR	
ZD1	T0408-00007A	Z DIODE	
ZD2	T0408-00006A	Z DIODE	
ZD3	T0408-00008A	Z DIODE	
ZD4	T0408-00007A	Z DIODE	
ZD5	T0408-00005A	Z DIODE	
ZD6	T0408-00005A	Z DIODE	
ZD7	T0408-00005A	Z DIODE	
ZD8	T0408-00008A	Z DIODE	
ZD9	T0408-00007A	Z DIODE	
ZD10	T0408-00006A	Z DIODE	

### LED P.W. BOARD ASS'Y (QAL0827-001)

△Ref No.	Part No.	Part Name	Description Local
IR201	TA59-00037A	IR RECEIVER	
Q201	T0507-00001A	TRANSISTOR	
Q204	T0507-00001A	TRANSISTOR	
C237	T2203-FC102D	C CAPACITOR	1000pF 50V K
R201	2007-000084	C RESISTOR	4.7KΩ 1/16W J
R202	2007-000078	C RESISTOR	1KΩ 1/16W J
R203	2007-000309	C RESISTOR	10Ω 1/16W J
R204	2007-000081	C RESISTOR	2.7KΩ 1/16W J
R297	2007-000090	C RESISTOR	10KΩ 1/16W J
R298	2007-000090	C RESISTOR	10KΩ 1/16W J
CE201	2401-001495	E CAPACITOR	47uF 16V M
J210	T3711-00034	CONNECTOR	
J211	T3711-00034	CONNECTOR	
LD201	T0601-00002A	LED	POWER

### KEY P.W. BOARD ASS'Y (QAL0828-001)

△Ref No.	Part No.	Part Name	Description Local
D201	T0407-00004A	DIODE	
C246	T2203-FC332D	C CAPACITOR	3300pF 50V K
C247	T2203-FC332D	C CAPACITOR	3300pF 50V K
R205	2007-000122	C RESISTOR	1.2KΩ 1/16W J
R206	2007-000120	C RESISTOR	680Ω 1/16W J
R207	2007-000124	C RESISTOR	2.2KΩ 1/16W J
R208	2007-000122	C RESISTOR	1.2KΩ 1/16W J
R209	2007-000120	C RESISTOR	680Ω 1/16W J
R293	2007-000113	C RESISTOR	33Ω 1/16W J
L226	T2901-AC002A	CHIP BEAD	80Ω
L227	T2901-AC002A	CHIP BEAD	80Ω
L240	T2901-CC004A	CHIP BEAD	500Ω
J207	T3722-0043A	JACK	HEADPHONE
J209	T3711-00035	CONNECTOR	
S201	T3404-00004A	TACT SWITCH	POWER
S202	T3404-00004A	TACT SWITCH	TV/AV
S203	T3404-00004A	TACT SWITCH	MENU/OK
S204	T3404-00004A	TACT SWITCH	CH+
S205	T3404-00004A	TACT SWITCH	CH-
S206	T3404-00004A	TACT SWITCH	VOL+
S207	T3404-00004A	TACT SWITCH	VOL-
ZD228	T0408-00002A	Z DIODE	
ZD229	T0408-00002A	Z DIODE	

# PRINTED WIRING BOARD PARTS LIST [LT-26A61SJ, LT-26A61SU]

## MAIN P.W. BOARD ASS'Y (QAL0822-001)

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
U101	T1001-00081A	IC			ZD213	T2901-HC002A	Z DIODE		
U202	ATF02-26A61SJ	IC	(SERVICE)		ZD214	T2901-HC011A	Z DIODE		
U301	T1001-00073A-61	IC			ZD215	T2901-HC011A	Z DIODE		
U302	T1001-00064A	IC			ZD216	T2901-HC011A	Z DIODE		
U303	ATF32-26A61SJ	IC	(SERVICE)		ZD217	T2901-HC011A	Z DIODE		
U401	T1001-00084A	IC			ZD218	T2901-HC011A	Z DIODE		
U402	T1001-00085A	IC			ZD219	T2901-JC005A	Z DIODE		
U405	T1001-00075A	IC			ZD221	T2901-JC005A	Z DIODE		
U501	T1001-00086A	IC			ZD222	T2901-JC005A	Z DIODE		
U502	T1001-00063A	IC			ZD227	T2901-JC005A	Z DIODE		
U601	T1001-00087A	IC			ZD230	T2901-JC005A	Z DIODE		
U602	T1001-00088A	IC			ZD231	T2901-JC012B	Z DIODE		
U603	T1001-00070A	IC			ZD232	T2901-JC012B	Z DIODE		
U801	T0407-00004A	TRANSISTOR			ZD250	T2901-JC012B	Z DIODE		
U802	T0407-00004A	TRANSISTOR			ZD251	T2901-JC012B	Z DIODE		
Q101	T1001-00052A	IC			ZD252	T2901-JC012B	Z DIODE		
Q102	T0507-00001A	TRANSISTOR			ZD253	T2901-JC010B	Z DIODE		
Q103	T0507-00001A	TRANSISTOR			ZD254	T2901-JC010B	Z DIODE		
Q104	T0507-00001A	TRANSISTOR			ZD255	T2901-JC010B	Z DIODE		
Q105	T0507-00006A	TRANSISTOR			ZD256	T2901-JC010B	Z DIODE		
Q106	T0507-00001A	TRANSISTOR			ZD257	T2901-JC010B	Z DIODE		
Q202	T0507-00001A	TRANSISTOR			ZD258	T2901-JC004A	Z DIODE		
Q203	T0507-00005A	TRANSISTOR			ZD259	T2901-JC004A	Z DIODE		
Q301	T1001-00049A	IC			ZD260	T2901-JC004A	Z DIODE		
Q303	T1001-00078A	IC			ZD261	T2901-JC004A	Z DIODE		
Q304	T0507-00003A	TRANSISTOR			ZD262	T2901-JC004A	Z DIODE		
Q305	T0507-00003A	TRANSISTOR			ZD263	T2703-KC007A	Z DIODE		
Q306	T0507-00007A	TRANSISTOR			ZD264	T2703-KC007A	Z DIODE		
Q307	T0407-00003A	TRANSISTOR			ZD267	T2703-KC007A	Z DIODE		
Q308	T0507-00005A	TRANSISTOR			ZD270	T2703-KC007A	Z DIODE		
Q309	T0507-00005A	TRANSISTOR			ZD271	T2703-KC007A	Z DIODE		
Q311	T0507-00005A	TRANSISTOR			ZD280	T2703-KC014A	Z DIODE		
Q312	T0507-00006A	TRANSISTOR			ZD281	T2703-KC014A	Z DIODE		
Q315	T0507-00006A	TRANSISTOR			ZD702	T2703-JC011A	DIODE		
Q316	T0507-00005A	TRANSISTOR			ZD2213	T2703-KC014A	Z DIODE		
Q317	T0407-00003A	TRANSISTOR			ZD2214	T2703-KC014A	Z DIODE		
Q403	T0507-00006A	TRANSISTOR			ZD2215	T2703-KC014A	Z DIODE		
Q501	T1001-00079A	IC			ZD2216	T2703-LC010A	Z DIODE		
Q502	T1001-00048A	IC			ZD2274	T2703-LC010A	Z DIODE		
Q503	T0507-00007A	TRANSISTOR			C101	T0407-00002A	C CAPACITOR	100nF 25V K	
Q601	T0507-00006A	TRANSISTOR			C103	2007-000094	C CAPACITOR	10uF 10V Z	
Q602	T0507-00002A	TRANSISTOR			C105	2007-000093	C CAPACITOR	100nF 50V Z	
Q603	T0507-00002A	TRANSISTOR			C106	2007-000094	C CAPACITOR	10uF 10V Z	
Q604	T0407-00002A	TRANSISTOR			C107	2007-000094	C CAPACITOR	10uF 10V Z	
Q701	T0507-00002A	TRANSISTOR			C109	2007-000094	C CAPACITOR	10uF 10V Z	
Q702	T0507-00002A	TRANSISTOR			C110	2007-000094	C CAPACITOR	10uF 10V Z	
Q703	T0507-00002A	TRANSISTOR			C113	2007-000129	C CAPACITOR	10uF 10V Z	
Q801	T1001-00089A	IC			C201	T0507-00005A	C CAPACITOR	1nF 50V K	
Q802	T0507-00008A	TRANSISTOR			C202	2007-000081	C CAPACITOR	47nF 50V K	
Q804	T1001-00051A	IC			C203	2007-000081	C CAPACITOR	47nF 50V K	
Q805	T0507-00008A	TRANSISTOR			C204	2007-000081	C CAPACITOR	47nF 50V K	
Q806	T0507-00008A	TRANSISTOR			C205	2007-000081	C CAPACITOR	47nF 50V K	
Q2203	T0407-00002A	TRANSISTOR			C206	2007-000081	C CAPACITOR	47nF 50V K	
D101	T0408-00002A	DIODE			C207	2007-000082	C CAPACITOR	47nF 50V K	
D205	T2703-IC002A	Z DIODE			C208	2007-000082	C CAPACITOR	47nF 50V K	
D206	T2703-IC002A	Z DIODE			C209	2007-000082	C CAPACITOR	47nF 50V K	
D207	T2703-IC002A	Z DIODE			C210	T0507-00005A	C CAPACITOR	1nF 50V K	
D208	T2703-IC002A	Z DIODE			C211	2007-000082	C CAPACITOR	47nF 50V K	
D209	T2703-IC002A	Z DIODE			C213	T1001-00089A	C CAPACITOR	10pF 50V K	
D210	T2703-IC002A	Z DIODE			C214	T1001-00089A	C CAPACITOR	10pF 50V K	
D222	2007-000070	DIODE			C215	T1001-00089A	C CAPACITOR	10pF 50V K	
D223	2007-000070	DIODE			C216	2007-000120	C CAPACITOR	0.47nF 50V K	
D224	2007-000070	DIODE			C218	2007-000120	C CAPACITOR	0.47nF 50V K	
D225	2007-000070	DIODE			C219	2007-000120	C CAPACITOR	0.47nF 50V K	
D226	2007-000070	DIODE			C220	2007-000120	C CAPACITOR	0.47nF 50V K	
D227	2007-000882	DIODE			C221	2007-000120	C CAPACITOR	0.47nF 50V K	
D228	2007-000882	DIODE			C222	2007-000121	C CAPACITOR	0.47nF 50V K	
D229	2007-000882	DIODE			C223	2007-000121	C CAPACITOR	0.47nF 50V K	
D301	T0408-00002A	DIODE			C226	2007-000121	C CAPACITOR	0.47nF 50V K	
D601	T0408-00002A	DIODE			C227	2007-000082	C CAPACITOR	47nF 50V K	
D602	T0408-00002A	DIODE			C228	2007-000084	C CAPACITOR	47nF 50V K	
D702	T0408-00002A	DIODE			C229	2007-000084	C CAPACITOR	47nF 50V K	
D704	T0408-00002A	DIODE			C230	2007-000121	C CAPACITOR	0.47nF 50V K	
D801	T0407-00005A	DIODE			C233	2007-000121	C CAPACITOR	0.47nF 50V K	
ZD101	T0408-000009A	Z DIODE			C234	2007-000078	C CAPACITOR	0.47nF 50V K	
ZD202	T0408-000009A	Z DIODE			C235	2007-000078	C CAPACITOR	0.47nF 50V K	
ZD203	T0408-000009A	Z DIODE			C236	T1001-00089A	C CAPACITOR	10pF 50V K	
ZD204	T0408-000009A	Z DIODE			C238	T1001-00089A	C CAPACITOR	10pF 50V K	
ZD206	T0408-000009A	Z DIODE			C242	2007-000643	C CAPACITOR	0.33nF 50V K	
ZD209	T2901-HC002A	Z DIODE			C243	2007-000643	C CAPACITOR	0.33nF 50V K	
ZD210	T2901-HC002A	Z DIODE			C244	2007-000643	C CAPACITOR	0.33nF 50V K	
ZD211	T2901-HC002A	Z DIODE			C248	2007-000077	C CAPACITOR	330nF 16V Z	
ZD212	T2901-HC002A	Z DIODE			C249	2007-000077	C CAPACITOR	330nF 16V Z	
					C252	T0407-00002A	C CAPACITOR	100nF 25V K	
					C253	T0407-00002A	C CAPACITOR	100nF 25V K	
					C254	T0407-00002A	C CAPACITOR	100nF 25V K	

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C255	T0407-00002A	C CAPACITOR	100nF 25V K	C516	T2703-KC014A	C CAPACITOR	100nF 25V K
C256	T0407-00004A	C CAPACITOR	100nF 25V K	C517	T2703-LC010A	C CAPACITOR	100nF 25V K
C257	T0407-00004A	C CAPACITOR	100nF 25V K	C518	T2703-LC010A	C CAPACITOR	100nF 25V K
C258	T0407-00004A	C CAPACITOR	100nF 25V K	C519	T2703-LC010A	C CAPACITOR	100nF 25V K
C259	T0407-00004A	C CAPACITOR	100nF 25V K	C520	T2703-LC010A	C CAPACITOR	100nF 25V K
C301	T0407-00004A	C CAPACITOR	100nF 25V K	C524	T2703-LC010A	C CAPACITOR	100nF 25V K
C302	T0407-00003A	C CAPACITOR	100nF 25V K	C525	T2703-IC002A	C CAPACITOR	100nF 25V K
C303	T0407-00003A	C CAPACITOR	100nF 25V K	C526	T2703-IC002A	C CAPACITOR	100nF 25V K
C304	T0407-00003A	C CAPACITOR	100nF 25V K	C527	T2703-IC002A	C CAPACITOR	100nF 25V K
C305	T0407-00003A	C CAPACITOR	100nF 25V K	C528	T2703-IC002A	C CAPACITOR	100nF 25V K
C306	2007-000074	C CAPACITOR	0.22nF 50V K	C529	T2703-IC002A	C CAPACITOR	100nF 25V K
C307	T0507-00002A	C CAPACITOR	10nF 50V K	C530	T2703-IC002A	C CAPACITOR	100nF 25V K
C308	2007-000075	C CAPACITOR	220nF 50V K	C531	T2703-IC002A	C CAPACITOR	100nF 25V K
C309	T0407-00003A	C CAPACITOR	100nF 25V K	C532	T2703-IC002A	C CAPACITOR	100nF 25V K
C310	T0408-00002A	C CAPACITOR	100nF 25V K	C533	T2703-IC002A	C CAPACITOR	100nF 25V K
C311	T0507-00007A	C CAPACITOR	33pF 50V K	C534	T2703-IC002A	C CAPACITOR	100nF 25V K
C312	T0507-00001A	C CAPACITOR	0.1nF 50V K	C535	T2703-JC011A	C CAPACITOR	100nF 25V K
C313	T0507-00001A	C CAPACITOR	0.1nF 50V K	C536	T2703-JC011A	C CAPACITOR	100nF 25V K
C314	T0507-00001A	C CAPACITOR	0.1nF 50V K	C537	T2703-JC011A	C CAPACITOR	100nF 25V K
C316	T0507-00007A	C CAPACITOR	33pF 50V K	C538	T2703-JC011A	C CAPACITOR	100nF 25V K
C317	T0408-00002A	C CAPACITOR	100nF 25V K	C539	T2703-JC011A	C CAPACITOR	100nF 25V K
C318	T0408-00002A	C CAPACITOR	100nF 25V K	C540	2007-000070	C CAPACITOR	100nF 25V K
C319	T0408-00002A	C CAPACITOR	100nF 25V K	C541	2007-000070	C CAPACITOR	100nF 25V K
C402	T0408-00002A	C CAPACITOR	100nF 25V K	C543	2007-000070	C CAPACITOR	100nF 25V K
C403	T0408-00002A	C CAPACITOR	100nF 25V K	C544	2007-000070	C CAPACITOR	100nF 25V K
C404	T0408-00002A	C CAPACITOR	100nF 25V K	C545	2007-000070	C CAPACITOR	100nF 25V K
C405	T0408-00002A	C CAPACITOR	100nF 25V K	C546	2007-000882	C CAPACITOR	100nF 25V K
C406	T0408-00002A	C CAPACITOR	100nF 25V K	C548	2007-000882	C CAPACITOR	100nF 25V K
C407	T0408-00002A	C CAPACITOR	100nF 25V K	C549	2007-000882	C CAPACITOR	100nF 25V K
C409	T0407-00005A	C CAPACITOR	100nF 25V K	C550	T1001-00051A	C CAPACITOR	10pF 50V K
C411	T0407-00005A	C CAPACITOR	100nF 25V K	C552	2007-000882	C CAPACITOR	100nF 25V K
C412	T0407-00005A	C CAPACITOR	100nF 25V K	C553	T0507-00007A	C CAPACITOR	33pF 50V K
C413	T0407-00005A	C CAPACITOR	100nF 25V K	C554	T0507-00007A	C CAPACITOR	33pF 50V K
C414	T0407-00005A	C CAPACITOR	100nF 25V K	C555	2007-000882	C CAPACITOR	100nF 25V K
C415	T0408-000009A	C CAPACITOR	100nF 25V K	C556	T0507-00005A	C CAPACITOR	1nF 50V K
C416	T0408-000009A	C CAPACITOR	100nF 25V K	C557	T1001-00051A	C CAPACITOR	10pF 50V K
C417	T0408-000009A	C CAPACITOR	100nF 25V K	C559	2007-001134	C CAPACITOR	1uF 16V Z
C419	T0408-000009A	C CAPACITOR	100nF 25V K	C601	2007-000309	C CAPACITOR	100nF 25V K
C420	T0408-000009A	C CAPACITOR	100nF 25V K	C604	2007-000118	C CAPACITOR	3.3nF 50V K
C421	2007-000115	C CAPACITOR	1.5nF 50V K	C605	2007-000118	C CAPACITOR	3.3nF 50V K
C422	2007-000115	C CAPACITOR	1.5nF 50V K	C606	T1001-00048A	C CAPACITOR	6pF 50V K
C423	2007-000115	C CAPACITOR	1.5nF 50V K	C607	T1001-00048A	C CAPACITOR	6pF 50V K
C424	T0507-00001A	C CAPACITOR	0.1nF 50V K	C608	T0507-00006A	C CAPACITOR	47pF 50V K
C425	T0507-00003A	C CAPACITOR	22pF 50V K	C610	2007-000309	C CAPACITOR	100nF 25V K
C426	T0507-00003A	C CAPACITOR	22pF 50V K	C611	T0507-00006A	C CAPACITOR	47pF 50V K
C427	T2901-HC002A	C CAPACITOR	100nF 25V K	C612	T2203-FC100D	C RESISTOR	0Ω 1/16W J
C428	T2901-HC002A	C CAPACITOR	100nF 25V K	C614	2007-000123	C CAPACITOR	4.7nF 50V K
C429	T2901-HC002A	C CAPACITOR	100nF 25V K	C615	2007-000643	C CAPACITOR	0.33nF 50V K
C430	T2901-HC002A	C CAPACITOR	100nF 25V K	C616	2007-000643	C CAPACITOR	0.33nF 50V K
C431	T2901-HC002A	C CAPACITOR	100nF 25V K	C617	2007-000309	C CAPACITOR	100nF 25V K
C432	T2901-HC011A	C CAPACITOR	100nF 25V K	C618	T0507-00002A	C CAPACITOR	10nF 50V K
C433	T2901-HC011A	C CAPACITOR	100nF 25V K	C619	T0507-00002A	C CAPACITOR	10nF 50V K
C434	T2901-HC011A	C CAPACITOR	100nF 25V K	C620	T0507-00002A	C CAPACITOR	10nF 50V K
C435	T2901-HC011A	C CAPACITOR	100nF 25V K	C621	2007-000309	C CAPACITOR	100nF 25V K
C436	T1001-00051A	C CAPACITOR	10pF 50V K	C623	2007-000119	C CAPACITOR	3.9nF 50V K
C438	T2901-HC011A	C CAPACITOR	100nF 25V K	C624	2007-000119	C CAPACITOR	3.9nF 50V K
C439	T2901-JC005A	C CAPACITOR	100nF 25V K	C625	T0507-00005A	C CAPACITOR	1nF 50V K
C440	T2901-JC005A	C CAPACITOR	100nF 25V K	C626	2007-000076	C CAPACITOR	0.33nF 50V K
C441	T2901-JC005A	C CAPACITOR	100nF 25V K	C627	2007-000076	C CAPACITOR	0.33nF 50V K
C442	T2901-JC005A	C CAPACITOR	100nF 25V K	C632	2007-000076	C CAPACITOR	0.33nF 50V K
C443	T2901-JC005A	C CAPACITOR	100nF 25V K	C633	2007-000076	C CAPACITOR	0.33nF 50V K
C444	T2901-JC012B	C CAPACITOR	100nF 25V K	C634	2007-001134	C CAPACITOR	1uF 16V Z
C445	T2901-JC012B	C CAPACITOR	100nF 25V K	C635	2007-001134	C CAPACITOR	1uF 16V Z
C446	T2901-JC012B	C CAPACITOR	100nF 25V K	C636	T0507-00006A	C CAPACITOR	47pF 50V K
C447	T2901-JC012B	C CAPACITOR	100nF 25V K	C638	2007-000309	C CAPACITOR	100nF 25V K
C451	T0507-00002A	C CAPACITOR	10nF 50V K	C639	2007-000090	C CAPACITOR	6.8nF 50V K
C452	T2901-JC012B	C CAPACITOR	100nF 25V K	C640	2007-000090	C CAPACITOR	6.8nF 50V K
C453	T2901-JC010B	C CAPACITOR	100nF 25V K	C701	2007-000071	C CAPACITOR	100nF 25V K
C454	T2901-JC010B	C CAPACITOR	100nF 25V K	C702	2007-000071	C CAPACITOR	100nF 25V K
C455	2007-000078	C CAPACITOR	0.47nF 50V K	C703	T0507-00008A	C CAPACITOR	10nF 50V K
C456	T2901-JC010B	C CAPACITOR	100nF 25V K	C707	2007-000072	C CAPACITOR	100nF 50V K
C457	T2901-JC010B	C CAPACITOR	100nF 25V K	C710	2007-000084	C CAPACITOR	47nF 50V K
C458	T2901-JC010B	C CAPACITOR	100nF 25V K	C712	2007-001167	C CAPACITOR	0.15nF 50V K
C459	2007-001167	C CAPACITOR	0.15nF 50V K	C714	2007-000402	C CAPACITOR	2.2nF 50V K
C460	2007-001167	C CAPACITOR	0.15nF 50V K	C715	T0507-00005A	C CAPACITOR	1nF 50V K
C461	2007-000115	C CAPACITOR	1.5nF 50V K	C801	2007-000071	C CAPACITOR	100nF 25V K
C501	T2901-JC004A	C CAPACITOR	100nF 25V K	C802	2007-000071	C CAPACITOR	100nF 25V K
C502	T2901-JC004A	C CAPACITOR	100nF 25V K	C805	2007-000071	C CAPACITOR	100nF 25V K
C503	T2901-JC004A	C CAPACITOR	100nF 25V K	C806	2007-000113	C CAPACITOR	100nF 25V K
C504	T2901-JC004A	C CAPACITOR	100nF 25V K	C807	2007-000113	C CAPACITOR	100nF 25V K
C506	T2901-JC004A	C CAPACITOR	100nF 25V K	C820	2007-000113	C CAPACITOR	100nF 25V K
C507	T2703-KC007A	C CAPACITOR	100nF 25V K	C821	2007-000113	C CAPACITOR	100nF 25V K
C508	T2703-KC007A	C CAPACITOR	100nF 25V K	C2251	2007-000113	C CAPACITOR	100nF 25V K
C509	T2703-KC007A	C CAPACITOR	100nF 25V K	CA02	T0507-00006A	C CAPACITOR	47pF 50V K
C510	T2703-KC007A	C CAPACITOR	100nF 25V K	CA03	T0507-00006A	C CAPACITOR	47pF 50V K
C511	T2703-KC007A	C CAPACITOR	100nF 25V K				
C512	T2703-KC014A	C CAPACITOR	100nF 25V K	L301	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
C513	T2703-KC014A	C CAPACITOR	100nF 25V K	R101	2401-001363	C RESISTOR	330Ω 1/16W J
C514	T2703-KC014A	C CAPACITOR	100nF 25V K	R102	2401-001363	C RESISTOR	330Ω 1/16W J
C515	T2703-KC014A	C CAPACITOR	100nF 25V K	R104	2401-001363	C RESISTOR	330Ω 1/16W J



△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R107	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R310	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R108	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R313	2401-001495	C RESISTOR	100Ω 1/16W J
R109	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R314	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R110	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R315	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R114	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R316	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R115	2401-001363	C RESISTOR	330Ω 1/16W J	R317	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R119	2401-001363	C RESISTOR	330Ω 1/16W J	R318	T3711-00035	C RESISTOR	2.7KΩ 1/16W J
R121	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R319	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R123	T2401-CT4710	C RESISTOR	330Ω 1/16W J	R320	2401-001495	C RESISTOR	100Ω 1/16W J
R124	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R321	T3711-00035	C RESISTOR	2.7KΩ 1/16W J
R126	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R322	2401-001495	C RESISTOR	100Ω 1/16W J
R127	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R327	2401-001495	C RESISTOR	100Ω 1/16W J
R128	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R328	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R129	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R329	T2203-FC473D	C RESISTOR	75Ω 1/16W J
R130	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R330	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R131	T3711-00034	C RESISTOR	1.5KΩ 1/16W J	R331	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R132	T1001-00086A	C RESISTOR	47KΩ 1/16W J	R332	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R133	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R333	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R134	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R335	T1001-00084A	C RESISTOR	22KΩ 1/16W J
R136	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R336	T1001-00086A	C RESISTOR	47KΩ 1/16W J
R138	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R337	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R210	2401-002075	C RESISTOR	270Ω 1/16W J	R338	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R211	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R339	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R214	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R340	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R215	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R341	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R216	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R342	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R217	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R343	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R218	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R344	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R219	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R345	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R220	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R346	2401-000914	C RESISTOR	100Ω 1/16W J
R223	T2801-00011A	C RESISTOR	470Ω 1/16W J	R347	2401-000914	C RESISTOR	100Ω 1/16W J
R224	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R348	2401-000914	C RESISTOR	100Ω 1/16W J
R225	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R349	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R226	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R350	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R227	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R351	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R228	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R352	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R229	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R353	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R230	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R354	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R231	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R355	2401-000914	C RESISTOR	100Ω 1/16W J
R232	T2801-00011A	C RESISTOR	470Ω 1/16W J	R356	2401-000914	C RESISTOR	100Ω 1/16W J
R233	T2203-FC221E	C RESISTOR	33Ω 1/16W J	R357	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R235	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R358	2401-000603	C RESISTOR	100Ω 1/16W J
R236	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R359	2401-000603	C RESISTOR	100Ω 1/16W J
R237	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R360	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R238	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R361	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R239	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R363	T2801-00014A	C RESISTOR	680Ω 1/16W J
R242	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R364	T2203-FC102D	C RESISTOR	10Ω 1/16W J
R243	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R365	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R244	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R367	2401-000603	C RESISTOR	100Ω 1/16W J
R245	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R370	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R246	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R371	T2401-CT4710	C RESISTOR	330Ω 1/16W J
R247	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R373	2401-000603	C RESISTOR	100Ω 1/16W J
R248	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R375	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R249	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R376	2401-002075	C RESISTOR	270Ω 1/16W J
R255	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R377	T2203-FC060D	C RESISTOR	0Ω 1/16W J
R256	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R378	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R260	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R380	T1001-00083A	C RESISTOR	10KΩ 1/16W J
R261	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R382	2401-000603	C RESISTOR	100Ω 1/16W J
R262	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R383	T2801-00013A	C RESISTOR	560Ω 1/16W J
R263	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R385	2401-002235	C RESISTOR	100Ω 1/16W J
R264	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R390	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R267	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R391	T2203-FC060D	C RESISTOR	0Ω 1/16W J
R271	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R392	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R272	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R393	2401-002235	C RESISTOR	100Ω 1/16W J
R273	2401-002075	C RESISTOR	270Ω 1/16W J	R394	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R274	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R395	T2203-FC330D	C RESISTOR	0Ω 1/16W J
R275	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R396	T3711-00029	C RESISTOR	3.3KΩ 1/16W J
R277	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R397	T3711-00029	C RESISTOR	3.3KΩ 1/16W J
R278	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R411	T2801-00011A	C RESISTOR	470Ω 1/16W J
R279	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R412	T2203-FC334D	C RESISTOR	68Ω 1/16W J
R280	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R413	2401-002235	C RESISTOR	100Ω 1/16W J
R281	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R414	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R282	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R415	T2801-00014A	C RESISTOR	680Ω 1/16W J
R283	T2203-BC106E	C RESISTOR	82Ω 1/16W J	R416	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R285	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R417	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R286	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R418	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R287	T2203-FC470D	C RESISTOR	4.7Ω 1/16W J	R419	T2203-FC100D	C RESISTOR	0Ω 1/16W J
R288	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R427	T1001-00052A	C RESISTOR	1MΩ 1/16W J
R289	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R429	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R290	2401-000269	C RESISTOR	100Ω 1/16W J	R432	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R291	2401-000269	C RESISTOR	100Ω 1/16W J	R434	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R292	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R436	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R294	T2203-FC470D	C RESISTOR	4.7Ω 1/16W J	R442	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R295	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R456	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R296	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R457	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R299	T2203-FC221E	C RESISTOR	33Ω 1/16W J	R458	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R304	2401-000269	C RESISTOR	100Ω 1/16W J	R459	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R305	2401-000269	C RESISTOR	100Ω 1/16W J	R460	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R307	2401-000269	C RESISTOR	100Ω 1/16W J	R461	T1001-00070A	C RESISTOR	470KΩ 1/16W J
R308	2401-001495	C RESISTOR	100Ω 1/16W J	R462	T3711-00038	C RESISTOR	4.7KΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R501	T1001-00083A	C RESISTOR	10KΩ 1/16W J	R712	T1001-00088A	C RESISTOR	100KΩ 1/16W J
R504	T3711-00038	C RESISTOR	4.7KΩ 1/16W J	R713	T1001-00084A	C RESISTOR	22KΩ 1/16W J
R505	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R801	T1001-00083A	C RESISTOR	10KΩ 1/16W J
R509	2007-001167	CHIP BEAD	30Ω	R802	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R510	2007-001167	CHIP BEAD	30Ω	R803	2401-002075	C RESISTOR	270Ω 1/16W J
R511	2007-001167	CHIP BEAD	30Ω	R804	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R515	2007-001167	CHIP BEAD	30Ω	R805	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R516	2007-001167	CHIP BEAD	30Ω	R806	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R517	2007-000115	CHIP BEAD	30Ω	R810	T2203-FC220D	C RESISTOR	0Ω 1/16W J
R518	2007-000115	CHIP BEAD	30Ω	R2215	T2203-FC332D	C RESISTOR	47Ω 1/16W J
R519	2007-000115	CHIP BEAD	30Ω	R2219	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R529	T2203-FC100D	C RESISTOR	0Ω 1/16W J	R2220	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R540	T2203-FC102D	C RESISTOR	10Ω 1/16W J	R2221	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R541	2007-000115	CHIP BEAD	30Ω	R2222	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R542	2007-000115	CHIP BEAD	30Ω	R2223	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R543	2007-000074	CHIP BEAD	30Ω	R2224	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R544	T2203-FC104D	C RESISTOR	22Ω 1/16W J	R2225	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R546	2007-000074	CHIP BEAD	30Ω	R2226	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R548	2007-000074	CHIP BEAD	30Ω	R2227	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R550	2007-000074	CHIP BEAD	30Ω	R2228	T2203-FC150D	C RESISTOR	22Ω 1/16W J
R560	2007-000074	CHIP BEAD	30Ω	R2290	T3711-00033	C RESISTOR	1KΩ 1/16W J
R561	2007-000402	CHIP BEAD	30Ω	R2291	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R562	2007-000402	CHIP BEAD	30Ω	R2292	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R563	2007-000402	CHIP BEAD	30Ω	R2293	T1001-00081A	C RESISTOR	4.7KΩ 1/16W J
R565	2007-000402	CHIP BEAD	30Ω	RA01	T2203-FC220D	C RESISTOR	0Ω 1/16W J
R566	T2203-FC102D	C RESISTOR	10Ω 1/16W J	RA02	T2203-FC330D	C RESISTOR	0Ω 1/16W J
R567	2007-000402	CHIP BEAD	30Ω	RA03	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R568	T2203-FC102D	C RESISTOR	10Ω 1/16W J	RA04	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R571	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA05	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R572	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA06	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R573	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA07	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R574	2401-002235	C RESISTOR	100Ω 1/16W J	RA08	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R575	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA09	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R577	2007-000075	CHIP BEAD	30Ω	RA10	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R579	2007-000075	CHIP BEAD	30Ω	L201	2007-000309	CHIP BEAD	80Ω
R582	2007-000075	CHIP BEAD	30Ω	L202	2007-000309	CHIP BEAD	80Ω
R583	2007-000075	CHIP BEAD	30Ω	L203	2007-000309	CHIP BEAD	80Ω
R584	2007-000075	CHIP BEAD	30Ω	L204	2007-000309	CHIP BEAD	80Ω
R585	2007-000643	CHIP BEAD	30Ω	L205	2007-000309	CHIP BEAD	80Ω
R586	2007-000643	CHIP BEAD	30Ω	L206	2007-000071	CHIP BEAD	80Ω
R587	2007-000643	CHIP BEAD	30Ω	L207	2007-000071	CHIP BEAD	80Ω
R588	2007-000643	CHIP BEAD	30Ω	L208	2007-000071	CHIP BEAD	80Ω
R589	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L209	2007-000071	CHIP BEAD	80Ω
R591	2007-000643	CHIP BEAD	30Ω	L210	2007-000071	CHIP BEAD	80Ω
R592	2007-000076	CHIP BEAD	30Ω	L211	2007-000113	CHIP BEAD	80Ω
R593	T3722-00040A	C RESISTOR	1KΩ 1/16W J	L214	2007-000113	CHIP BEAD	80Ω
R594	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L215	2007-000113	CHIP BEAD	80Ω
R595	T3711-00038	C RESISTOR	4.7KΩ 1/16W J	L216	2007-000113	CHIP BEAD	80Ω
R596	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L217	2007-000113	CHIP BEAD	80Ω
R597	T2401-BT102A	C RESISTOR	390Ω 1/16W J	L218	2007-000072	CHIP BEAD	80Ω
R601	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L219	2007-000072	CHIP BEAD	80Ω
R602	T1001-00063A	C RESISTOR	68KΩ 1/16W J	L220	2007-000072	CHIP BEAD	80Ω
R603	2401-000242	C RESISTOR	150Ω 1/16W J	L221	2007-000072	CHIP BEAD	80Ω
R604	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L302	2007-000072	CHIP BEAD	80Ω
R605	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L303	2007-001134	CHIP BEAD	80Ω
R606	T1001-00086A	C RESISTOR	47KΩ 1/16W J	L304	2007-001134	CHIP BEAD	80Ω
R607	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L305	2007-001134	CHIP BEAD	80Ω
R608	T1001-00075A	C RESISTOR	30KΩ 1/16W J	L306	2007-000093	CHIP BEAD	500Ω
R609	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L317	T2007-HC330J	CHIP COIL	10uH
R610	T1001-00075A	C RESISTOR	30KΩ 1/16W J	L401	2007-000093	CHIP BEAD	500Ω
R611	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L402	2007-000093	CHIP BEAD	500Ω
R612	T1001-00086A	C RESISTOR	47KΩ 1/16W J	L404	2007-000093	CHIP BEAD	500Ω
R613	2401-002235	C RESISTOR	100Ω 1/16W J	L405	2007-000093	CHIP BEAD	500Ω
R614	2401-002594	C RESISTOR	100Ω 1/16W J	L406	2007-000094	CHIP BEAD	500Ω
R615	2401-002594	C RESISTOR	100Ω 1/16W J	L408	2007-000094	CHIP BEAD	500Ω
R616	2401-002594	C RESISTOR	100Ω 1/16W J	L501	2007-000094	CHIP BEAD	500Ω
R617	2401-002594	C RESISTOR	100Ω 1/16W J	L502	2007-000094	CHIP BEAD	500Ω
R618	2401-002594	C RESISTOR	100Ω 1/16W J	L504	2007-000094	CHIP BEAD	500Ω
R619	T2203-FC100D	C RESISTOR	0Ω 1/16W J	L505	2007-000129	CHIP BEAD	500Ω
R620	T2203-FC100D	C RESISTOR	0Ω 1/16W J	L507	2007-000129	CHIP BEAD	500Ω
R621	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L509	2007-000129	CHIP BEAD	500Ω
R622	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L510	2007-000129	CHIP BEAD	500Ω
R623	T1001-00083A	C RESISTOR	10KΩ 1/16W J	L511	2007-000129	CHIP BEAD	500Ω
R624	T1001-00082A	C RESISTOR	20KΩ 1/16W J	L512	2007-000096	CHIP BEAD	500Ω
R625	T3711-00033	C RESISTOR	1KΩ 1/16W J	L513	2007-000096	CHIP BEAD	500Ω
R629	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L514	2007-000096	CHIP BEAD	500Ω
R630	T1001-00082A	C RESISTOR	20KΩ 1/16W J	L515	2007-000096	CHIP BEAD	500Ω
R631	T1001-00083A	C RESISTOR	10KΩ 1/16W J	L516	2007-000096	CHIP BEAD	500Ω
R632	T2203-FC102D	C RESISTOR	10Ω 1/16W J	L517	2007-000097	CHIP BEAD	500Ω
R633	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L5VA	2007-000120	CHIP BEAD	80Ω
R701	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L5VB	2007-000120	CHIP BEAD	80Ω
R702	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L5VC	2007-000121	CHIP BEAD	80Ω
R703	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L601	T2007-HC472J	CHIP COIL	10uH
R704	T2801-00013A	C RESISTOR	560Ω 1/16W J	L602	T2007-HC472J	CHIP COIL	10uH
R705	T2801-00012A	C RESISTOR	820Ω 1/16W J	L603	2007-000097	CHIP BEAD	500Ω
R707	T2203-FC103D	C RESISTOR	10Ω 1/16W J	L606	2007-000097	CHIP BEAD	500Ω
R708	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L608	2007-000097	CHIP BEAD	500Ω
R709	T2203-FC103D	C RESISTOR	10Ω 1/16W J	L610	2007-000121	CHIP BEAD	80Ω
R710	T3711-00033	C RESISTOR	1KΩ 1/16W J	L701	2007-000109	CHIP COIL	10uH
R711	T2203-FC330D	C RESISTOR	0Ω 1/16W J				

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
L703	2007-000102	SMD COIL	680uH		CE626	T2203-FC100D	E CAPACITOR	1uF 50V M	
L705	2007-000100	SMD COIL	470uH		CE627	2007-000102	E CAPACITOR	47uF 16V M	
L801	2007-000118	CHIP BEAD	80Ω		CE630	T2007-HC472J	E CAPACITOR	22uF 16V M	
L802	2007-000118	CHIP BEAD	80Ω		CE701	2007-000100	E CAPACITOR	100uF 16V M	
L803	2007-000118	CHIP BEAD	80Ω		CE702	T2203-FC102D	E CAPACITOR	10uF 16V M	
L804	2007-000118	CHIP BEAD	80Ω		CE703	2007-000100	E CAPACITOR	100uF 16V M	
L805	2007-000118	CHIP BEAD	80Ω		CE704	2007-000100	E CAPACITOR	100uF 16V M	
L806	2007-000077	CHIP BEAD	80Ω		CE705	T2203-FC100D	E CAPACITOR	1uF 50V M	
L807	2007-000077	CHIP BEAD	80Ω		CE801	T2203-FC103D	E CAPACITOR	220uF 16V M	
L808	2007-000077	CHIP BEAD	80Ω		CE802	T2203-FC221E	E CAPACITOR	470uF 16V M	
L809	2007-000077	CHIP BEAD	80Ω		CE803	2007-000107	E CAPACITOR	47uF 16V M	
L810	2007-000077	CHIP BEAD	80Ω		CE804	2007-000100	E CAPACITOR	100uF 16V M	
L812	2007-000119	CHIP BEAD	80Ω		CE805	T2203-DC104E	E CAPACITOR	220uF 16V M	
L813	2007-000119	CHIP BEAD	80Ω		CE808	T2203-FC104D	E CAPACITOR	220uF 16V M	
L814	2007-000107	SMD COIL	100uH		CE809	T2203-FC224D	E CAPACITOR	1000uF 10V M	
L815	2007-000119	CHIP BEAD	80Ω		CE810	T2203-FC222D	E CAPACITOR	470uF 16V M	
L816	2007-000119	CHIP BEAD	80Ω		CE811	T2203-DC104E	E CAPACITOR	220uF 16V M	
L820	2007-000119	CHIP BEAD	80Ω		J101	2401-002594	CONNECTOR		
L821	2007-000120	CHIP BEAD	80Ω		J102	T2401-CT221O	CONNECTOR		
L822	2007-000120	CHIP BEAD	80Ω		J201	T2203-FC472D	JACK	PC IN	
L823	2007-000120	CHIP BEAD	80Ω		J202	T2203-FC473D	JACK	EXT2	
L830	T3711-00033	C RESISTOR	1KΩ 1/16W J		J203	T2203-FC682D	JACK	EXT-1	
LA01	2007-000121	CHIP BEAD	80Ω		J205	T2203-FC104E	JACK	EXT-3/EXT4	
LA02	2007-000121	CHIP BEAD	80Ω		J209	T2401-FT0R1A	CONNECTOR		
CE101	2007-000097	E CAPACITOR	100uF 16V M		J210	2401-000269	CONNECTOR		
CE102	2007-000107	E CAPACITOR	47uF 16V M		J303	T2203-BC106E	CONNECTOR		
CE103	2007-000109	E CAPACITOR	22uF 16V M		J304	2401-001495	CONNECTOR		
CE105	T2203-FC220D	E CAPACITOR	10uF 16V M		J501	2401-000603	CONNECTOR		
CE107	T2203-FC060D	E CAPACITOR	1uF 50V M		J601	T2401-CT470O	CONNECTOR		
CE108	2007-000096	E CAPACITOR	0.1uF 50V M		J602	2401-000914	CONNECTOR		
CE202	T2203-FC220D	E CAPACITOR	10uF 16V M		J801	2401-002235	CONNECTOR		
CE203	T2203-FC220D	E CAPACITOR	10uF 16V M		RN301	2007-000084	BEAD ARRAY	120Ω	
CE204	T2203-FC220D	E CAPACITOR	10uF 16V M		RN302	2007-000084	BEAD ARRAY	120Ω	
CE205	T2203-FC220D	E CAPACITOR	10uF 16V M		RN303	2007-000084	BEAD ARRAY	120Ω	
CE206	T2203-FC103D	E CAPACITOR	220uF 16V M		RN304	2007-000084	BEAD ARRAY	120Ω	
CE207	T2203-FC103D	E CAPACITOR	220uF 16V M		RN305	2007-000084	BEAD ARRAY	120Ω	
CE220	2007-000097	E CAPACITOR	100uF 16V M		RN306	2007-000090	BEAD ARRAY	120Ω	
CE221	2007-000097	E CAPACITOR	100uF 16V M		RN307	2007-000090	BEAD ARRAY	120Ω	
CE301	T2203-FC150D	E CAPACITOR	100uF 10V M		RN308	T1001-00079A	CHIP ARRAY	4.7KΩ 1/16W J	
CE302	T2203-CC105D	E CAPACITOR	100uF 10V M		RN309	2007-000090	BEAD ARRAY	120Ω	
CE402	2007-000109	E CAPACITOR	22uF 16V M		RN310	T1001-00079A	CHIP ARRAY	4.7KΩ 1/16W J	
CE404	T2203-FC330D	E CAPACITOR	10uF 16V M		RN408	2007-000078	BEAD ARRAY	30Ω	
CE405	T2203-FC330D	E CAPACITOR	10uF 16V M		RN409	2007-000078	BEAD ARRAY	30Ω	
CE407	T2203-FC330D	E CAPACITOR	10uF 16V M		RN410	2007-000078	BEAD ARRAY	30Ω	
CE408	T2203-FC330D	E CAPACITOR	10uF 16V M		RN411	2007-000078	BEAD ARRAY	30Ω	
CE410	T2203-FC221E	E CAPACITOR	470uF 16V M		RN412	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE411	T2203-FC152D	E CAPACITOR	4.7uF 50V M		RN413	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE412	T2203-FC330D	E CAPACITOR	10uF 16V M		RN414	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE413	T2203-FC470D	E CAPACITOR	10uF 16V M		RN415	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE414	T2203-FC152D	E CAPACITOR	4.7uF 50V M		RN416	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE415	T2203-FC470D	E CAPACITOR	10uF 16V M		RN417	T1001-00078A	CHIP ARRAY	33Ω 1/16W J	
CE416	T2203-FC152D	E CAPACITOR	4.7uF 50V M		RN418	T1001-00078A	CHIP ARRAY	33Ω 1/16W J	
CE502	T2203-FC104D	E CAPACITOR	220uF 16V M		RN503	2007-000081	BEAD ARRAY	30Ω	
CE503	2007-000097	E CAPACITOR	100uF 16V M		RN505	2007-000081	BEAD ARRAY	30Ω	
CE504	2007-000107	E CAPACITOR	47uF 16V M		RN508	2007-000081	BEAD ARRAY	30Ω	
CE506	2007-000109	E CAPACITOR	22uF 16V M		RN509	2007-000081	BEAD ARRAY	30Ω	
CE507	2007-000109	E CAPACITOR	22uF 16V M		RN510	2007-000082	BEAD ARRAY	30Ω	
CE508	2007-000102	E CAPACITOR	47uF 16V M		RN511	2007-000082	BEAD ARRAY	30Ω	
CE509	2007-000109	E CAPACITOR	22uF 16V M		RN512	2007-000082	BEAD ARRAY	30Ω	
CE510	T2007-HC330J	E CAPACITOR	22uF 16V M		RN513	2007-000078	BEAD ARRAY	30Ω	
CE511	T2007-HC330J	E CAPACITOR	22uF 16V M		RN514	2007-000082	BEAD ARRAY	30Ω	
CE512	T2007-HC330J	E CAPACITOR	22uF 16V M		RN515	2007-000123	BEAD ARRAY	30Ω	
CE513	T2007-HC330J	E CAPACITOR	22uF 16V M		RN516	2007-000123	BEAD ARRAY	30Ω	
CE514	T2007-HC330J	E CAPACITOR	22uF 16V M		RN517	2007-000123	BEAD ARRAY	30Ω	
CE515	T2007-HC472J	E CAPACITOR	22uF 16V M		RN518	2007-000123	BEAD ARRAY	30Ω	
CE516	T2007-HC472J	E CAPACITOR	22uF 16V M		RN519	2007-000123	BEAD ARRAY	30Ω	
CE517	T2203-FC470D	E CAPACITOR	10uF 16V M		RN520	2007-000081	BEAD ARRAY	30Ω	
CE518	2007-000097	E CAPACITOR	100uF 16V M		X301	T2203-FC331D	CRYSTAL	6MHz	
CE601	T2203-FC103D	E CAPACITOR	220uF 16V M		X401	T2203-FC392D	CRYSTAL	27MHz	
CE602	T2203-FC103D	E CAPACITOR	220uF 16V M		X501	T2203-FC332D	CRYSTAL	14.318MHz	
CE603	2007-000102	E CAPACITOR	47uF 16V M		X601	T2203-FC334D	CRYSTAL	18.432MHz	
CE604	2007-000102	E CAPACITOR	47uF 16V M						
CE605	T2203-FC060D	E CAPACITOR	1uF 50V M						
CE606	T2203-CC105D	E CAPACITOR	100uF 10V M						
CE607	T2203-FC470D	E CAPACITOR	10uF 16V M						
CE608	T2203-FC470D	E CAPACITOR	10uF 16V M						
CE609	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE610	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE611	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE612	2007-000102	E CAPACITOR	47uF 16V M						
CE613	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE614	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE617	T2203-FC102D	E CAPACITOR	10uF 16V M						
CE620	T2203-FC102D	E CAPACITOR	10uF 16V M						
CE621	T2203-FC102D	E CAPACITOR	10uF 16V M						
CE622	T2203-FC060D	E CAPACITOR	1uF 50V M						
CE623	T2203-FC060D	E CAPACITOR	1uF 50V M						
CE624	T2203-FC102D	E CAPACITOR	10uF 16V M						
CE625	T2203-FC060D	E CAPACITOR	1uF 50V M						

## POWER P.W. BOARD ASS'Y (QAL0826-001)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

## LED P.W. BOARD ASS'Y (QAL0827-001)

REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.

## KEY P.W. BOARD ASS'Y (QAL0828-001)

REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.

# PRINTED WIRING BOARD PARTS LIST [LT-32A61BJ, LT-32A61BU, LT-32A61SU/c]

## MAIN P.W. BOARD ASS'Y (QAL0825-001)

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
U101	T1001-00081A	IC		ZD213	T2901-HC002A	Z DIODE	
U202	ATF02-32A61BJ	IC	(SERVICE)	ZD214	T2901-HC011A	Z DIODE	
U301	T1001-00073A-61	IC		ZD215	T2901-HC011A	Z DIODE	
U302	T1001-00064A	IC		ZD216	T2901-HC011A	Z DIODE	
U303	ATF32-32A61BJ	IC	(SERVICE)	ZD217	T2901-HC011A	Z DIODE	
U401	T1001-00084A	IC		ZD218	T2901-HC011A	Z DIODE	
U402	T1001-00085A	IC		ZD219	T2901-JC005A	Z DIODE	
U405	T1001-00075A	IC		ZD221	T2901-JC005A	Z DIODE	
U501	T1001-00086A	IC		ZD222	T2901-JC005A	Z DIODE	
U502	T1001-00063A	IC		ZD227	T2901-JC005A	Z DIODE	
U601	T1001-00087A	IC		ZD230	T2901-JC005A	Z DIODE	
U602	T1001-00088A	IC		ZD231	T2901-JC012B	Z DIODE	
U603	T1001-00070A	IC		ZD232	T2901-JC012B	Z DIODE	
U801	T0407-00004A	TRANSISTOR		ZD250	T2901-JC012B	Z DIODE	
U802	T0407-00004A	TRANSISTOR		ZD251	T2901-JC012B	Z DIODE	
				ZD252	T2901-JC012B	Z DIODE	
				ZD253	T2901-JC010B	Z DIODE	
				ZD254	T2901-JC010B	Z DIODE	
Q101	T1001-00052A	IC		ZD255	T2901-JC010B	Z DIODE	
Q102	T0507-00001A	TRANSISTOR		ZD256	T2901-JC010B	Z DIODE	
Q103	T0507-00001A	TRANSISTOR		ZD257	T2901-JC010B	Z DIODE	
Q104	T0507-00001A	TRANSISTOR		ZD258	T2901-JC004A	Z DIODE	
Q105	T0507-00006A	TRANSISTOR		ZD259	T2901-JC004A	Z DIODE	
Q106	T0507-00001A	TRANSISTOR		ZD260	T2901-JC004A	Z DIODE	
Q202	T0507-00001A	TRANSISTOR		ZD261	T2901-JC004A	Z DIODE	
Q203	T0507-00005A	TRANSISTOR		ZD262	T2901-JC004A	Z DIODE	
Q301	T1001-00049A	IC		ZD263	T2703-KC007A	Z DIODE	
Q303	T1001-00078A	IC		ZD264	T2703-KC007A	Z DIODE	
Q304	T0507-00003A	TRANSISTOR		ZD267	T2703-KC007A	Z DIODE	
Q305	T0507-00003A	TRANSISTOR		ZD270	T2703-KC007A	Z DIODE	
Q306	T0507-00007A	TRANSISTOR		ZD271	T2703-KC007A	Z DIODE	
Q307	T0407-00003A	TRANSISTOR		ZD280	T2703-KC014A	Z DIODE	
Q308	T0507-00005A	TRANSISTOR		ZD281	T2703-KC014A	Z DIODE	
Q309	T0507-00005A	TRANSISTOR		ZD702	T2703-JC011A	DIODE	
Q311	T0507-00005A	TRANSISTOR		ZD2213	T2703-KC014A	Z DIODE	
Q312	T0507-00006A	TRANSISTOR		ZD2214	T2703-KC014A	Z DIODE	
Q315	T0507-00006A	TRANSISTOR		ZD2215	T2703-KC014A	Z DIODE	
Q316	T0507-00005A	TRANSISTOR		ZD2216	T2703-LC010A	Z DIODE	
Q317	T0407-00003A	TRANSISTOR		ZD2274	T2703-LC010A	Z DIODE	
Q403	T0507-00006A	TRANSISTOR					
Q501	T1001-00079A	IC		C101	T0407-00002A	C CAPACITOR	100nF 25V K
Q502	T1001-00048A	IC		C103	2007-000094	C CAPACITOR	10uF 10V Z
Q503	T0507-00007A	TRANSISTOR		C105	2007-000093	C CAPACITOR	100nF 50V Z
Q601	T0507-00006A	TRANSISTOR		C106	2007-000094	C CAPACITOR	10uF 10V Z
Q602	T0507-00002A	TRANSISTOR		C107	2007-000094	C CAPACITOR	10uF 10V Z
Q603	T0507-00002A	TRANSISTOR		C109	2007-000094	C CAPACITOR	10uF 10V Z
Q604	T0407-00002A	TRANSISTOR		C110	2007-000094	C CAPACITOR	10uF 10V Z
Q701	T0507-00002A	TRANSISTOR		C113	2007-000129	C CAPACITOR	10uF 10V Z
Q702	T0507-00002A	TRANSISTOR		C201	T0507-00005A	C CAPACITOR	1nF 50V K
Q703	T0507-00002A	TRANSISTOR		C202	2007-000081	C CAPACITOR	47nF 50V K
Q801	T1001-00089A	IC		C203	2007-000081	C CAPACITOR	47nF 50V K
Q802	T0507-00008A	TRANSISTOR		C204	2007-000081	C CAPACITOR	47nF 50V K
Q804	T1001-00051A	IC		C205	2007-000081	C CAPACITOR	47nF 50V K
Q805	T0507-00008A	TRANSISTOR		C206	2007-000081	C CAPACITOR	47nF 50V K
Q806	T0507-00008A	TRANSISTOR		C207	2007-000082	C CAPACITOR	47nF 50V K
Q2203	T0407-00002A	TRANSISTOR		C208	2007-000082	C CAPACITOR	47nF 50V K
				C209	2007-000082	C CAPACITOR	47nF 50V K
D101	T0408-00002A	DIODE		C210	T0507-00005A	C CAPACITOR	1nF 50V K
D205	T2703-IC002A	Z DIODE		C211	2007-000082	C CAPACITOR	47nF 50V K
D206	T2703-IC002A	Z DIODE		C213	T1001-00089A	C CAPACITOR	10pF 50V K
D207	T2703-IC002A	Z DIODE		C214	T1001-00089A	C CAPACITOR	10pF 50V K
D208	T2703-IC002A	Z DIODE		C215	T1001-00089A	C CAPACITOR	10pF 50V K
D209	T2703-IC002A	Z DIODE		C216	2007-000120	C CAPACITOR	0.47nF 50V K
D210	T2703-IC002A	Z DIODE		C218	2007-000120	C CAPACITOR	0.47nF 50V K
D222	2007-000070	DIODE		C219	2007-000120	C CAPACITOR	0.47nF 50V K
D223	2007-000070	DIODE		C220	2007-000120	C CAPACITOR	0.47nF 50V K
D224	2007-000070	DIODE		C221	2007-000120	C CAPACITOR	0.47nF 50V K
D225	2007-000070	DIODE		C222	2007-000121	C CAPACITOR	0.47nF 50V K
D226	2007-000070	DIODE		C223	2007-000121	C CAPACITOR	0.47nF 50V K
D227	2007-000882	DIODE		C226	2007-000121	C CAPACITOR	0.47nF 50V K
D228	2007-000882	DIODE		C227	2007-000082	C CAPACITOR	47nF 50V K
D229	2007-000882	DIODE		C228	2007-000084	C CAPACITOR	47nF 50V K
D301	T0408-00002A	DIODE		C229	2007-000084	C CAPACITOR	47nF 50V K
D601	T0408-00002A	DIODE		C230	2007-000121	C CAPACITOR	0.47nF 50V K
D602	T0408-00002A	DIODE		C233	2007-000121	C CAPACITOR	0.47nF 50V K
D702	T0408-00002A	DIODE		C234	2007-000078	C CAPACITOR	0.47nF 50V K
D704	T0408-00002A	DIODE		C235	2007-000078	C CAPACITOR	0.47nF 50V K
D801	T0407-00005A	DIODE		C236	T1001-00089A	C CAPACITOR	10pF 50V K
ZD101	T0408-000009A	Z DIODE		C238	T1001-00089A	C CAPACITOR	10pF 50V K
ZD202	T0408-000009A	Z DIODE		C242	2007-000643	C CAPACITOR	0.33nF 50V K
ZD203	T0408-000009A	Z DIODE		C243	2007-000643	C CAPACITOR	0.33nF 50V K
ZD204	T0408-000009A	Z DIODE		C244	2007-000643	C CAPACITOR	0.33nF 50V K
ZD206	T0408-000009A	Z DIODE		C248	2007-000077	C CAPACITOR	330nF 16V Z
ZD209	T2901-HC002A	Z DIODE		C249	2007-000077	C CAPACITOR	330nF 16V Z
ZD210	T2901-HC002A	Z DIODE		C252	T0407-00002A	C CAPACITOR	100nF 25V K
ZD211	T2901-HC002A	Z DIODE		C253	T0407-00002A	C CAPACITOR	100nF 25V K
ZD212	T2901-HC002A	Z DIODE		C254	T0407-00002A	C CAPACITOR	100nF 25V K

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C255	T0407-00002A	C CAPACITOR	100nF 25V K	C516	T2703-KC014A	C CAPACITOR	100nF 25V K
C256	T0407-00004A	C CAPACITOR	100nF 25V K	C517	T2703-LC010A	C CAPACITOR	100nF 25V K
C257	T0407-00004A	C CAPACITOR	100nF 25V K	C518	T2703-LC010A	C CAPACITOR	100nF 25V K
C258	T0407-00004A	C CAPACITOR	100nF 25V K	C519	T2703-LC010A	C CAPACITOR	100nF 25V K
C259	T0407-00004A	C CAPACITOR	100nF 25V K	C520	T2703-LC010A	C CAPACITOR	100nF 25V K
C301	T0407-00004A	C CAPACITOR	100nF 25V K	C524	T2703-LC010A	C CAPACITOR	100nF 25V K
C302	T0407-00003A	C CAPACITOR	100nF 25V K	C525	T2703-IC002A	C CAPACITOR	100nF 25V K
C303	T0407-00003A	C CAPACITOR	100nF 25V K	C526	T2703-IC002A	C CAPACITOR	100nF 25V K
C304	T0407-00003A	C CAPACITOR	100nF 25V K	C527	T2703-IC002A	C CAPACITOR	100nF 25V K
C305	T0407-00003A	C CAPACITOR	100nF 25V K	C528	T2703-IC002A	C CAPACITOR	100nF 25V K
C306	2007-000074	C CAPACITOR	0.22nF 50V K	C529	T2703-IC002A	C CAPACITOR	100nF 25V K
C307	T0507-00002A	C CAPACITOR	10nF 50V K	C530	T2703-IC002A	C CAPACITOR	100nF 25V K
C308	2007-000075	C CAPACITOR	220nF 50V K	C531	T2703-IC002A	C CAPACITOR	100nF 25V K
C309	T0407-00003A	C CAPACITOR	100nF 25V K	C532	T2703-IC002A	C CAPACITOR	100nF 25V K
C310	T0408-00002A	C CAPACITOR	100nF 25V K	C533	T2703-IC002A	C CAPACITOR	100nF 25V K
C311	T0507-00007A	C CAPACITOR	33pF 50V K	C534	T2703-IC002A	C CAPACITOR	100nF 25V K
C312	T0507-00001A	C CAPACITOR	0.1nF 50V K	C535	T2703-JC011A	C CAPACITOR	100nF 25V K
C313	T0507-00001A	C CAPACITOR	0.1nF 50V K	C536	T2703-JC011A	C CAPACITOR	100nF 25V K
C314	T0507-00001A	C CAPACITOR	0.1nF 50V K	C537	T2703-JC011A	C CAPACITOR	100nF 25V K
C316	T0507-00007A	C CAPACITOR	33pF 50V K	C538	T2703-JC011A	C CAPACITOR	100nF 25V K
C317	T0408-00002A	C CAPACITOR	100nF 25V K	C539	T2703-JC011A	C CAPACITOR	100nF 25V K
C318	T0408-00002A	C CAPACITOR	100nF 25V K	C540	2007-000070	C CAPACITOR	100nF 25V K
C319	T0408-00002A	C CAPACITOR	100nF 25V K	C541	2007-000070	C CAPACITOR	100nF 25V K
C402	T0408-00002A	C CAPACITOR	100nF 25V K	C543	2007-000070	C CAPACITOR	100nF 25V K
C403	T0408-00002A	C CAPACITOR	100nF 25V K	C544	2007-000070	C CAPACITOR	100nF 25V K
C404	T0408-00002A	C CAPACITOR	100nF 25V K	C545	2007-000070	C CAPACITOR	100nF 25V K
C405	T0408-00002A	C CAPACITOR	100nF 25V K	C546	2007-000882	C CAPACITOR	100nF 25V K
C406	T0408-00002A	C CAPACITOR	100nF 25V K	C548	2007-000882	C CAPACITOR	100nF 25V K
C407	T0408-00002A	C CAPACITOR	100nF 25V K	C549	2007-000882	C CAPACITOR	100nF 25V K
C409	T0407-00005A	C CAPACITOR	100nF 25V K	C550	T1001-00051A	C CAPACITOR	10pF 50V K
C411	T0407-00005A	C CAPACITOR	100nF 25V K	C552	2007-000882	C CAPACITOR	100nF 25V K
C412	T0407-00005A	C CAPACITOR	100nF 25V K	C553	T0507-00007A	C CAPACITOR	33pF 50V K
C413	T0407-00005A	C CAPACITOR	100nF 25V K	C554	T0507-00007A	C CAPACITOR	33pF 50V K
C414	T0407-00005A	C CAPACITOR	100nF 25V K	C555	2007-000882	C CAPACITOR	100nF 25V K
C415	T0408-000009A	C CAPACITOR	100nF 25V K	C556	T0507-00005A	C CAPACITOR	1nF 50V K
C416	T0408-000009A	C CAPACITOR	100nF 25V K	C557	T1001-00051A	C CAPACITOR	10pF 50V K
C417	T0408-000009A	C CAPACITOR	100nF 25V K	C559	2007-001134	C CAPACITOR	1uF 16V Z
C419	T0408-000009A	C CAPACITOR	100nF 25V K	C601	2007-000309	C CAPACITOR	100nF 25V K
C420	T0408-000009A	C CAPACITOR	100nF 25V K	C604	2007-000118	C CAPACITOR	3.3nF 50V K
C421	2007-000115	C CAPACITOR	1.5nF 50V K	C605	2007-000118	C CAPACITOR	3.3nF 50V K
C422	2007-000115	C CAPACITOR	1.5nF 50V K	C606	T1001-00048A	C CAPACITOR	6pF 50V K
C423	2007-000115	C CAPACITOR	1.5nF 50V K	C607	T1001-00048A	C CAPACITOR	6pF 50V K
C424	T0507-00001A	C CAPACITOR	0.1nF 50V K	C608	T0507-00006A	C CAPACITOR	47pF 50V K
C425	T0507-00003A	C CAPACITOR	22pF 50V K	C610	2007-000309	C CAPACITOR	100nF 25V K
C426	T0507-00003A	C CAPACITOR	22pF 50V K	C611	T0507-00006A	C CAPACITOR	47pF 50V K
C427	T2901-HC002A	C CAPACITOR	100nF 25V K	C612	T2203-FC100D	C RESISTOR	0Ω 1/16W J
C428	T2901-HC002A	C CAPACITOR	100nF 25V K	C614	2007-000123	C CAPACITOR	4.7nF 50V K
C429	T2901-HC002A	C CAPACITOR	100nF 25V K	C615	2007-000643	C CAPACITOR	0.33nF 50V K
C430	T2901-HC002A	C CAPACITOR	100nF 25V K	C616	2007-000643	C CAPACITOR	0.33nF 50V K
C431	T2901-HC002A	C CAPACITOR	100nF 25V K	C617	2007-000309	C CAPACITOR	100nF 25V K
C432	T2901-HC011A	C CAPACITOR	100nF 25V K	C618	T0507-00002A	C CAPACITOR	10nF 50V K
C433	T2901-HC011A	C CAPACITOR	100nF 25V K	C619	T0507-00002A	C CAPACITOR	10nF 50V K
C434	T2901-HC011A	C CAPACITOR	100nF 25V K	C620	T0507-00002A	C CAPACITOR	10nF 50V K
C435	T2901-HC011A	C CAPACITOR	100nF 25V K	C621	2007-000309	C CAPACITOR	100nF 25V K
C436	T1001-00051A	C CAPACITOR	10pF 50V K	C623	2007-000119	C CAPACITOR	3.9nF 50V K
C438	T2901-HC011A	C CAPACITOR	100nF 25V K	C624	2007-000119	C CAPACITOR	3.9nF 50V K
C439	T2901-JC005A	C CAPACITOR	100nF 25V K	C625	T0507-00005A	C CAPACITOR	1nF 50V K
C440	T2901-JC005A	C CAPACITOR	100nF 25V K	C626	2007-000076	C CAPACITOR	0.33nF 50V K
C441	T2901-JC005A	C CAPACITOR	100nF 25V K	C627	2007-000076	C CAPACITOR	0.33nF 50V K
C442	T2901-JC005A	C CAPACITOR	100nF 25V K	C632	2007-000076	C CAPACITOR	0.33nF 50V K
C443	T2901-JC005A	C CAPACITOR	100nF 25V K	C633	2007-000076	C CAPACITOR	0.33nF 50V K
C444	T2901-JC012B	C CAPACITOR	100nF 25V K	C634	2007-001134	C CAPACITOR	1uF 16V Z
C445	T2901-JC012B	C CAPACITOR	100nF 25V K	C635	2007-001134	C CAPACITOR	1uF 16V Z
C446	T2901-JC012B	C CAPACITOR	100nF 25V K	C636	T0507-00006A	C CAPACITOR	47pF 50V K
C447	T2901-JC012B	C CAPACITOR	100nF 25V K	C638	2007-000309	C CAPACITOR	100nF 25V K
C451	T0507-00002A	C CAPACITOR	10nF 50V K	C639	2007-000090	C CAPACITOR	6.8nF 50V K
C452	T2901-JC012B	C CAPACITOR	100nF 25V K	C640	2007-000090	C CAPACITOR	6.8nF 50V K
C453	T2901-JC010B	C CAPACITOR	100nF 25V K	C701	2007-000071	C CAPACITOR	100nF 25V K
C454	T2901-JC010B	C CAPACITOR	100nF 25V K	C702	2007-000071	C CAPACITOR	100nF 25V K
C455	2007-000078	C CAPACITOR	0.47nF 50V K	C703	T0507-00008A	C CAPACITOR	10nF 50V K
C456	T2901-JC010B	C CAPACITOR	100nF 25V K	C707	2007-000072	C CAPACITOR	100nF 50V K
C457	T2901-JC010B	C CAPACITOR	100nF 25V K	C710	2007-000084	C CAPACITOR	47nF 50V K
C458	T2901-JC010B	C CAPACITOR	100nF 25V K	C712	2007-001167	C CAPACITOR	0.15nF 50V K
C459	2007-001167	C CAPACITOR	0.15nF 50V K	C714	2007-000402	C CAPACITOR	2.2nF 50V K
C460	2007-001167	C CAPACITOR	0.15nF 50V K	C715	T0507-00005A	C CAPACITOR	1nF 50V K
C461	2007-000115	C CAPACITOR	1.5nF 50V K	C801	2007-000071	C CAPACITOR	100nF 25V K
C501	T2901-JC004A	C CAPACITOR	100nF 25V K	C802	2007-000071	C CAPACITOR	100nF 25V K
C502	T2901-JC004A	C CAPACITOR	100nF 25V K	C805	2007-000071	C CAPACITOR	100nF 25V K
C503	T2901-JC004A	C CAPACITOR	100nF 25V K	C806	2007-000113	C CAPACITOR	100nF 25V K
C504	T2901-JC004A	C CAPACITOR	100nF 25V K	C807	2007-000113	C CAPACITOR	100nF 25V K
C506	T2901-JC004A	C CAPACITOR	100nF 25V K	C820	2007-000113	C CAPACITOR	100nF 25V K
C507	T2703-KC007A	C CAPACITOR	100nF 25V K	C821	2007-000113	C CAPACITOR	100nF 25V K
C508	T2703-KC007A	C CAPACITOR	100nF 25V K	C2251	2007-000113	C CAPACITOR	100nF 25V K
C509	T2703-KC007A	C CAPACITOR	100nF 25V K	CA02	T0507-00006A	C CAPACITOR	47pF 50V K
C510	T2703-KC007A	C CAPACITOR	100nF 25V K	CA03	T0507-00006A	C CAPACITOR	47pF 50V K
C511	T2703-KC007A	C CAPACITOR	100nF 25V K				
C512	T2703-KC014A	C CAPACITOR	100nF 25V K	L301	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
C513	T2703-KC014A	C CAPACITOR	100nF 25V K	R101	2401-001363	C RESISTOR	330Ω 1/16W J
C514	T2703-KC014A	C CAPACITOR	100nF 25V K	R102	2401-001363	C RESISTOR	330Ω 1/16W J
C515	T2703-KC014A	C CAPACITOR	100nF 25V K	R104	2401-001363	C RESISTOR	330Ω 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R107	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R310	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R108	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R313	2401-001495	C RESISTOR	100Ω 1/16W J
R109	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R314	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R110	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R315	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R114	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R316	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R115	2401-001363	C RESISTOR	330Ω 1/16W J	R317	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R119	2401-001363	C RESISTOR	330Ω 1/16W J	R318	T3711-00035	C RESISTOR	2.7KΩ 1/16W J
R121	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R319	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R123	T2401-CT4710	C RESISTOR	330Ω 1/16W J	R320	2401-001495	C RESISTOR	100Ω 1/16W J
R124	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R321	T3711-00035	C RESISTOR	2.7KΩ 1/16W J
R126	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R322	2401-001495	C RESISTOR	100Ω 1/16W J
R127	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R327	2401-001495	C RESISTOR	100Ω 1/16W J
R128	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R328	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R129	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R329	T2203-FC473D	C RESISTOR	75Ω 1/16W J
R130	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R330	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R131	T3711-00034	C RESISTOR	1.5KΩ 1/16W J	R331	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R132	T1001-00086A	C RESISTOR	47KΩ 1/16W J	R332	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R133	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R333	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R134	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R335	T1001-00084A	C RESISTOR	22KΩ 1/16W J
R136	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R336	T1001-00086A	C RESISTOR	47KΩ 1/16W J
R138	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R337	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R210	2401-002075	C RESISTOR	270Ω 1/16W J	R338	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R211	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R339	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R214	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R340	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R215	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R341	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R216	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R342	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R217	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R343	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R218	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R344	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R219	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R345	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R220	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R346	2401-000914	C RESISTOR	100Ω 1/16W J
R223	T2801-00011A	C RESISTOR	470Ω 1/16W J	R347	2401-000914	C RESISTOR	100Ω 1/16W J
R224	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R348	2401-000914	C RESISTOR	100Ω 1/16W J
R225	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R349	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R226	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R350	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R227	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R351	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R228	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R352	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R229	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R353	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R230	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R354	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R231	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R355	2401-000914	C RESISTOR	100Ω 1/16W J
R232	T2801-00011A	C RESISTOR	470Ω 1/16W J	R356	2401-000914	C RESISTOR	100Ω 1/16W J
R233	T2203-FC221E	C RESISTOR	33Ω 1/16W J	R357	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R235	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R358	2401-000603	C RESISTOR	100Ω 1/16W J
R236	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R359	2401-000603	C RESISTOR	100Ω 1/16W J
R237	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R360	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R238	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R361	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R239	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R363	T2801-00014A	C RESISTOR	680Ω 1/16W J
R242	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R364	T2203-FC102D	C RESISTOR	10Ω 1/16W J
R243	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R365	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R244	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R367	2401-000603	C RESISTOR	100Ω 1/16W J
R245	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R370	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R246	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R371	T2401-CT4710	C RESISTOR	330Ω 1/16W J
R247	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R373	2401-000603	C RESISTOR	100Ω 1/16W J
R248	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R375	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R249	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R376	2401-002075	C RESISTOR	270Ω 1/16W J
R255	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R377	T2203-FC060D	C RESISTOR	0Ω 1/16W J
R256	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R378	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R260	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R380	T1001-00083A	C RESISTOR	10KΩ 1/16W J
R261	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R382	2401-000603	C RESISTOR	100Ω 1/16W J
R262	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R383	T2801-00013A	C RESISTOR	560Ω 1/16W J
R263	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R385	2401-002235	C RESISTOR	100Ω 1/16W J
R264	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R390	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R267	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R391	T2203-FC060D	C RESISTOR	0Ω 1/16W J
R271	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R392	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R272	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R393	2401-002235	C RESISTOR	100Ω 1/16W J
R273	2401-002075	C RESISTOR	270Ω 1/16W J	R394	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R274	T2401-FT0R1A	C RESISTOR	100Ω 1/16W J	R395	T2203-FC330D	C RESISTOR	0Ω 1/16W J
R275	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R396	T3711-00029	C RESISTOR	3.3KΩ 1/16W J
R277	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R397	T3711-00029	C RESISTOR	3.3KΩ 1/16W J
R278	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R411	T2801-00011A	C RESISTOR	470Ω 1/16W J
R279	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R412	T2203-FC334D	C RESISTOR	68Ω 1/16W J
R280	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R413	2401-002235	C RESISTOR	100Ω 1/16W J
R281	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R414	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R282	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R415	T2801-00014A	C RESISTOR	680Ω 1/16W J
R283	T2203-BC106E	C RESISTOR	82Ω 1/16W J	R416	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R285	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R417	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R286	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R418	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R287	T2203-FC470D	C RESISTOR	4.7Ω 1/16W J	R419	T2203-FC100D	C RESISTOR	0Ω 1/16W J
R288	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R427	T1001-00052A	C RESISTOR	1MΩ 1/16W J
R289	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R429	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R290	2401-000269	C RESISTOR	100Ω 1/16W J	R432	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R291	2401-000269	C RESISTOR	100Ω 1/16W J	R434	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R292	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R436	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R294	T2203-FC470D	C RESISTOR	4.7Ω 1/16W J	R442	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R295	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R456	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R296	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R457	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R299	T2203-FC221E	C RESISTOR	33Ω 1/16W J	R458	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R304	2401-000269	C RESISTOR	100Ω 1/16W J	R459	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R305	2401-000269	C RESISTOR	100Ω 1/16W J	R460	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R307	2401-000269	C RESISTOR	100Ω 1/16W J	R461	T1001-00070A	C RESISTOR	470KΩ 1/16W J
R308	2401-001495	C RESISTOR	100Ω 1/16W J	R462	T3711-00038	C RESISTOR	4.7KΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R501	T1001-00083A	C RESISTOR	10KΩ 1/16W J	R712	T1001-00088A	C RESISTOR	100KΩ 1/16W J
R504	T3711-00038	C RESISTOR	4.7KΩ 1/16W J	R713	T1001-00084A	C RESISTOR	22KΩ 1/16W J
R505	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R801	T1001-00083A	C RESISTOR	10KΩ 1/16W J
R509	2007-001167	CHIP BEAD	30Ω	R802	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R510	2007-001167	CHIP BEAD	30Ω	R803	2401-002075	C RESISTOR	270Ω 1/16W J
R511	2007-001167	CHIP BEAD	30Ω	R804	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R515	2007-001167	CHIP BEAD	30Ω	R805	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R516	2007-001167	CHIP BEAD	30Ω	R806	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R517	2007-000115	CHIP BEAD	30Ω	R810	T2203-FC220D	C RESISTOR	0Ω 1/16W J
R518	2007-000115	CHIP BEAD	30Ω	R2215	T2203-FC332D	C RESISTOR	47Ω 1/16W J
R519	2007-000115	CHIP BEAD	30Ω	R2219	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R529	T2203-FC100D	C RESISTOR	0Ω 1/16W J	R2220	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R540	T2203-FC102D	C RESISTOR	10Ω 1/16W J	R2221	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R541	2007-000115	CHIP BEAD	30Ω	R2222	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R542	2007-000115	CHIP BEAD	30Ω	R2223	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R543	2007-000074	CHIP BEAD	30Ω	R2224	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R544	T2203-FC104D	C RESISTOR	22Ω 1/16W J	R2225	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R546	2007-000074	CHIP BEAD	30Ω	R2226	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R548	2007-000074	CHIP BEAD	30Ω	R2227	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R550	2007-000074	CHIP BEAD	30Ω	R2228	T2203-FC150D	C RESISTOR	22Ω 1/16W J
R560	2007-000074	CHIP BEAD	30Ω	R2290	T3711-00033	C RESISTOR	1KΩ 1/16W J
R561	2007-000402	CHIP BEAD	30Ω	R2291	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R562	2007-000402	CHIP BEAD	30Ω	R2292	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R563	2007-000402	CHIP BEAD	30Ω	R2293	T1001-00081A	C RESISTOR	4.7KΩ 1/16W J
R565	2007-000402	CHIP BEAD	30Ω	RA01	T2203-FC220D	C RESISTOR	0Ω 1/16W J
R566	T2203-FC102D	C RESISTOR	10Ω 1/16W J	RA02	T2203-FC330D	C RESISTOR	0Ω 1/16W J
R567	2007-000402	CHIP BEAD	30Ω	RA03	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R568	T2203-FC102D	C RESISTOR	10Ω 1/16W J	RA04	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R571	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA05	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R572	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA06	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R573	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA07	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R574	2401-002235	C RESISTOR	100Ω 1/16W J	RA08	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R575	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA09	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R577	2007-000075	CHIP BEAD	30Ω	RA10	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R579	2007-000075	CHIP BEAD	30Ω	L201	2007-000309	CHIP BEAD	80Ω
R582	2007-000075	CHIP BEAD	30Ω	L202	2007-000309	CHIP BEAD	80Ω
R583	2007-000075	CHIP BEAD	30Ω	L203	2007-000309	CHIP BEAD	80Ω
R584	2007-000075	CHIP BEAD	30Ω	L204	2007-000309	CHIP BEAD	80Ω
R585	2007-000643	CHIP BEAD	30Ω	L205	2007-000309	CHIP BEAD	80Ω
R586	2007-000643	CHIP BEAD	30Ω	L206	2007-000071	CHIP BEAD	80Ω
R587	2007-000643	CHIP BEAD	30Ω	L207	2007-000071	CHIP BEAD	80Ω
R588	2007-000643	CHIP BEAD	30Ω	L208	2007-000071	CHIP BEAD	80Ω
R589	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L209	2007-000071	CHIP BEAD	80Ω
R591	2007-000643	CHIP BEAD	30Ω	L210	2007-000071	CHIP BEAD	80Ω
R592	2007-000076	CHIP BEAD	30Ω	L211	2007-000113	CHIP BEAD	80Ω
R593	T3722-00040A	C RESISTOR	1KΩ 1/16W J	L214	2007-000113	CHIP BEAD	80Ω
R594	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L215	2007-000113	CHIP BEAD	80Ω
R595	T3711-00038	C RESISTOR	4.7KΩ 1/16W J	L216	2007-000113	CHIP BEAD	80Ω
R596	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L217	2007-000113	CHIP BEAD	80Ω
R597	T2401-BT102A	C RESISTOR	390Ω 1/16W J	L218	2007-000072	CHIP BEAD	80Ω
R601	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L219	2007-000072	CHIP BEAD	80Ω
R602	T1001-00063A	C RESISTOR	68KΩ 1/16W J	L220	2007-000072	CHIP BEAD	80Ω
R603	2401-000242	C RESISTOR	150Ω 1/16W J	L221	2007-000072	CHIP BEAD	80Ω
R604	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L302	2007-000072	CHIP BEAD	80Ω
R605	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L303	2007-001134	CHIP BEAD	80Ω
R606	T1001-00086A	C RESISTOR	47KΩ 1/16W J	L304	2007-001134	CHIP BEAD	80Ω
R607	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L305	2007-001134	CHIP BEAD	80Ω
R608	T1001-00075A	C RESISTOR	30KΩ 1/16W J	L306	2007-000093	CHIP BEAD	500Ω
R609	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L317	T2007-HC330J	CHIP COIL	10uH
R610	T1001-00075A	C RESISTOR	30KΩ 1/16W J	L401	2007-000093	CHIP BEAD	500Ω
R611	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L402	2007-000093	CHIP BEAD	500Ω
R612	T1001-00086A	C RESISTOR	47KΩ 1/16W J	L404	2007-000093	CHIP BEAD	500Ω
R613	2401-002235	C RESISTOR	100Ω 1/16W J	L405	2007-000093	CHIP BEAD	500Ω
R614	2401-002594	C RESISTOR	100Ω 1/16W J	L406	2007-000094	CHIP BEAD	500Ω
R615	2401-002594	C RESISTOR	100Ω 1/16W J	L408	2007-000094	CHIP BEAD	500Ω
R616	2401-002594	C RESISTOR	100Ω 1/16W J	L501	2007-000094	CHIP BEAD	500Ω
R617	2401-002594	C RESISTOR	100Ω 1/16W J	L502	2007-000094	CHIP BEAD	500Ω
R618	2401-002594	C RESISTOR	100Ω 1/16W J	L504	2007-000094	CHIP BEAD	500Ω
R619	T2203-FC100D	C RESISTOR	0Ω 1/16W J	L505	2007-000129	CHIP BEAD	500Ω
R620	T2203-FC100D	C RESISTOR	0Ω 1/16W J	L507	2007-000129	CHIP BEAD	500Ω
R621	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L509	2007-000129	CHIP BEAD	500Ω
R622	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L510	2007-000129	CHIP BEAD	500Ω
R623	T1001-00083A	C RESISTOR	10KΩ 1/16W J	L511	2007-000129	CHIP BEAD	500Ω
R624	T1001-00082A	C RESISTOR	20KΩ 1/16W J	L512	2007-000096	CHIP BEAD	500Ω
R625	T3711-00033	C RESISTOR	1KΩ 1/16W J	L513	2007-000096	CHIP BEAD	500Ω
R629	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L514	2007-000096	CHIP BEAD	500Ω
R630	T1001-00082A	C RESISTOR	20KΩ 1/16W J	L515	2007-000096	CHIP BEAD	500Ω
R631	T1001-00083A	C RESISTOR	10KΩ 1/16W J	L516	2007-000096	CHIP BEAD	500Ω
R632	T2203-FC102D	C RESISTOR	10Ω 1/16W J	L517	2007-000097	CHIP BEAD	500Ω
R633	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L5VA	2007-000120	CHIP BEAD	80Ω
R701	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L5VB	2007-000120	CHIP BEAD	80Ω
R702	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L5VC	2007-000121	CHIP BEAD	80Ω
R703	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L601	T2007-HC472J	CHIP COIL	10uH
R704	T2801-00013A	C RESISTOR	560Ω 1/16W J	L602	T2007-HC472J	CHIP COIL	10uH
R705	T2801-00012A	C RESISTOR	820Ω 1/16W J	L603	2007-000097	CHIP BEAD	500Ω
R707	T2203-FC103D	C RESISTOR	10Ω 1/16W J	L606	2007-000097	CHIP BEAD	500Ω
R708	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L608	2007-000097	CHIP BEAD	500Ω
R709	T2203-FC103D	C RESISTOR	10Ω 1/16W J	L610	2007-000121	CHIP BEAD	80Ω
R710	T3711-00033	C RESISTOR	1KΩ 1/16W J	L701	2007-000109	CHIP COIL	10uH
R711	T2203-FC330D	C RESISTOR	0Ω 1/16W J				

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
L703	2007-000102	SMD COIL	680uH	CE626	T2203-FC100D	E CAPACITOR	1uF 50V M
L705	2007-000100	SMD COIL	470uH	CE627	2007-000102	E CAPACITOR	47uF 16V M
L801	2007-000118	CHIP BEAD	80Ω	CE630	T2007-HC472J	E CAPACITOR	22uF 16V M
L802	2007-000118	CHIP BEAD	80Ω	CE701	2007-000100	E CAPACITOR	100uF 16V M
L803	2007-000118	CHIP BEAD	80Ω	CE702	T2203-FC102D	E CAPACITOR	10uF 16V M
L804	2007-000118	CHIP BEAD	80Ω	CE703	2007-000100	E CAPACITOR	100uF 16V M
L805	2007-000118	CHIP BEAD	80Ω	CE704	2007-000100	E CAPACITOR	100uF 16V M
L806	2007-000077	CHIP BEAD	80Ω	CE705	T2203-FC100D	E CAPACITOR	1uF 50V M
L807	2007-000077	CHIP BEAD	80Ω	CE801	T2203-FC103D	E CAPACITOR	220uF 16V M
L808	2007-000077	CHIP BEAD	80Ω	CE802	T2203-FC221E	E CAPACITOR	470uF 16V M
L809	2007-000077	CHIP BEAD	80Ω	CE803	2007-000107	E CAPACITOR	47uF 16V M
L810	2007-000077	CHIP BEAD	80Ω	CE804	2007-000100	E CAPACITOR	100uF 16V M
L812	2007-000119	CHIP BEAD	80Ω	CE805	T2203-DC104E	E CAPACITOR	220uF 16V M
L813	2007-000119	CHIP BEAD	80Ω	CE808	T2203-FC104D	E CAPACITOR	220uF 16V M
L814	2007-000107	SMD COIL	100uH	CE809	T2203-FC224D	E CAPACITOR	1000uF 10V M
L815	2007-000119	CHIP BEAD	80Ω	CE810	T2203-FC222D	E CAPACITOR	470uF 16V M
L816	2007-000119	CHIP BEAD	80Ω	CE811	T2203-DC104E	E CAPACITOR	220uF 16V M
L820	2007-000119	CHIP BEAD	80Ω	J101	2401-002594	CONNECTOR	
L821	2007-000120	CHIP BEAD	80Ω	J102	T2401-CT221O	CONNECTOR	
L822	2007-000120	CHIP BEAD	80Ω	J201	T2203-FC472D	JACK	PC IN
L823	2007-000120	CHIP BEAD	80Ω	J202	T2203-FC473D	JACK	EXT2
L830	T3711-00033	C RESISTOR	1KΩ 1/16W J	J203	T2203-FC682D	JACK	EXT-1
LA01	2007-000121	CHIP BEAD	80Ω	J205	T2203-FC104E	JACK	EXT-3/EXT4
LA02	2007-000121	CHIP BEAD	80Ω	J209	T2401-FT0R1A	CONNECTOR	
				J210	2401-000269	CONNECTOR	
CE101	2007-000097	E CAPACITOR	100uF 16V M	J303	T2203-BC106E	CONNECTOR	
CE102	2007-000107	E CAPACITOR	47uF 16V M	J304	2401-001495	CONNECTOR	
CE103	2007-000109	E CAPACITOR	22uF 16V M	J501	2401-000603	CONNECTOR	
CE105	T2203-FC220D	E CAPACITOR	10uF 16V M	J601	T2401-CT470O	CONNECTOR	
CE107	T2203-FC060D	E CAPACITOR	1uF 50V M	J602	2401-000914	CONNECTOR	
CE108	2007-000096	E CAPACITOR	0.1uF 50V M	J801	2401-002235	CONNECTOR	
CE202	T2203-FC220D	E CAPACITOR	10uF 16V M	RN301	2007-000084	BEAD ARRAY	120Ω
CE203	T2203-FC220D	E CAPACITOR	10uF 16V M	RN302	2007-000084	BEAD ARRAY	120Ω
CE204	T2203-FC220D	E CAPACITOR	10uF 16V M	RN303	2007-000084	BEAD ARRAY	120Ω
CE205	T2203-FC220D	E CAPACITOR	10uF 16V M	RN304	2007-000084	BEAD ARRAY	120Ω
CE206	T2203-FC103D	E CAPACITOR	220uF 16V M	RN305	2007-000084	BEAD ARRAY	120Ω
CE207	T2203-FC103D	E CAPACITOR	220uF 16V M	RN306	2007-000090	BEAD ARRAY	120Ω
CE220	2007-000097	E CAPACITOR	100uF 16V M	RN307	2007-000090	BEAD ARRAY	120Ω
CE221	2007-000097	E CAPACITOR	100uF 16V M	RN308	T1001-00079A	CHIP ARRAY	4.7KΩ 1/16W J
CE301	T2203-FC150D	E CAPACITOR	100uF 10V M	RN309	2007-000090	BEAD ARRAY	120Ω
CE302	T2203-CC105D	E CAPACITOR	100uF 10V M	RN310	T1001-00079A	CHIP ARRAY	4.7KΩ 1/16W J
CE402	2007-000109	E CAPACITOR	22uF 16V M	RN408	2007-000078	BEAD ARRAY	30Ω
CE404	T2203-FC330D	E CAPACITOR	10uF 16V M	RN409	2007-000078	BEAD ARRAY	30Ω
CE405	T2203-FC330D	E CAPACITOR	10uF 16V M	RN410	2007-000078	BEAD ARRAY	30Ω
CE407	T2203-FC330D	E CAPACITOR	10uF 16V M	RN411	2007-000078	BEAD ARRAY	30Ω
CE408	T2203-FC330D	E CAPACITOR	10uF 16V M	RN412	T1001-00049A	CHIP ARRAY	33Ω 1/16W J
CE410	T2203-FC221E	E CAPACITOR	470uF 16V M	RN413	T1001-00049A	CHIP ARRAY	33Ω 1/16W J
CE411	T2203-FC152D	E CAPACITOR	4.7uF 50V M	RN414	T1001-00049A	CHIP ARRAY	33Ω 1/16W J
CE412	T2203-FC330D	E CAPACITOR	10uF 16V M	RN415	T1001-00049A	CHIP ARRAY	33Ω 1/16W J
CE413	T2203-FC470D	E CAPACITOR	10uF 16V M	RN416	T1001-00049A	CHIP ARRAY	33Ω 1/16W J
CE414	T2203-FC152D	E CAPACITOR	4.7uF 50V M	RN417	T1001-00078A	CHIP ARRAY	33Ω 1/16W J
CE415	T2203-FC470D	E CAPACITOR	10uF 16V M	RN418	T1001-00078A	CHIP ARRAY	33Ω 1/16W J
CE416	T2203-FC152D	E CAPACITOR	4.7uF 50V M	RN503	2007-000081	BEAD ARRAY	30Ω
CE502	T2203-FC104D	E CAPACITOR	220uF 16V M	RN505	2007-000081	BEAD ARRAY	30Ω
CE503	2007-000097	E CAPACITOR	100uF 16V M	RN508	2007-000081	BEAD ARRAY	30Ω
CE504	2007-000107	E CAPACITOR	47uF 16V M	RN509	2007-000081	BEAD ARRAY	30Ω
CE506	2007-000109	E CAPACITOR	22uF 16V M	RN510	2007-000082	BEAD ARRAY	30Ω
CE507	2007-000109	E CAPACITOR	22uF 16V M	RN511	2007-000082	BEAD ARRAY	30Ω
CE508	2007-000102	E CAPACITOR	47uF 16V M	RN512	2007-000082	BEAD ARRAY	30Ω
CE509	2007-000109	E CAPACITOR	22uF 16V M	RN513	2007-000078	BEAD ARRAY	30Ω
CE510	T2007-HC330J	E CAPACITOR	22uF 16V M	RN514	2007-000082	BEAD ARRAY	30Ω
CE511	T2007-HC330J	E CAPACITOR	22uF 16V M	RN515	2007-000123	BEAD ARRAY	30Ω
CE512	T2007-HC330J	E CAPACITOR	22uF 16V M	RN516	2007-000123	BEAD ARRAY	30Ω
CE513	T2007-HC330J	E CAPACITOR	22uF 16V M	RN517	2007-000123	BEAD ARRAY	30Ω
CE514	T2007-HC330J	E CAPACITOR	22uF 16V M	RN518	2007-000123	BEAD ARRAY	30Ω
CE515	T2007-HC472J	E CAPACITOR	22uF 16V M	RN519	2007-000123	BEAD ARRAY	30Ω
CE516	T2007-HC472J	E CAPACITOR	22uF 16V M	RN520	2007-000081	BEAD ARRAY	30Ω
CE517	T2203-FC470D	E CAPACITOR	10uF 16V M	X301	T2203-FC331D	CRYSTAL	6MHz
CE518	2007-000097	E CAPACITOR	100uF 16V M	X401	T2203-FC392D	CRYSTAL	27MHz
CE601	T2203-FC103D	E CAPACITOR	220uF 16V M	X501	T2203-FC332D	CRYSTAL	14.318MHz
CE602	T2203-FC103D	E CAPACITOR	220uF 16V M	X601	T2203-FC334D	CRYSTAL	18.432MHz
CE603	2007-000102	E CAPACITOR	47uF 16V M				
CE604	2007-000102	E CAPACITOR	47uF 16V M				
CE605	T2203-FC060D	E CAPACITOR	1uF 50V M				
CE606	T2203-CC105D	E CAPACITOR	100uF 10V M				
CE607	T2203-FC470D	E CAPACITOR	10uF 16V M				
CE608	T2203-FC470D	E CAPACITOR	10uF 16V M				
CE609	T2203-FC101D	E CAPACITOR	10uF 16V M				
CE610	T2203-FC101D	E CAPACITOR	10uF 16V M				
CE611	T2203-FC101D	E CAPACITOR	10uF 16V M				
CE612	2007-000102	E CAPACITOR	47uF 16V M				
CE613	T2203-FC101D	E CAPACITOR	10uF 16V M				
CE614	T2203-FC101D	E CAPACITOR	10uF 16V M				
CE617	T2203-FC102D	E CAPACITOR	10uF 16V M				
CE620	T2203-FC102D	E CAPACITOR	10uF 16V M				
CE621	T2203-FC102D	E CAPACITOR	10uF 16V M				
CE622	T2203-FC060D	E CAPACITOR	1uF 50V M				
CE623	T2203-FC060D	E CAPACITOR	1uF 50V M				
CE624	T2203-FC102D	E CAPACITOR	10uF 16V M				
CE625	T2203-FC060D	E CAPACITOR	1uF 50V M				

## POWER P.W. BOARD ASS'Y (QAL0826-001)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

## LED P.W. BOARD ASS'Y (QAL0827-001)

REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.

## KEY P.W. BOARD ASS'Y (QAL0828-001)

REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.



# PRINTED WIRING BOARD PARTS LIST [LT-32A61BU/c, LT-32A61SJ, LT-32A61SU]

## MAIN P.W. BOARD ASS'Y (QAL0824-001)

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
U101	T1001-00081A	IC			ZD213	T2901-HC002A	Z DIODE		
U202	ATF02-32A61SJ	IC	(SERVICE)		ZD214	T2901-HC011A	Z DIODE		
U301	T1001-00073A-61	IC			ZD215	T2901-HC011A	Z DIODE		
U302	T1001-00064A	IC			ZD216	T2901-HC011A	Z DIODE		
U303	ATF32-32A61SJ	IC	(SERVICE)		ZD217	T2901-HC011A	Z DIODE		
U401	T1001-00084A	IC			ZD218	T2901-HC011A	Z DIODE		
U402	T1001-00085A	IC			ZD219	T2901-JC005A	Z DIODE		
U405	T1001-00075A	IC			ZD221	T2901-JC005A	Z DIODE		
U501	T1001-00086A	IC			ZD222	T2901-JC005A	Z DIODE		
U502	T1001-00063A	IC			ZD227	T2901-JC005A	Z DIODE		
U601	T1001-00087A	IC			ZD230	T2901-JC005A	Z DIODE		
U602	T1001-00088A	IC			ZD231	T2901-JC012B	Z DIODE		
U603	T1001-00070A	IC			ZD232	T2901-JC012B	Z DIODE		
U801	T0407-00004A	TRANSISTOR			ZD250	T2901-JC012B	Z DIODE		
U802	T0407-00004A	TRANSISTOR			ZD251	T2901-JC012B	Z DIODE		
Q101	T1001-00052A	IC			ZD252	T2901-JC012B	Z DIODE		
Q102	T0507-00001A	TRANSISTOR			ZD253	T2901-JC010B	Z DIODE		
Q103	T0507-00001A	TRANSISTOR			ZD254	T2901-JC010B	Z DIODE		
Q104	T0507-00001A	TRANSISTOR			ZD255	T2901-JC010B	Z DIODE		
Q105	T0507-00006A	TRANSISTOR			ZD256	T2901-JC010B	Z DIODE		
Q106	T0507-00001A	TRANSISTOR			ZD257	T2901-JC010B	Z DIODE		
Q202	T0507-00001A	TRANSISTOR			ZD258	T2901-JC004A	Z DIODE		
Q203	T0507-00005A	TRANSISTOR			ZD259	T2901-JC004A	Z DIODE		
Q301	T1001-00049A	IC			ZD260	T2901-JC004A	Z DIODE		
Q303	T1001-00078A	IC			ZD261	T2901-JC004A	Z DIODE		
Q304	T0507-00003A	TRANSISTOR			ZD262	T2901-JC004A	Z DIODE		
Q305	T0507-00003A	TRANSISTOR			ZD263	T2703-KC007A	Z DIODE		
Q306	T0507-00007A	TRANSISTOR			ZD264	T2703-KC007A	Z DIODE		
Q307	T0407-00003A	TRANSISTOR			ZD267	T2703-KC007A	Z DIODE		
Q308	T0507-00005A	TRANSISTOR			ZD270	T2703-KC007A	Z DIODE		
Q309	T0507-00005A	TRANSISTOR			ZD271	T2703-KC007A	Z DIODE		
Q311	T0507-00005A	TRANSISTOR			ZD280	T2703-KC014A	Z DIODE		
Q312	T0507-00006A	TRANSISTOR			ZD281	T2703-KC014A	Z DIODE		
Q315	T0507-00006A	TRANSISTOR			ZD702	T2703-JC011A	DIODE		
Q316	T0507-00005A	TRANSISTOR			ZD2213	T2703-KC014A	Z DIODE		
Q317	T0407-00003A	TRANSISTOR			ZD2214	T2703-KC014A	Z DIODE		
Q403	T0507-00006A	TRANSISTOR			ZD2215	T2703-KC014A	Z DIODE		
Q501	T1001-00079A	IC			ZD2216	T2703-LC010A	Z DIODE		
Q502	T1001-00048A	IC			ZD2274	T2703-LC010A	Z DIODE		
Q503	T0507-00007A	TRANSISTOR			C101	T0407-00002A	C CAPACITOR	100nF 25V K	
Q601	T0507-00006A	TRANSISTOR			C103	2007-000094	C CAPACITOR	10uF 10V Z	
Q602	T0507-00002A	TRANSISTOR			C105	2007-000093	C CAPACITOR	100nF 50V Z	
Q603	T0507-00002A	TRANSISTOR			C106	2007-000094	C CAPACITOR	10uF 10V Z	
Q604	T0407-00002A	TRANSISTOR			C107	2007-000094	C CAPACITOR	10uF 10V Z	
Q701	T0507-00002A	TRANSISTOR			C109	2007-000094	C CAPACITOR	10uF 10V Z	
Q702	T0507-00002A	TRANSISTOR			C110	2007-000094	C CAPACITOR	10uF 10V Z	
Q703	T0507-00002A	TRANSISTOR			C113	2007-000129	C CAPACITOR	10uF 10V Z	
Q801	T1001-00089A	IC			C201	T0507-00005A	C CAPACITOR	1nF 50V K	
Q802	T0507-00008A	TRANSISTOR			C202	2007-000081	C CAPACITOR	47nF 50V K	
Q804	T1001-00051A	IC			C203	2007-000081	C CAPACITOR	47nF 50V K	
Q805	T0507-00008A	TRANSISTOR			C204	2007-000081	C CAPACITOR	47nF 50V K	
Q806	T0507-00008A	TRANSISTOR			C205	2007-000081	C CAPACITOR	47nF 50V K	
Q2203	T0407-00002A	TRANSISTOR			C206	2007-000081	C CAPACITOR	47nF 50V K	
D101	T0408-00002A	DIODE			C207	2007-000082	C CAPACITOR	47nF 50V K	
D205	T2703-IC002A	Z DIODE			C208	2007-000082	C CAPACITOR	47nF 50V K	
D206	T2703-IC002A	Z DIODE			C209	2007-000082	C CAPACITOR	47nF 50V K	
D207	T2703-IC002A	Z DIODE			C210	T0507-00005A	C CAPACITOR	1nF 50V K	
D208	T2703-IC002A	Z DIODE			C211	2007-000082	C CAPACITOR	47nF 50V K	
D209	T2703-IC002A	Z DIODE			C213	T1001-00089A	C CAPACITOR	10pF 50V K	
D210	T2703-IC002A	Z DIODE			C214	T1001-00089A	C CAPACITOR	10pF 50V K	
D222	2007-000070	DIODE			C215	T1001-00089A	C CAPACITOR	10pF 50V K	
D223	2007-000070	DIODE			C216	2007-000120	C CAPACITOR	0.47nF 50V K	
D224	2007-000070	DIODE			C218	2007-000120	C CAPACITOR	0.47nF 50V K	
D225	2007-000070	DIODE			C219	2007-000120	C CAPACITOR	0.47nF 50V K	
D226	2007-000070	DIODE			C220	2007-000120	C CAPACITOR	0.47nF 50V K	
D227	2007-000882	DIODE			C221	2007-000120	C CAPACITOR	0.47nF 50V K	
D228	2007-000882	DIODE			C222	2007-000121	C CAPACITOR	0.47nF 50V K	
D229	2007-000882	DIODE			C223	2007-000121	C CAPACITOR	0.47nF 50V K	
D301	T0408-00002A	DIODE			C226	2007-000121	C CAPACITOR	0.47nF 50V K	
D601	T0408-00002A	DIODE			C227	2007-000082	C CAPACITOR	47nF 50V K	
D602	T0408-00002A	DIODE			C228	2007-000084	C CAPACITOR	47nF 50V K	
D702	T0408-00002A	DIODE			C229	2007-000084	C CAPACITOR	47nF 50V K	
D704	T0408-00002A	DIODE			C230	2007-000121	C CAPACITOR	0.47nF 50V K	
D801	T0407-00005A	DIODE			C233	2007-000121	C CAPACITOR	0.47nF 50V K	
ZD101	T0408-000009A	Z DIODE			C234	2007-000078	C CAPACITOR	0.47nF 50V K	
ZD202	T0408-000009A	Z DIODE			C235	2007-000078	C CAPACITOR	0.47nF 50V K	
ZD203	T0408-000009A	Z DIODE			C236	T1001-00089A	C CAPACITOR	10pF 50V K	
ZD204	T0408-000009A	Z DIODE			C238	T1001-00089A	C CAPACITOR	10pF 50V K	
ZD206	T0408-000009A	Z DIODE			C242	2007-000643	C CAPACITOR	0.33nF 50V K	
ZD209	T2901-HC002A	Z DIODE			C243	2007-000643	C CAPACITOR	0.33nF 50V K	
ZD210	T2901-HC002A	Z DIODE			C244	2007-000643	C CAPACITOR	0.33nF 50V K	
ZD211	T2901-HC002A	Z DIODE			C248	2007-000077	C CAPACITOR	330nF 16V Z	
ZD212	T2901-HC002A	Z DIODE			C249	2007-000077	C CAPACITOR	330nF 16V Z	
					C252	T0407-00002A	C CAPACITOR	100nF 25V K	
					C253	T0407-00002A	C CAPACITOR	100nF 25V K	
					C254	T0407-00002A	C CAPACITOR	100nF 25V K	

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C255	T0407-00002A	C CAPACITOR	100nF 25V K	C516	T2703-KC014A	C CAPACITOR	100nF 25V K
C256	T0407-00004A	C CAPACITOR	100nF 25V K	C517	T2703-LC010A	C CAPACITOR	100nF 25V K
C257	T0407-00004A	C CAPACITOR	100nF 25V K	C518	T2703-LC010A	C CAPACITOR	100nF 25V K
C258	T0407-00004A	C CAPACITOR	100nF 25V K	C519	T2703-LC010A	C CAPACITOR	100nF 25V K
C259	T0407-00004A	C CAPACITOR	100nF 25V K	C520	T2703-LC010A	C CAPACITOR	100nF 25V K
C301	T0407-00004A	C CAPACITOR	100nF 25V K	C524	T2703-LC010A	C CAPACITOR	100nF 25V K
C302	T0407-00003A	C CAPACITOR	100nF 25V K	C525	T2703-IC002A	C CAPACITOR	100nF 25V K
C303	T0407-00003A	C CAPACITOR	100nF 25V K	C526	T2703-IC002A	C CAPACITOR	100nF 25V K
C304	T0407-00003A	C CAPACITOR	100nF 25V K	C527	T2703-IC002A	C CAPACITOR	100nF 25V K
C305	T0407-00003A	C CAPACITOR	100nF 25V K	C528	T2703-IC002A	C CAPACITOR	100nF 25V K
C306	2007-000074	C CAPACITOR	0.22nF 50V K	C529	T2703-IC002A	C CAPACITOR	100nF 25V K
C307	T0507-00002A	C CAPACITOR	10nF 50V K	C530	T2703-IC002A	C CAPACITOR	100nF 25V K
C308	2007-000075	C CAPACITOR	220nF 50V K	C531	T2703-IC002A	C CAPACITOR	100nF 25V K
C309	T0407-00003A	C CAPACITOR	100nF 25V K	C532	T2703-IC002A	C CAPACITOR	100nF 25V K
C310	T0408-00002A	C CAPACITOR	100nF 25V K	C533	T2703-IC002A	C CAPACITOR	100nF 25V K
C311	T0507-00007A	C CAPACITOR	33pF 50V K	C534	T2703-IC002A	C CAPACITOR	100nF 25V K
C312	T0507-00001A	C CAPACITOR	0.1nF 50V K	C535	T2703-JC011A	C CAPACITOR	100nF 25V K
C313	T0507-00001A	C CAPACITOR	0.1nF 50V K	C536	T2703-JC011A	C CAPACITOR	100nF 25V K
C314	T0507-00001A	C CAPACITOR	0.1nF 50V K	C537	T2703-JC011A	C CAPACITOR	100nF 25V K
C316	T0507-00007A	C CAPACITOR	33pF 50V K	C538	T2703-JC011A	C CAPACITOR	100nF 25V K
C317	T0408-00002A	C CAPACITOR	100nF 25V K	C539	T2703-JC011A	C CAPACITOR	100nF 25V K
C318	T0408-00002A	C CAPACITOR	100nF 25V K	C540	2007-000070	C CAPACITOR	100nF 25V K
C319	T0408-00002A	C CAPACITOR	100nF 25V K	C541	2007-000070	C CAPACITOR	100nF 25V K
C402	T0408-00002A	C CAPACITOR	100nF 25V K	C543	2007-000070	C CAPACITOR	100nF 25V K
C403	T0408-00002A	C CAPACITOR	100nF 25V K	C544	2007-000070	C CAPACITOR	100nF 25V K
C404	T0408-00002A	C CAPACITOR	100nF 25V K	C545	2007-000070	C CAPACITOR	100nF 25V K
C405	T0408-00002A	C CAPACITOR	100nF 25V K	C546	2007-000882	C CAPACITOR	100nF 25V K
C406	T0408-00002A	C CAPACITOR	100nF 25V K	C548	2007-000882	C CAPACITOR	100nF 25V K
C407	T0408-00002A	C CAPACITOR	100nF 25V K	C549	2007-000882	C CAPACITOR	100nF 25V K
C409	T0407-00005A	C CAPACITOR	100nF 25V K	C550	T1001-00051A	C CAPACITOR	10pF 50V K
C411	T0407-00005A	C CAPACITOR	100nF 25V K	C552	2007-000882	C CAPACITOR	100nF 25V K
C412	T0407-00005A	C CAPACITOR	100nF 25V K	C553	T0507-00007A	C CAPACITOR	33pF 50V K
C413	T0407-00005A	C CAPACITOR	100nF 25V K	C554	T0507-00007A	C CAPACITOR	33pF 50V K
C414	T0407-00005A	C CAPACITOR	100nF 25V K	C555	2007-000882	C CAPACITOR	100nF 25V K
C415	T0408-000009A	C CAPACITOR	100nF 25V K	C556	T0507-00005A	C CAPACITOR	1nF 50V K
C416	T0408-000009A	C CAPACITOR	100nF 25V K	C557	T1001-00051A	C CAPACITOR	10pF 50V K
C417	T0408-000009A	C CAPACITOR	100nF 25V K	C559	2007-001134	C CAPACITOR	1uF 16V Z
C419	T0408-000009A	C CAPACITOR	100nF 25V K	C601	2007-000309	C CAPACITOR	100nF 25V K
C420	T0408-000009A	C CAPACITOR	100nF 25V K	C604	2007-000118	C CAPACITOR	3.3nF 50V K
C421	2007-000115	C CAPACITOR	1.5nF 50V K	C605	2007-000118	C CAPACITOR	3.3nF 50V K
C422	2007-000115	C CAPACITOR	1.5nF 50V K	C606	T1001-00048A	C CAPACITOR	6pF 50V K
C423	2007-000115	C CAPACITOR	1.5nF 50V K	C607	T1001-00048A	C CAPACITOR	6pF 50V K
C424	T0507-00001A	C CAPACITOR	0.1nF 50V K	C608	T0507-00006A	C CAPACITOR	47pF 50V K
C425	T0507-00003A	C CAPACITOR	22pF 50V K	C610	2007-000309	C CAPACITOR	100nF 25V K
C426	T0507-00003A	C CAPACITOR	22pF 50V K	C611	T0507-00006A	C CAPACITOR	47pF 50V K
C427	T2901-HC002A	C CAPACITOR	100nF 25V K	C612	T2203-FC100D	C RESISTOR	0Ω 1/16W J
C428	T2901-HC002A	C CAPACITOR	100nF 25V K	C614	2007-000123	C CAPACITOR	4.7nF 50V K
C429	T2901-HC002A	C CAPACITOR	100nF 25V K	C615	2007-000643	C CAPACITOR	0.33nF 50V K
C430	T2901-HC002A	C CAPACITOR	100nF 25V K	C616	2007-000643	C CAPACITOR	0.33nF 50V K
C431	T2901-HC002A	C CAPACITOR	100nF 25V K	C617	2007-000309	C CAPACITOR	100nF 25V K
C432	T2901-HC011A	C CAPACITOR	100nF 25V K	C618	T0507-00002A	C CAPACITOR	10nF 50V K
C433	T2901-HC011A	C CAPACITOR	100nF 25V K	C619	T0507-00002A	C CAPACITOR	10nF 50V K
C434	T2901-HC011A	C CAPACITOR	100nF 25V K	C620	T0507-00002A	C CAPACITOR	10nF 50V K
C435	T2901-HC011A	C CAPACITOR	100nF 25V K	C621	2007-000309	C CAPACITOR	100nF 25V K
C436	T1001-00051A	C CAPACITOR	10pF 50V K	C623	2007-000119	C CAPACITOR	3.9nF 50V K
C438	T2901-HC011A	C CAPACITOR	100nF 25V K	C624	2007-000119	C CAPACITOR	3.9nF 50V K
C439	T2901-JC005A	C CAPACITOR	100nF 25V K	C625	T0507-00005A	C CAPACITOR	1nF 50V K
C440	T2901-JC005A	C CAPACITOR	100nF 25V K	C626	2007-000076	C CAPACITOR	0.33nF 50V K
C441	T2901-JC005A	C CAPACITOR	100nF 25V K	C627	2007-000076	C CAPACITOR	0.33nF 50V K
C442	T2901-JC005A	C CAPACITOR	100nF 25V K	C632	2007-000076	C CAPACITOR	0.33nF 50V K
C443	T2901-JC005A	C CAPACITOR	100nF 25V K	C633	2007-000076	C CAPACITOR	0.33nF 50V K
C444	T2901-JC012B	C CAPACITOR	100nF 25V K	C634	2007-001134	C CAPACITOR	1uF 16V Z
C445	T2901-JC012B	C CAPACITOR	100nF 25V K	C635	2007-001134	C CAPACITOR	1uF 16V Z
C446	T2901-JC012B	C CAPACITOR	100nF 25V K	C636	T0507-00006A	C CAPACITOR	47pF 50V K
C447	T2901-JC012B	C CAPACITOR	100nF 25V K	C638	2007-000309	C CAPACITOR	100nF 25V K
C451	T0507-00002A	C CAPACITOR	10nF 50V K	C639	2007-000090	C CAPACITOR	6.8nF 50V K
C452	T2901-JC012B	C CAPACITOR	100nF 25V K	C640	2007-000090	C CAPACITOR	6.8nF 50V K
C453	T2901-JC010B	C CAPACITOR	100nF 25V K	C701	2007-000071	C CAPACITOR	100nF 25V K
C454	T2901-JC010B	C CAPACITOR	100nF 25V K	C702	2007-000071	C CAPACITOR	100nF 25V K
C455	2007-000078	C CAPACITOR	0.47nF 50V K	C703	T0507-00008A	C CAPACITOR	10nF 50V K
C456	T2901-JC010B	C CAPACITOR	100nF 25V K	C707	2007-000072	C CAPACITOR	100nF 50V K
C457	T2901-JC010B	C CAPACITOR	100nF 25V K	C710	2007-000084	C CAPACITOR	47nF 50V K
C458	T2901-JC010B	C CAPACITOR	100nF 25V K	C712	2007-001167	C CAPACITOR	0.15nF 50V K
C459	2007-001167	C CAPACITOR	0.15nF 50V K	C714	2007-000402	C CAPACITOR	2.2nF 50V K
C460	2007-001167	C CAPACITOR	0.15nF 50V K	C715	T0507-00005A	C CAPACITOR	1nF 50V K
C461	2007-000115	C CAPACITOR	1.5nF 50V K	C801	2007-000071	C CAPACITOR	100nF 25V K
C501	T2901-JC004A	C CAPACITOR	100nF 25V K	C802	2007-000071	C CAPACITOR	100nF 25V K
C502	T2901-JC004A	C CAPACITOR	100nF 25V K	C805	2007-000071	C CAPACITOR	100nF 25V K
C503	T2901-JC004A	C CAPACITOR	100nF 25V K	C806	2007-000113	C CAPACITOR	100nF 25V K
C504	T2901-JC004A	C CAPACITOR	100nF 25V K	C807	2007-000113	C CAPACITOR	100nF 25V K
C506	T2901-JC004A	C CAPACITOR	100nF 25V K	C820	2007-000113	C CAPACITOR	100nF 25V K
C507	T2703-KC007A	C CAPACITOR	100nF 25V K	C821	2007-000113	C CAPACITOR	100nF 25V K
C508	T2703-KC007A	C CAPACITOR	100nF 25V K	C2251	2007-000113	C CAPACITOR	100nF 25V K
C509	T2703-KC007A	C CAPACITOR	100nF 25V K	CA02	T0507-00006A	C CAPACITOR	47pF 50V K
C510	T2703-KC007A	C CAPACITOR	100nF 25V K	CA03	T0507-00006A	C CAPACITOR	47pF 50V K
C511	T2703-KC007A	C CAPACITOR	100nF 25V K				
C512	T2703-KC014A	C CAPACITOR	100nF 25V K	L301	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
C513	T2703-KC014A	C CAPACITOR	100nF 25V K	R101	2401-001363	C RESISTOR	330Ω 1/16W J
C514	T2703-KC014A	C CAPACITOR	100nF 25V K	R102	2401-001363	C RESISTOR	330Ω 1/16W J
C515	T2703-KC014A	C CAPACITOR	100nF 25V K	R104	2401-001363	C RESISTOR	330Ω 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R107	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R310	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R108	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R313	2401-001495	C RESISTOR	100Ω 1/16W J
R109	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R314	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R110	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R315	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R114	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R316	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R115	2401-001363	C RESISTOR	330Ω 1/16W J	R317	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R119	2401-001363	C RESISTOR	330Ω 1/16W J	R318	T3711-00035	C RESISTOR	2.7KΩ 1/16W J
R121	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R319	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R123	T2401-CT4710	C RESISTOR	330Ω 1/16W J	R320	2401-001495	C RESISTOR	100Ω 1/16W J
R124	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R321	T3711-00035	C RESISTOR	2.7KΩ 1/16W J
R126	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R322	2401-001495	C RESISTOR	100Ω 1/16W J
R127	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R327	2401-001495	C RESISTOR	100Ω 1/16W J
R128	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R328	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R129	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R329	T2203-FC473D	C RESISTOR	75Ω 1/16W J
R130	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R330	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R131	T3711-00034	C RESISTOR	1.5KΩ 1/16W J	R331	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R132	T1001-00086A	C RESISTOR	47KΩ 1/16W J	R332	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R133	T2401-BT1010	C RESISTOR	220Ω 1/16W J	R333	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R134	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R335	T1001-00084A	C RESISTOR	22KΩ 1/16W J
R136	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R336	T1001-00086A	C RESISTOR	47KΩ 1/16W J
R138	T1001-00073A	C RESISTOR	10KΩ 1/16W J	R337	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R210	2401-002075	C RESISTOR	270Ω 1/16W J	R338	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R211	T2401-F70R1A	C RESISTOR	100Ω 1/16W J	R339	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R214	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R340	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R215	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R341	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R216	TA40-00016A	C RESISTOR	1KΩ 1/16W J	R342	T2203-FC101D	C RESISTOR	10Ω 1/16W J
R217	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R343	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R218	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R344	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R219	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R345	T2401-CT4700	C RESISTOR	100Ω 1/16W J
R220	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R346	2401-000914	C RESISTOR	100Ω 1/16W J
R223	T2801-00011A	C RESISTOR	470Ω 1/16W J	R347	2401-000914	C RESISTOR	100Ω 1/16W J
R224	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R348	2401-000914	C RESISTOR	100Ω 1/16W J
R225	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R349	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R226	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R350	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R227	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R351	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R228	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R352	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R229	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R353	T2203-FC221E	C RESISTOR	33Ω 1/16W J
R230	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R354	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R231	T2203-FC152D	C RESISTOR	33Ω 1/16W J	R355	2401-000914	C RESISTOR	100Ω 1/16W J
R232	T2801-00011A	C RESISTOR	470Ω 1/16W J	R356	2401-000914	C RESISTOR	100Ω 1/16W J
R233	T2203-FC221E	C RESISTOR	33Ω 1/16W J	R357	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R235	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R358	2401-000603	C RESISTOR	100Ω 1/16W J
R236	T2203-FC392D	C RESISTOR	75Ω 1/16W J	R359	2401-000603	C RESISTOR	100Ω 1/16W J
R237	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R360	T3711-00036	C RESISTOR	3.3KΩ 1/16W J
R238	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R361	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R239	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R363	T2801-00014A	C RESISTOR	680Ω 1/16W J
R242	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R364	T2203-FC102D	C RESISTOR	10Ω 1/16W J
R243	T3722-00054A	C RESISTOR	1KΩ 1/16W J	R365	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R244	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R367	2401-000603	C RESISTOR	100Ω 1/16W J
R245	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R370	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R246	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R371	T2401-CT4710	C RESISTOR	330Ω 1/16W J
R247	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R373	2401-000603	C RESISTOR	100Ω 1/16W J
R248	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R375	T1001-00064A	C RESISTOR	10KΩ 1/16W J
R249	T1001-00064A	C RESISTOR	10KΩ 1/16W J	R376	2401-002075	C RESISTOR	270Ω 1/16W J
R255	T2401-F70R1A	C RESISTOR	100Ω 1/16W J	R377	T2203-FC060D	C RESISTOR	0Ω 1/16W J
R256	T2203-FC471D	C RESISTOR	75Ω 1/16W J	R378	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R260	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R380	T1001-00083A	C RESISTOR	10KΩ 1/16W J
R261	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R382	2401-000603	C RESISTOR	100Ω 1/16W J
R262	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R383	T2801-00013A	C RESISTOR	560Ω 1/16W J
R263	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R385	2401-002235	C RESISTOR	100Ω 1/16W J
R264	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R390	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R267	T2203-FC472D	C RESISTOR	75Ω 1/16W J	R391	T2203-FC060D	C RESISTOR	0Ω 1/16W J
R271	T2401-F70R1A	C RESISTOR	100Ω 1/16W J	R392	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R272	T2401-F70R1A	C RESISTOR	100Ω 1/16W J	R393	2401-002235	C RESISTOR	100Ω 1/16W J
R273	2401-002075	C RESISTOR	270Ω 1/16W J	R394	T3722-00040A	C RESISTOR	1KΩ 1/16W J
R274	T2401-F70R1A	C RESISTOR	100Ω 1/16W J	R395	T2203-FC330D	C RESISTOR	0Ω 1/16W J
R275	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R396	T3711-00029	C RESISTOR	3.3KΩ 1/16W J
R277	T2203-FC060D	C RESISTOR	0Ω 1/16W J	R397	T3711-00029	C RESISTOR	3.3KΩ 1/16W J
R278	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R411	T2801-00011A	C RESISTOR	470Ω 1/16W J
R279	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R412	T2203-FC334D	C RESISTOR	68Ω 1/16W J
R280	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R413	2401-002235	C RESISTOR	100Ω 1/16W J
R281	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R414	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R282	T2203-FC104E	C RESISTOR	82Ω 1/16W J	R415	T2801-00014A	C RESISTOR	680Ω 1/16W J
R283	T2203-BC106E	C RESISTOR	82Ω 1/16W J	R416	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R285	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R417	T2203-DC104E	C RESISTOR	22Ω 1/16W J
R286	T1001-00085A	C RESISTOR	27KΩ 1/16W J	R418	T3711-00019	C RESISTOR	4.7KΩ 1/16W J
R287	T2203-FC470D	C RESISTOR	4.7Ω 1/16W J	R419	T2203-FC100D	C RESISTOR	0Ω 1/16W J
R288	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R427	T1001-00052A	C RESISTOR	1MΩ 1/16W J
R289	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R429	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R290	2401-000269	C RESISTOR	100Ω 1/16W J	R432	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R291	2401-000269	C RESISTOR	100Ω 1/16W J	R434	T2203-FC222D	C RESISTOR	33Ω 1/16W J
R292	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R436	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R294	T2203-FC470D	C RESISTOR	4.7Ω 1/16W J	R442	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R295	T2203-FC473D	C RESISTOR	75Ω 1/16W J	R456	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R296	T3722-00040A	C RESISTOR	1KΩ 1/16W J	R457	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R299	T2203-FC221E	C RESISTOR	33Ω 1/16W J	R458	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R304	2401-000269	C RESISTOR	100Ω 1/16W J	R459	T2203-FC682D	C RESISTOR	75Ω 1/16W J
R305	2401-000269	C RESISTOR	100Ω 1/16W J	R460	T3711-00038	C RESISTOR	4.7KΩ 1/16W J
R307	2401-000269	C RESISTOR	100Ω 1/16W J	R461	T1001-00070A	C RESISTOR	470KΩ 1/16W J
R308	2401-001495	C RESISTOR	100Ω 1/16W J	R462	T3711-00038	C RESISTOR	4.7KΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R501	T1001-00083A	C RESISTOR	10KΩ 1/16W J	R712	T1001-00088A	C RESISTOR	100KΩ 1/16W J
R504	T3711-00038	C RESISTOR	4.7KΩ 1/16W J	R713	T1001-00084A	C RESISTOR	22KΩ 1/16W J
R505	T1001-00087A	C RESISTOR	100KΩ 1/16W J	R801	T1001-00083A	C RESISTOR	10KΩ 1/16W J
R509	2007-001167	CHIP BEAD	30Ω	R802	T3711-00037	C RESISTOR	4.7KΩ 1/16W J
R510	2007-001167	CHIP BEAD	30Ω	R803	2401-002075	C RESISTOR	270Ω 1/16W J
R511	2007-001167	CHIP BEAD	30Ω	R804	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R515	2007-001167	CHIP BEAD	30Ω	R805	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R516	2007-001167	CHIP BEAD	30Ω	R806	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R517	2007-000115	CHIP BEAD	30Ω	R810	T2203-FC220D	C RESISTOR	0Ω 1/16W J
R518	2007-000115	CHIP BEAD	30Ω	R2215	T2203-FC332D	C RESISTOR	47Ω 1/16W J
R519	2007-000115	CHIP BEAD	30Ω	R2219	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R529	T2203-FC100D	C RESISTOR	0Ω 1/16W J	R2220	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R540	T2203-FC102D	C RESISTOR	10Ω 1/16W J	R2221	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R541	2007-000115	CHIP BEAD	30Ω	R2222	T2203-FC104D	C RESISTOR	22Ω 1/16W J
R542	2007-000115	CHIP BEAD	30Ω	R2223	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R543	2007-000074	CHIP BEAD	30Ω	R2224	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R544	T2203-FC104D	C RESISTOR	22Ω 1/16W J	R2225	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R546	2007-000074	CHIP BEAD	30Ω	R2226	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R548	2007-000074	CHIP BEAD	30Ω	R2227	T2203-CC105D	C RESISTOR	22Ω 1/16W J
R550	2007-000074	CHIP BEAD	30Ω	R2228	T2203-FC150D	C RESISTOR	22Ω 1/16W J
R560	2007-000074	CHIP BEAD	30Ω	R2290	T3711-00033	C RESISTOR	1KΩ 1/16W J
R561	2007-000402	CHIP BEAD	30Ω	R2291	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R562	2007-000402	CHIP BEAD	30Ω	R2292	AA60-40014A	C RESISTOR	4.7KΩ 1/16W J
R563	2007-000402	CHIP BEAD	30Ω	R2293	T1001-00081A	C RESISTOR	4.7KΩ 1/16W J
R565	2007-000402	CHIP BEAD	30Ω	RA01	T2203-FC220D	C RESISTOR	0Ω 1/16W J
R566	T2203-FC102D	C RESISTOR	10Ω 1/16W J	RA02	T2203-FC330D	C RESISTOR	0Ω 1/16W J
R567	2007-000402	CHIP BEAD	30Ω	RA03	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R568	T2203-FC102D	C RESISTOR	10Ω 1/16W J	RA04	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R571	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA05	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R572	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA06	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R573	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA07	T2203-FC224D	C RESISTOR	33Ω 1/16W J
R574	2401-002235	C RESISTOR	100Ω 1/16W J	RA08	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R575	T2203-FC334D	C RESISTOR	68Ω 1/16W J	RA09	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R577	2007-000075	CHIP BEAD	30Ω	RA10	T2203-FC331D	C RESISTOR	33Ω 1/16W J
R579	2007-000075	CHIP BEAD	30Ω	L201	2007-000309	CHIP BEAD	80Ω
R582	2007-000075	CHIP BEAD	30Ω	L202	2007-000309	CHIP BEAD	80Ω
R583	2007-000075	CHIP BEAD	30Ω	L203	2007-000309	CHIP BEAD	80Ω
R584	2007-000075	CHIP BEAD	30Ω	L204	2007-000309	CHIP BEAD	80Ω
R585	2007-000643	CHIP BEAD	30Ω	L205	2007-000309	CHIP BEAD	80Ω
R586	2007-000643	CHIP BEAD	30Ω	L206	2007-000071	CHIP BEAD	80Ω
R587	2007-000643	CHIP BEAD	30Ω	L207	2007-000071	CHIP BEAD	80Ω
R588	2007-000643	CHIP BEAD	30Ω	L208	2007-000071	CHIP BEAD	80Ω
R589	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L209	2007-000071	CHIP BEAD	80Ω
R591	2007-000643	CHIP BEAD	30Ω	L210	2007-000071	CHIP BEAD	80Ω
R592	2007-000076	CHIP BEAD	30Ω	L211	2007-000113	CHIP BEAD	80Ω
R593	T3722-00040A	C RESISTOR	1KΩ 1/16W J	L214	2007-000113	CHIP BEAD	80Ω
R594	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L215	2007-000113	CHIP BEAD	80Ω
R595	T3711-00038	C RESISTOR	4.7KΩ 1/16W J	L216	2007-000113	CHIP BEAD	80Ω
R596	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L217	2007-000113	CHIP BEAD	80Ω
R597	T2401-BT102A	C RESISTOR	390Ω 1/16W J	L218	2007-000072	CHIP BEAD	80Ω
R601	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L219	2007-000072	CHIP BEAD	80Ω
R602	T1001-00063A	C RESISTOR	68KΩ 1/16W J	L220	2007-000072	CHIP BEAD	80Ω
R603	2401-000242	C RESISTOR	150Ω 1/16W J	L221	2007-000072	CHIP BEAD	80Ω
R604	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L302	2007-000072	CHIP BEAD	80Ω
R605	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L303	2007-001134	CHIP BEAD	80Ω
R606	T1001-00086A	C RESISTOR	47KΩ 1/16W J	L304	2007-001134	CHIP BEAD	80Ω
R607	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L305	2007-001134	CHIP BEAD	80Ω
R608	T1001-00075A	C RESISTOR	30KΩ 1/16W J	L306	2007-000093	CHIP BEAD	500Ω
R609	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L317	T2007-HC330J	CHIP COIL	10uH
R610	T1001-00075A	C RESISTOR	30KΩ 1/16W J	L401	2007-000093	CHIP BEAD	500Ω
R611	T3722-00041A	C RESISTOR	1KΩ 1/16W J	L402	2007-000093	CHIP BEAD	500Ω
R612	T1001-00086A	C RESISTOR	47KΩ 1/16W J	L404	2007-000093	CHIP BEAD	500Ω
R613	2401-002235	C RESISTOR	100Ω 1/16W J	L405	2007-000093	CHIP BEAD	500Ω
R614	2401-002594	C RESISTOR	100Ω 1/16W J	L406	2007-000094	CHIP BEAD	500Ω
R615	2401-002594	C RESISTOR	100Ω 1/16W J	L408	2007-000094	CHIP BEAD	500Ω
R616	2401-002594	C RESISTOR	100Ω 1/16W J	L501	2007-000094	CHIP BEAD	500Ω
R617	2401-002594	C RESISTOR	100Ω 1/16W J	L502	2007-000094	CHIP BEAD	500Ω
R618	2401-002594	C RESISTOR	100Ω 1/16W J	L504	2007-000094	CHIP BEAD	500Ω
R619	T2203-FC100D	C RESISTOR	0Ω 1/16W J	L505	2007-000129	CHIP BEAD	500Ω
R620	T2203-FC100D	C RESISTOR	0Ω 1/16W J	L507	2007-000129	CHIP BEAD	500Ω
R621	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L509	2007-000129	CHIP BEAD	500Ω
R622	T2203-FC220D	C RESISTOR	0Ω 1/16W J	L510	2007-000129	CHIP BEAD	500Ω
R623	T1001-00083A	C RESISTOR	10KΩ 1/16W J	L511	2007-000129	CHIP BEAD	500Ω
R624	T1001-00082A	C RESISTOR	20KΩ 1/16W J	L512	2007-000096	CHIP BEAD	500Ω
R625	T3711-00033	C RESISTOR	1KΩ 1/16W J	L513	2007-000096	CHIP BEAD	500Ω
R629	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L514	2007-000096	CHIP BEAD	500Ω
R630	T1001-00082A	C RESISTOR	20KΩ 1/16W J	L515	2007-000096	CHIP BEAD	500Ω
R631	T1001-00083A	C RESISTOR	10KΩ 1/16W J	L516	2007-000096	CHIP BEAD	500Ω
R632	T2203-FC102D	C RESISTOR	10Ω 1/16W J	L517	2007-000097	CHIP BEAD	500Ω
R633	T3711-00037	C RESISTOR	4.7KΩ 1/16W J	L5VA	2007-000120	CHIP BEAD	80Ω
R701	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L5VB	2007-000120	CHIP BEAD	80Ω
R702	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L5VC	2007-000121	CHIP BEAD	80Ω
R703	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L601	T2007-HC472J	CHIP COIL	10uH
R704	T2801-00013A	C RESISTOR	560Ω 1/16W J	L602	T2007-HC472J	CHIP COIL	10uH
R705	T2801-00012A	C RESISTOR	820Ω 1/16W J	L603	2007-000097	CHIP BEAD	500Ω
R707	T2203-FC103D	C RESISTOR	10Ω 1/16W J	L606	2007-000097	CHIP BEAD	500Ω
R708	T2401-CT221O	C RESISTOR	100Ω 1/16W J	L608	2007-000097	CHIP BEAD	500Ω
R709	T2203-FC103D	C RESISTOR	10Ω 1/16W J	L610	2007-000121	CHIP BEAD	80Ω
R710	T3711-00033	C RESISTOR	1KΩ 1/16W J	L701	2007-000109	CHIP COIL	10uH
R711	T2203-FC330D	C RESISTOR	0Ω 1/16W J				

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
L703	2007-000102	SMD COIL	680uH		CE626	T2203-FC100D	E CAPACITOR	1uF 50V M	
L705	2007-000100	SMD COIL	470uH		CE627	2007-000102	E CAPACITOR	47uF 16V M	
L801	2007-000118	CHIP BEAD	80Ω		CE630	T2007-HC472J	E CAPACITOR	22uF 16V M	
L802	2007-000118	CHIP BEAD	80Ω		CE701	2007-000100	E CAPACITOR	100uF 16V M	
L803	2007-000118	CHIP BEAD	80Ω		CE702	T2203-FC102D	E CAPACITOR	10uF 16V M	
L804	2007-000118	CHIP BEAD	80Ω		CE703	2007-000100	E CAPACITOR	100uF 16V M	
L805	2007-000118	CHIP BEAD	80Ω		CE704	2007-000100	E CAPACITOR	100uF 16V M	
L806	2007-000077	CHIP BEAD	80Ω		CE705	T2203-FC100D	E CAPACITOR	1uF 50V M	
L807	2007-000077	CHIP BEAD	80Ω		CE801	T2203-FC103D	E CAPACITOR	220uF 16V M	
L808	2007-000077	CHIP BEAD	80Ω		CE802	T2203-FC221E	E CAPACITOR	470uF 16V M	
L809	2007-000077	CHIP BEAD	80Ω		CE803	2007-000107	E CAPACITOR	47uF 16V M	
L810	2007-000077	CHIP BEAD	80Ω		CE804	2007-000100	E CAPACITOR	100uF 16V M	
L812	2007-000119	CHIP BEAD	80Ω		CE805	T2203-DC104E	E CAPACITOR	220uF 16V M	
L813	2007-000119	CHIP BEAD	80Ω		CE808	T2203-FC104D	E CAPACITOR	220uF 16V M	
L814	2007-000107	SMD COIL	100uH		CE809	T2203-FC224D	E CAPACITOR	1000uF 10V M	
L815	2007-000119	CHIP BEAD	80Ω		CE810	T2203-FC222D	E CAPACITOR	470uF 16V M	
L816	2007-000119	CHIP BEAD	80Ω		CE811	T2203-DC104E	E CAPACITOR	220uF 16V M	
L820	2007-000119	CHIP BEAD	80Ω		J101	2401-002594	CONNECTOR		
L821	2007-000120	CHIP BEAD	80Ω		J102	T2401-CT221O	CONNECTOR		
L822	2007-000120	CHIP BEAD	80Ω		J201	T2203-FC472D	JACK	PC IN	
L823	2007-000120	CHIP BEAD	80Ω		J202	T2203-FC473D	JACK	EXT2	
L830	T3711-00033	C RESISTOR	1KΩ 1/16W J		J203	T2203-FC682D	JACK	EXT-1	
LA01	2007-000121	CHIP BEAD	80Ω		J205	T2203-FC104E	JACK	EXT-3/EXT4	
LA02	2007-000121	CHIP BEAD	80Ω		J209	T2401-FT0R1A	CONNECTOR		
CE101	2007-000097	E CAPACITOR	100uF 16V M		J210	2401-000269	CONNECTOR		
CE102	2007-000107	E CAPACITOR	47uF 16V M		J303	T2203-BC106E	CONNECTOR		
CE103	2007-000109	E CAPACITOR	22uF 16V M		J304	2401-001495	CONNECTOR		
CE105	T2203-FC220D	E CAPACITOR	10uF 16V M		J501	2401-000603	CONNECTOR		
CE107	T2203-FC060D	E CAPACITOR	1uF 50V M		J601	T2401-CT470O	CONNECTOR		
CE108	2007-000096	E CAPACITOR	0.1uF 50V M		J602	2401-000914	CONNECTOR		
CE202	T2203-FC220D	E CAPACITOR	10uF 16V M		J801	2401-002235	CONNECTOR		
CE203	T2203-FC220D	E CAPACITOR	10uF 16V M		RN301	2007-000084	BEAD ARRAY	120Ω	
CE204	T2203-FC220D	E CAPACITOR	10uF 16V M		RN302	2007-000084	BEAD ARRAY	120Ω	
CE205	T2203-FC220D	E CAPACITOR	10uF 16V M		RN303	2007-000084	BEAD ARRAY	120Ω	
CE206	T2203-FC103D	E CAPACITOR	220uF 16V M		RN304	2007-000084	BEAD ARRAY	120Ω	
CE207	T2203-FC103D	E CAPACITOR	220uF 16V M		RN305	2007-000084	BEAD ARRAY	120Ω	
CE220	2007-000097	E CAPACITOR	100uF 16V M		RN306	2007-000090	BEAD ARRAY	120Ω	
CE221	2007-000097	E CAPACITOR	100uF 16V M		RN307	2007-000090	BEAD ARRAY	120Ω	
CE301	T2203-FC150D	E CAPACITOR	100uF 10V M		RN308	T1001-00079A	CHIP ARRAY	4.7KΩ 1/16W J	
CE302	T2203-CC105D	E CAPACITOR	100uF 10V M		RN309	2007-000090	BEAD ARRAY	120Ω	
CE402	2007-000109	E CAPACITOR	22uF 16V M		RN310	T1001-00079A	CHIP ARRAY	4.7KΩ 1/16W J	
CE404	T2203-FC330D	E CAPACITOR	10uF 16V M		RN408	2007-000078	BEAD ARRAY	30Ω	
CE405	T2203-FC330D	E CAPACITOR	10uF 16V M		RN409	2007-000078	BEAD ARRAY	30Ω	
CE407	T2203-FC330D	E CAPACITOR	10uF 16V M		RN410	2007-000078	BEAD ARRAY	30Ω	
CE408	T2203-FC330D	E CAPACITOR	10uF 16V M		RN411	2007-000078	BEAD ARRAY	30Ω	
CE410	T2203-FC221E	E CAPACITOR	470uF 16V M		RN412	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE411	T2203-FC152D	E CAPACITOR	4.7uF 50V M		RN413	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE412	T2203-FC330D	E CAPACITOR	10uF 16V M		RN414	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE413	T2203-FC470D	E CAPACITOR	10uF 16V M		RN415	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE414	T2203-FC152D	E CAPACITOR	4.7uF 50V M		RN416	T1001-00049A	CHIP ARRAY	33Ω 1/16W J	
CE415	T2203-FC470D	E CAPACITOR	10uF 16V M		RN417	T1001-00078A	CHIP ARRAY	33Ω 1/16W J	
CE416	T2203-FC152D	E CAPACITOR	4.7uF 50V M		RN418	T1001-00078A	CHIP ARRAY	33Ω 1/16W J	
CE502	T2203-FC104D	E CAPACITOR	220uF 16V M		RN503	2007-000081	BEAD ARRAY	30Ω	
CE503	2007-000097	E CAPACITOR	100uF 16V M		RN505	2007-000081	BEAD ARRAY	30Ω	
CE504	2007-000107	E CAPACITOR	47uF 16V M		RN508	2007-000081	BEAD ARRAY	30Ω	
CE506	2007-000109	E CAPACITOR	22uF 16V M		RN509	2007-000081	BEAD ARRAY	30Ω	
CE507	2007-000109	E CAPACITOR	22uF 16V M		RN510	2007-000082	BEAD ARRAY	30Ω	
CE508	2007-000102	E CAPACITOR	47uF 16V M		RN511	2007-000082	BEAD ARRAY	30Ω	
CE509	2007-000109	E CAPACITOR	22uF 16V M		RN512	2007-000082	BEAD ARRAY	30Ω	
CE510	T2007-HC330J	E CAPACITOR	22uF 16V M		RN513	2007-000078	BEAD ARRAY	30Ω	
CE511	T2007-HC330J	E CAPACITOR	22uF 16V M		RN514	2007-000082	BEAD ARRAY	30Ω	
CE512	T2007-HC330J	E CAPACITOR	22uF 16V M		RN515	2007-000123	BEAD ARRAY	30Ω	
CE513	T2007-HC330J	E CAPACITOR	22uF 16V M		RN516	2007-000123	BEAD ARRAY	30Ω	
CE514	T2007-HC330J	E CAPACITOR	22uF 16V M		RN517	2007-000123	BEAD ARRAY	30Ω	
CE515	T2007-HC472J	E CAPACITOR	22uF 16V M		RN518	2007-000123	BEAD ARRAY	30Ω	
CE516	T2007-HC472J	E CAPACITOR	22uF 16V M		RN519	2007-000123	BEAD ARRAY	30Ω	
CE517	T2203-FC470D	E CAPACITOR	10uF 16V M		RN520	2007-000081	BEAD ARRAY	30Ω	
CE518	2007-000097	E CAPACITOR	100uF 16V M		X301	T2203-FC331D	CRYSTAL	6MHz	
CE601	T2203-FC103D	E CAPACITOR	220uF 16V M		X401	T2203-FC392D	CRYSTAL	27MHz	
CE602	T2203-FC103D	E CAPACITOR	220uF 16V M		X501	T2203-FC332D	CRYSTAL	14.318MHz	
CE603	2007-000102	E CAPACITOR	47uF 16V M		X601	T2203-FC334D	CRYSTAL	18.432MHz	
CE604	2007-000102	E CAPACITOR	47uF 16V M						
CE605	T2203-FC060D	E CAPACITOR	1uF 50V M						
CE606	T2203-CC105D	E CAPACITOR	100uF 10V M						
CE607	T2203-FC470D	E CAPACITOR	10uF 16V M						
CE608	T2203-FC470D	E CAPACITOR	10uF 16V M						
CE609	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE610	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE611	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE612	2007-000102	E CAPACITOR	47uF 16V M						
CE613	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE614	T2203-FC101D	E CAPACITOR	10uF 16V M						
CE617	T2203-FC102D	E CAPACITOR	10uF 16V M						
CE620	T2203-FC102D	E CAPACITOR	10uF 16V M						
CE621	T2203-FC102D	E CAPACITOR	10uF 16V M						
CE622	T2203-FC060D	E CAPACITOR	1uF 50V M						
CE623	T2203-FC060D	E CAPACITOR	1uF 50V M						
CE624	T2203-FC102D	E CAPACITOR	10uF 16V M						
CE625	T2203-FC060D	E CAPACITOR	1uF 50V M						

## POWER P.W. BOARD ASS'Y (QAL0826-001)

REFER TO PARTS LIST IN PAGE 3-10 FOR THIS P.W. BOARD.

## LED P.W. BOARD ASS'Y (QAL0827-001)

REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.


## KEY P.W. BOARD ASS'Y (QAL0828-001)

REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.

# REMOTE CONTROL UNIT PARTS LIST (RM-C1816S-2C)

△ Ref.No.	Part No.	Part Name	Description	Local
	2AA070311	BATTERY COVER		

## PACKING

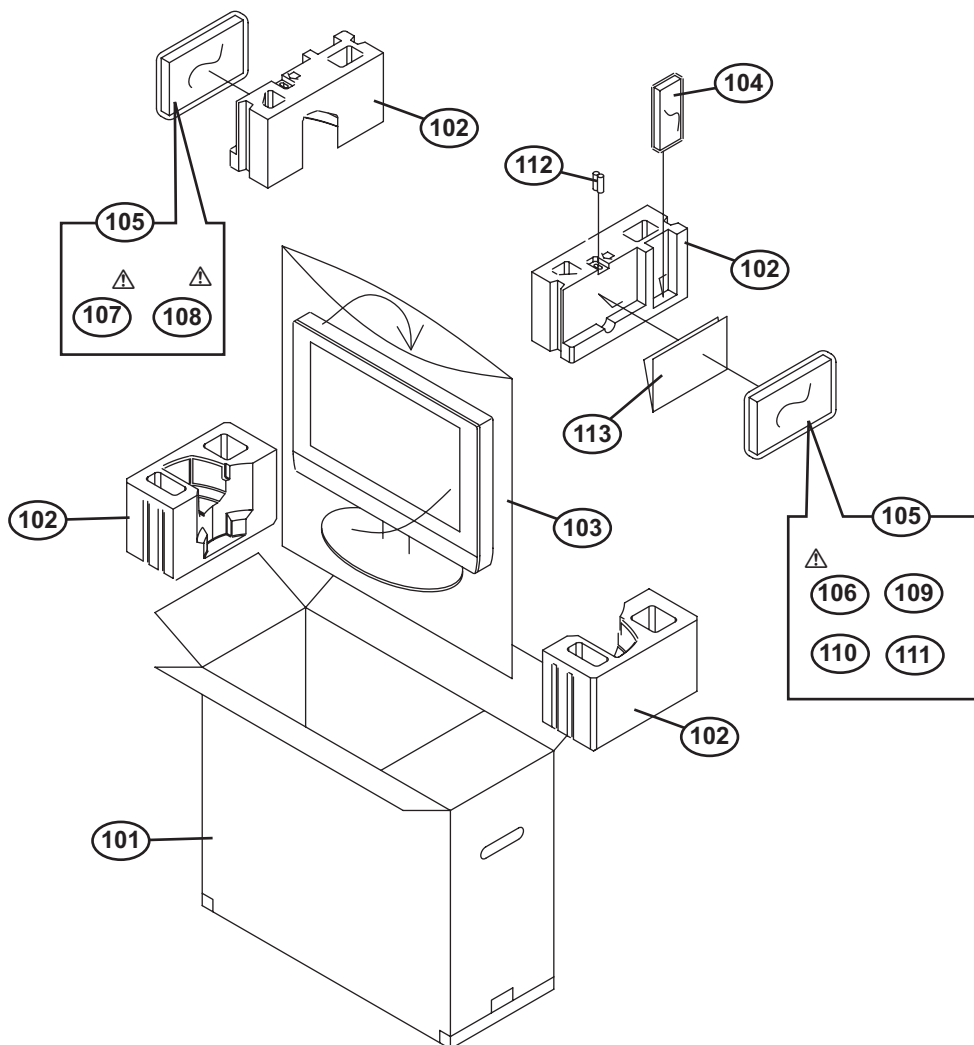

## PACKING PARTS LIST

△ Ref.No.	Part No.	Part Name	Description	Local
101	GA10002-056A-U	PACKING CASE		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
101	GA10002-057B-U	PACKING CASE		LT-32A61BJ,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
102	GA10046-001A-U	CUSHION ASSY	4pcs in 1set	LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
102	GA10049-001A-U	CUSHION ASSY	4pcs in 1set	LT-32A61BJ,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
103	GA10026-001A-U	FOAM BAG		LT-26A61BJ,LT-26A61BU,LT-26A61BU/C,LT-26A61SJ,LT-26A61SU,LT-26A61SU/C
103	GA10026-002A-U	FOAM BAG		LT-32A61BJ,LT-32A61BU,LT-32A61BU/C,LT-32A61SJ,LT-32A61SU,LT-32A61SU/C
104	RM-C1816S-2C	REMOTE CONTROL UNIT		
105	GA30007-001A-U	DOCUMENT BAGS		LT-26A61BJ,LT-26A61SJ,LT-32A61BJ,LT-32A61SJ
105	GA30007-001A-U	DOCUMENT BAGS	(x2)	LT-26A61BU,LT-26A61BU/C,LT-26A61SU,LT-26A61SU/C,LT-32A61BU,LT-32A61BU/C,LT-32A61SU,LT-32A61SU/C
△ 106	LCT1999-001A-U	INST BOOK	English	LT-26A61BJ,LT-26A61SJ,LT-32A61BJ,LT-32A61SJ
△ 106	LCT1996-001A-U	INST BOOK	English/German/French/Dutch/Spanish/Italian/Portuguese	LT-26A61BU,LT-26A61BU/C,LT-26A61SU,LT-26A61SU/C,LT-32A61BU,LT-32A61BU/C,LT-32A61SU,LT-32A61SU/C
△ 106	LCT1996-001B-U	INST BOOK	English/German/French/Dutch/Spanish/Italian/Portuguese	LT-26A61BJ,LT-26A61SJ,LT-32A61BJ,LT-32A61SJ
△ 107	LCT1997-001A-U	INST BOOK	Norwegian/Finn/Danish/Swedish	LT-26A61BU,LT-26A61BU/C,LT-26A61SU,LT-26A61SU/C,LT-32A61BU,LT-32A61BU/C,LT-32A61SU,LT-32A61SU/C
△ 107	LCT1997-001B-U	INST BOOK	Norwegian/Finn/Danish/Swedish	LT-26A61BJ,LT-26A61SJ,LT-32A61BJ,LT-32A61SJ
△ 108	LCT1998-001A-U	INST BOOK	Russian/Polish/Czech/Hungarian/Romanian/Bulgarian	LT-26A61BU,LT-26A61BU/C,LT-26A61SU,LT-26A61SU/C,LT-32A61BU,LT-32A61BU/C,LT-32A61SU,LT-32A61SU/C
△ 108	LCT1998-001B-U	INST BOOK	Russian/Polish/Czech/Hungarian/Romanian/Bulgarian	LT-26A61BJ,LT-26A61SJ,LT-32A61BJ,LT-32A61SJ
109	-----	WARRANTY CARD	BT-54027-1E	
110	LCT1923-001A-U	SHEET(WEEE)-E		LT-26A61BJ,LT-26A61SJ,LT-32A61BJ,LT-32A61SJ
110	LCT1923-002A-U	SHEET(WEEE)-E		LT-26A61BU,LT-26A61BU/C,LT-26A61SU,LT-26A61SU/C,LT-32A61BU,LT-32A61BU/C,LT-32A61SU,LT-32A61SU/C
111	GA30011-001A-U	REGISTRATION CARD		LT-26A61BJ,LT-26A61SJ,LT-32A61BJ,LT-32A61SJ
112	-----	BATTERY	R6P/AA(x2)	
113	LCT1504-001A-U	CAUTION SHEET		